



USER MANUAL

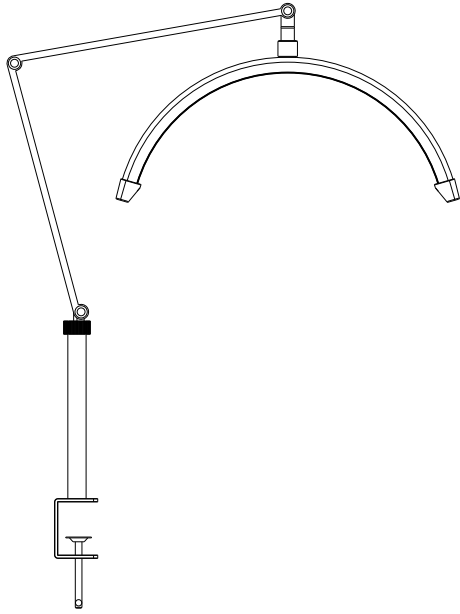


1. Technical

Model	HD-M3X
Input power	110V/240V 50Hz/60Hz
Output power	20W
Adjustment range	10 levels for each mode
CCT	3000K/4500K/6000K
CRI	RA>90
Lumen	1800LM
Size	400*200*40mm
Weight	1.4kg

2. Detail

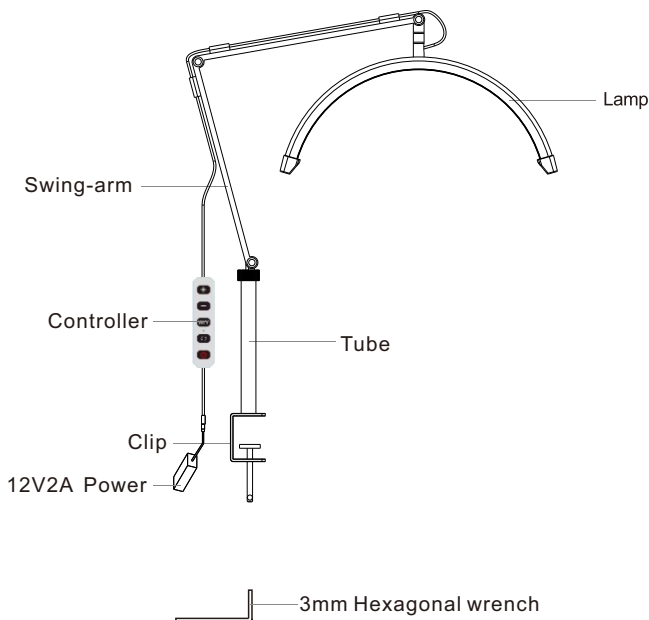

3. Assembly Instructions

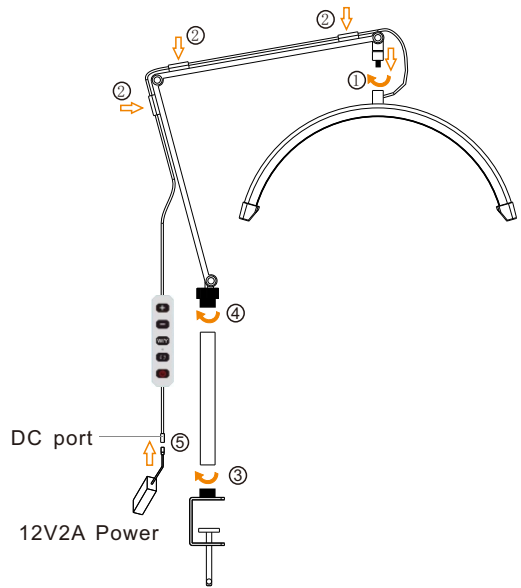


3. 1 Rotate the top screw of swing-arm to connect with lamp.
3. 2 Put the controller wire into the three fixed wire slots of the swing arm;
3. 3 Connect clip and tube;
3. 4 Connect tube and swing-arm;
3. 5 Connect power cable with DC cable port, then finished and you can put on the lamp.

* The joint position of the swing arm is loose/tight. When it is used for the first time, the 3mm hexagonal wrench can be used for loose/tight adjustment to achieve a proper swing force.

4. Adjustment instruction

4.1 Controller

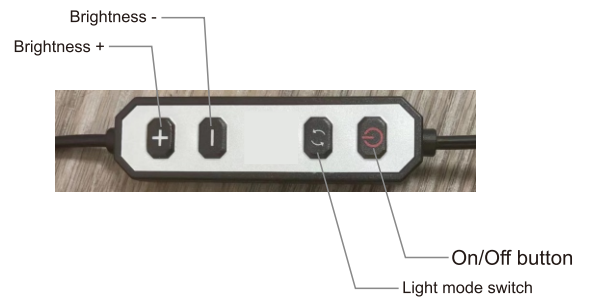

5. Packing list

1. Lamp*1
2. 12V2A power adapter*1
3. Swing-arm*1
4. Tube*1
5. Clip*1
6. 3mm Hexagonal wrench*1