

TEST REPORT

EN 60335-1

Safety of household and similar electrical appliances

Part 1: General Requirements

Report Number.....:	KTI260325S1476	
Tested by (+ signature).....:	Wisdom Xu	
Reviewed by (+ signature)... ..:	Taoist Wang	
Approved by (+ signature)... ..:	Store Chu	
Date of issue.....:	Apr. 08, 2026	
Total number of pages.....:	82 pages	
Testing Laboratory Name.....:	Guangdong KAIXU Testing Technology Co., Ltd	
Address.....:	Room 215, Building 2, No. 123, Dongcheng Section, Guanlong Road, Dongcheng Street, Dongguan City, Guangdong Province, China	
Applicant's name.....:	Guangzhou SNRQI Technology Co., Ltd.	
Address.....:	Room 202, Building A, No. 33, 3rd Road, Wanggang Industrial Zone, Jiahe Street, Baiyun District, Guangzhou	
Manufacturer name.....:	Foshan Mikesi Technology Co.,Ltd.	
Address.....:	3rd Floor, Gate A, Building F12, Aipuda Industrial Park, No. 33 Koler Avenue, Leping Town, Sanshui District, Foshan City	
Test specification:		
Standard.....:	EN 60335-1:2012 + A11:2014 + A13:2017 + A1:2019 + A14:2019 + A2:2019 + A15:2021 + A16:2023 EN 62233:2008	
Test procedure.....:	CE-LVD	
Non-standard test method.....:	N/A	
Test Report Form No.....:	IEC60335_1X	
Test Report Form(s) Originator.....:	Nemko AS	
Master TRF.....:	Dated 2016-10	
Test item description.....:	PND750 Nail Drill Machine	
Trade Mark.....:	N/A	
Model/Type reference.....:	750	
Ratings.....:	Input: DC5V, 2A Output: DC24V Battery: DC7.4V, 2600mAh, 19.24Wh	

General remarks

This report shall not be reproduced except in full without the written approval of the testing laboratory.

The test results presented in this report relate only to the item(s) tested.

"(see remark #)" refers to a remark appended to the report.

"(see Annex #)" refers to an annex appended to the report.

Throughout this report a comma is used as the decimal separator.

Copy of marking plate:

PND750 Nail Drill Machine

Model: 750

Input: DC5V, 2A

Output: DC24V

Battery: DC7.4V, 2600mAh, 19.24Wh



WARNING – To reduce the risk of injury, user must read instruction manual

**Foshan Mikesi Technology Co.,Ltd.
Made in China**

Importer:xxx..
Importer Address:xxx..

Note:

The heights of CE symbol less than 5mm and WEEE 7mm.

The importer information should be marked in label when this product import to European Market.

Test item particulars..... :	
Classification of installation and use..... :	Hand-held appliance, Class III
Supply Connection..... :	DC inlet
..... :	
Possible test case verdicts:	
- test case does not apply to the test object..... :	N/A
- test object does meet the requirement..... :	P (Pass)
- test object does not meet the requirement..... :	F (Fail)
Testing..... :	
Date of receipt of test item..... :	2026-03-23
Date (s) of performance of tests..... :	2026-03-23 to 2026-04-01
General remarks:	
"(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report.	
Throughout this report a ☐ comma / ☒ point is used as the decimal separator.	
Name and address of factory (ies)..... :	Same as Manufacturer
General product information:	
1. The appliance is handheld appliance of class III for household use.	

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict

5	GENERAL CONDITIONS FOR THE TESTS		-
	Tests performed according to cl. 5, e.g. nature of supply, sequence of testing, etc.		P

6	CLASSIFICATION		-
6.1	Protection against electric shock: Class I, II, III	Class III	P
6.2	Protection against harmful ingress of water	IPX0	P

7	MARKING		-
7.1	Rated voltage or voltage range (V)	See marking label	P
	Symbol for nature of supply, or.....	==	P
	Rated frequency or frequency range (Hz)		N
	Rated power input (W), or.....		N
	Rated current (A).....	See marking label	P
	Manufacturer's or responsible vendor's name, trademark or identification mark	See marking label	P
	Model or type reference	See marking label	P
	Symbol IEC 60417-5172, for class II appliances		N
	IP number, other than IPX0	IPX0	N
	Symbol IEC 60417-5180, for class III appliances, unless		N
	for appliances powered by rechargeable batteries recharged in the appliance	powered by rechargeable batteries	N
	Symbol IEC 60417-5018, for class II and class III appliances incorporating a functional earth		N
	Symbol IEC 60417-5036, for the enclosure of electrically-operated water valves in external hose- sets for connection of an appliance to the water mains, if the working voltage exceeds extra-low voltage		N
7.2	Warning for stationary appliances	No such stationary appliance	N
	Warning placed in vicinity of terminal cover	Not placed in vicinity of terminal cover	N
7.3	Range of rated values correctly marked		P
7.4	Voltage setting clearly discernible	No such setting	N
7.5	Marking of rated input for each rated voltage		P
	Marking for upper and lower limits of rated input		N

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
7.6	Correct symbols used	See marking label	P
7.7	Correct connection diagram, fixed to the appliance		N
7.8	Not for type Z attachment:		N
	- marking of terminals for the neutral conductor (N)		P
	- marking of earthing terminals		N
	- marking not placed on removable parts		P
	- marking of terminal for single- pole protective device	No such protective device	P
7.9	Marking or placing of switches which may cause a hazard		P
7.10	Indications of switches and regulating devices by use of figures, letters or other		P
	The figure 0 indicates only OFF position, unless no confusion with the OFF position		P
7.11	Indication for direction of adjustment of controls		N
7.12	Instructions for safe use provided	Please see product manual	P
7.12.1	Sufficient details for installation or maintenance supplied		P
7.12.2	Stationary appliances not fitted with means for disconnection from the supply mains having a contact separation in all poles that provide full disconnection under overvoltage category III, the instructions state that means for disconnection must be incorporated in the fixed wiring in accordance with the wiring rules		N
7.12.3	Insulation of the fixed wiring in contact with parts exceeding 50 K during clause 11; instructions stating that the fixed wiring must be protected		N
7.12.4	Information with regard to built-in:	No built-in appliance	N
	- dimensions of space		N
	- dimensions and position of supporting means		N
	- distances between parts and surrounding structure		N
	- dimensions of ventilation openings and arrangement		N
	- connection to supply mains and interconnection of separate components		N
	- allow disconnection of the appliance after installation, by accessible plug or a switch in the fixed wiring, unless		N
	a switch complying with 24.3		N
7.12.5	Replacement cord, type X attachment		N
	Replacement cord, type Y attachment		N

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
	Replacement cord, type Z attachment		N
7.12.6	Caution in the instructions for heating appliances with a non-self-resetting thermal cut-out		N
7.12.7	Instructions for fixed appliances stating how the appliance is to be fixed		N
7.12.8	Instructions for appliances connected to the water mains:		N
	- max. inlet water pressure (Pa) :		N
	- min. inlet water pressure, if necessary (Pa):		N
	Instructions concerning new and old hose-sets for appliances connected to the water mains by detachable hose-sets		N
7.13	Instructions and other texts in official language	In English	P
7.14	Marking easily legible and durable	After testing, legible and durable	P
	Signal words WARNING, CAUTION, DANGER in uppercase having a height as specified.....:		P
	Uppercase letter of the text explaining the signal word not smaller than 1,6 mm.....:		P
	Moulded in, engraved, or stamped markings either raised above or have a depth below the surface of at least 0,25 mm, unless		P
	contrasting colours are used		P
	Markings checked by inspection, measurement and rubbing test as specified		P
7.15	Marking on a main part		P
	Marking clearly discernible from the outside, if necessary after removal of a cover		P
	For portable appliances, cover can be removed or opened without a tool		N
	For stationary appliances, name, trademark or identification mark and model or type reference visible after installation		P
	For fixed appliances, name, trademark or identification mark and model or type reference visible after installation according to the instructions		N
	Indications for switches and controls placed on or near the components. Marking not on parts which can be positioned or repositioned in such a way that the marking is misleading		N
7.16	Marking of a possible replaceable thermal link or fuse link clearly visible with regard to replacing the link		N

8	PROTECTION AGAINST ACCESS TO LIVE PARTS		-
8.1	Adequate protection against accidental contact with		P

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
	live parts		
8.1.1	All positions; detachable parts removed		P
	Removal of lamps: protection against contact with live parts	No such lamps	N
	Use of test probe B of IEC 61032: no contact with live parts		P
8.1.2	Use of test probe 13 of IEC 61032 through openings in class 0 appliances and class II appliances/constructions: no contact with live parts		P
	Test probe 13 also applied through openings in earthed metal enclosures having a non-conductive coating: no contact with live parts		N
8.1.3	Use of test probe: no contact with live parts of visible glowing heating elements	No visible glowing heating elements	N
8.1.4	Accessible part not considered live if:		P
	- extra-low a.c. voltage: peak values not exceeding 42,4 V		N
	- extra-low d.c. voltage: not exceeding 42,4 V	5VDC	P
	- or separated from live parts by protective impedance, d.c. current not exceeding 2 mA		N
	- or separated from live parts by protective impedance, a.c. peak value not exceeding 0,7 mA		N
	- for peak value 42,4 V up to and including 450 V capacitance not exceeding 0,1 μ F		N
	- for peak value 450 V up to and including 15 kV capacitance not exceeding 0,1 μ F		N
	- for voltages over 15 kV, the energy of the discharge shall not exceed 350 mJ		N
8.1.5	Live parts protected at least by basic insulation before installation or assembly:	No such constructions	-
	- built-in appliances		N
	- fixed appliances		N
	- separate units		N
8.2	Class II appliances and constructions adequately protected against accidental contact with basic insulation and metal parts separated from live parts with only basic insulation		N
	Only possible to touch parts separated from live parts by double or reinforced insulation		N

10	POWER INPUT AND CURRENT	-
-----------	--------------------------------	---

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
10.1	Power input at normal operating temperature, rated voltage and normal operation not deviating from rated power input by more than shown in table 1	(see appended table)	N
	Test for an appliance with one or more rated voltage ranges		N
10.2	Current at normal operating temperature, rated voltage and normal operation not deviating from rated current by more than shown in table 2	(see appended table)	P
	Test for an appliance with one or more rated voltage ranges		P

11	HEATING		-
11.1	No excessive temperatures in normal use	Comply with requirements	P
11.2	Placing and mounting of appliance as described		P
11.3	Temperature rises determined by thermocouples or resistance method	By thermocouples method	P
11.4	Heating appliances operated under normal operation at 1,15 times rated power input		N
11.5	Motor-operated appliances operated under normal operation at most unfavourable voltage between 0,94 and 1,06 times rated voltage		P
11.6	Combined appliances operated under normal operation, supply voltage at most unfavourable voltage between 0,94 and 1,06 times rated voltage		P
11.8	Temperature rises not exceeding values in table 3	(see appended tables)	P
	Sealing compound does not flow out		P
	Protective devices do not operate, except		P
	components in protective electronic circuits tested for the number of cycles specified in 24.1.4		N

13	LEAKAGE CURRENT AND ELECTRIC STRENGTH AT OPERATING TEMPERATURE		-
13.1	Leakage current not excessive and electric strength adequate		P
	Heating appliances operated at 1.15 times rated power input:		N
	Motor-operated appliances and combined appliances supplied at 1.06 times rated voltage :		P
	Protective impedance and radio interference filters disconnected before carrying out the tests		N
13.2	Leakage current measured by means of the circuit described in figure 4 of IEC 60990		P

EN 60335-1

Clause	Requirement Test	Result - Remark	Verdict
	Leakage current measurements	(see appended table)	P
13.3	Electric strength test of insulation	(see appended table)	P
	No breakdown during the test	No breakdown	P

14	TRANSIENT OVERVOLTAGES		-
	Appliances withstand the transient overvoltages to which they may be subjected		N
	Clearances having a value less than specified in table 16 subjected to an impulse voltage test, the test voltage specified in table 6		N
	No flashover during the test, unless of functional insulation		N
	In case of flashover of functional insulation, the appliance complies with clause 19 with the clearance short circuited		N

15	MOISTURE RESISTANCE		-
15.1	Enclosure provides the degree of moisture protection according to classification of appliance	IPX0	P
	Compliance checked as specified in 15.1.1, taking into account 15.1.2, followed by the electric strength test of 16.3		P
	No trace of water on insulation which can result in a reduction of clearances and creepage distances below values specified in clause 29		P
15.1.1	Appliances, other than IPX0, subjected to tests as specified in IEC 60529 :		N
	Water valves in external hoses for connection of an appliance to the water mains tested as specified for IPX7 appliances		N
15.1.2	Hand-held appliance turned continuously through the most unfavourable positions during the test		N
	Built-in appliance installed according to the manufacturer's instruction		N
	Appliances placed or used on the floor or table placed on a horizontal unperforated support		N
	Appliances normally fixed to a wall and appliances with pins for insertion into socket-outlets are mounted on a wooden board		N
	For IPX3 appliances, the base of wall mounted appliances is placed at the same level as the pivot axis of the oscillating tube		N

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
	For IPX4 appliances, the horizontal centre line of the appliance is aligned with the pivot axis of the oscillating tube		N
	However, for appliances normally used on the floor or table, the movement is limited to two times 90° for a period of 5 min, the support being placed at the level of the pivot axis of the oscillating tube		N
	Appliances normally fixed to a ceiling are mounted underneath a horizontal unperforated support, the pivot axis of the oscillating tube located at the level of the underside of the support		N
	For IPX4 appliances, the movement of the tube is limited to two times 90° from the vertical for a period of 5 min		N
	Wall-mounted appliances, take into account the distance to the floor stated in the instructions		N
	Appliances with type X attachment fitted with a flexible cord as described		N
	Detachable parts tested as specified		N
15.2	Spillage of liquid does not affect the electrical insulation		N
	Appliances with type X attachment fitted with a flexible cord as described		N
	Appliances incorporating an appliance inlet tested with or without an connector, whichever is most unfavourable		N
	Detachable parts removed		N
	Overfilling test with additional amount of water, over a period of 1 min (I):		N
	The appliance withstands the electric strength test of 16.3		N
	No trace of water on insulation that can result in a reduction of clearances and creepage distances below values specified in clause 29		N
	spillage tests with a deviation (°) from the normal position:		N
15.3	Humidity treatment for 48 h	93%, 30 °C, 48 h	P
	Withstanding the test of Cl. 16		P

16	LEAKAGE CURRENT AND ELECTRIC STRENGTH		-
16.1	No excessive leakage current and adequate insulation and electric strength (tests 16.2 and 16.3)		P
16.2	Leakage current measurements	(see appended table)	P

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
16.3	Electric strength tests (values in table 7)	(see appended table)	P
	No breakdown during the tests		P

17	OVERLOAD PROTECTION OF TRANSFORMERS AND ASSOCIATED CIRCUITS		-
	No excessive temperatures in transformer or associated circuits in event of short-circuits likely to occur in normal use		N
	Appliance supplied with 1,06 or 0,94 times rated voltage and the most unfavourable short-circuit or overload likely to occur in normal use applied		N
	Temperature rise of insulation of the conductors of safety extra-low voltage circuits not exceeding the relevant value specified in table 3 by more than 15 K		N
	Temperature of the winding not exceeding the value specified in table 8		N
	however limits do not apply to fail-safe transformers complying with sub-clause 15.5 of IEC 61558-1		N

18	ENDURANCE		-
	Requirements and tests are specified in part 2 when necessary		N

19	ABNORMAL OPERATION		-
19.1	The risk of fire or mechanical damage under abnormal or careless operation obviated		P
	Electronic circuits so designed and applied that a fault will not render the appliance unsafe		P
	Appliances incorporating contactors or relays subjected to the test of 19.14, being carried out before the tests of 19.11		N
19.2	Test of appliance with heating elements with restricted heat dissipation; test voltage (V): power input of 0,85 times rated power input :		N
19.3	Test of 19.2 repeated; test voltage (V): power input of 1,24 times rated power input :		N
19.4	Test conditions as in Cl. 11, the power input being 1,15 times rated power input, any control limiting the temperature during tests of Cl. 11 short-circuited		N
19.5	Test of 19.4 repeated on Class 0I and I appliances with tubular sheathed or embedded heating elements. No short-circuiting, but one end of the element connected to the elements sheath		N

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
	The test repeated with reversed polarity and the other end of the heating element connected to the sheath		N
	The test is not carried out on appliances intended to be permanently connected to fixed wiring and on appliances where an all-pole disconnection occurs during the test of 19.4		N
19.6	The working voltage of the PTC heating element is increased by 5% and the appliance is operated until steady conditions are re-established. The voltage is then increased in similar steps until 1,5 times working voltage is reached or until the PTC heating element ruptures		N
19.7	Stalling test by locking the rotor if the locked rotor torque is smaller than the full load torque or locking moving parts of other appliances		P
	Locked rotor, motor capacitors open-circuited or short-circuited, if required		P
	Locked rotor, capacitors open-circuited one at a time		N
	Test repeated with capacitors short-circuited one at a time, if required		N
	Appliances with timer or programmer supplied with rated voltage for each of the tests, for a period equal to the maximum period allowed		N
	Other appliances supplied with rated voltage for a period as specified		P
	Winding temperatures not exceeding values specified in table 8		P
19.8	Three-phase motors operated at rated voltage with one phase disconnected	No such three-phase motors	N
19.9	Running overload test on appliances incorporating motors intended to be remotely or automatically controlled or liable to be operated continuously		N
	Winding temperatures not exceeding values as specified		N
19.10	Series motor operated at 1,3 times rated voltage for 1 min	No such series motor	N
	Parts not ejected from the appliance during test		N
19.11	Electronic circuits, compliance checked by evaluation of the fault conditions specified in 19.11.2 for all circuits or parts of circuits, unless they comply with the conditions specified in 19.11.1		P
	Appliances incorporating a protective electronic circuit subjected to the tests of 19.11.3 and 19.11.4		N
	Appliances having a switch with an off position obtained by electronic disconnection, or a switch placing the appliance in a stand-by mode, subjected		N

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
	to the tests of 19.11.4		
	Appliances incorporating an electronic circuit that relies upon a programmable component to function correctly, subjected to the test of 19.11.4.8		N
19.11.1	Before applying the fault conditions a) to f) in 19.11.2, it is checked if circuits or parts of circuit meet both of the following conditions:		-
	- the electronic circuit is a low-power circuit, that is, the maximum power at low-power points does not exceed 15 W according to the tests specified		N
	- the protection against electric shock, fire hazard, mechanical hazard or dangerous malfunction in other parts of the appliance does not rely on the correct functioning of the electronic circuit		N
19.11.2	Fault conditions applied one at a time, the appliance operated under conditions specified in cl. 11, but supplied at rated voltage, the duration of the tests as specified:		-
	a) short circuit of functional insulation if clearances or creepage distances are less than the values specified in 29		P
	b) open circuit at the terminals of any component		P
	c) short circuit of capacitors, unless they comply with IEC 60384-14		P
	d) short circuit of any two terminals of an electronic component, other than integrated circuits. This fault condition is not applied between the two circuits of an optocoupler		P
	e) failure of triacs in the diode mode		P
	f) failure of an integrated circuit		P
	g) failure of an electronic power switching device		N
19.11.3	If the appliance incorporates a protective electronic circuit which operates to ensure compliance with clause 19, the relevant test is repeated with a single fault simulated, as indicated in a) to f) of 19.11.2		N
	During and after each test the following is checked:		N
	- the temperature rise of the windings do not exceed the values specified in table 8		N
	- the appliance complies with the conditions specified in 19.13		N
	- any current flowing through protective impedance not exceeding the limits specified in 8.1.4		N
	If a conductor of a printed board becomes open-circuited, the appliance is considered to have withstood the particular test, provided all three of the following conditions are met:		-
	- the material of the printed circuit board withstands the burning test of annex E		N

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
	- any loosened conductor does not reduce the clearances or creepage distances between live parts and accessible metal parts below the values specified in cl. 29		N
	- the appliance withstands the tests of 19.11.2 with open-circuited conductor bridged		N
19.11.4	Appliances having a device with an off position obtained by electronic disconnection, or		N
	a device that can be placed in the stand-by mode,		N
	subjected to the tests of 19.11.4.1 to 19.11.4.7		N
	Appliances incorporating a protective electronic circuit subjected to the tests of 19.11.4.1 to 19.11.4.7, except that		N
	appliances operated for 30 s or 5 min during the test of 19.7 are not subjected to the tests for electromagnetic phenomena.		N
19.11.4.1	The appliance is subjected to electrostatic discharges in accordance with IEC 61000-4-2, test level 4		N
19.11.4.2	The appliance is subjected to radiated fields in accordance with IEC 61000-4-3, test level 3		N
19.11.4.3	The appliance is subjected to fast transient bursts in accordance with IEC 61000-4-4, test level 3 or 4 as specified		N
19.11.4.4	The power supply terminals of the appliance subjected to voltage surges in accordance with IEC 61000-4-5, test level 3 or 4 as specified		N
	Earthed heating elements in class I appliances disconnected		N
19.11.4.5	The appliance is subjected to injected currents in accordance with IEC 61000-4-6, test level 3		N
19.11.4.6	The appliance is subjected to the Class 3 voltage dips and interruptions in accordance with IEC 61000-4-11		N
19.11.4.7	The appliance is subjected to mains signals in accordance with IEC 61000-4-13, test level class 2		N
19.11.4.8	The appliance is supplied at rated voltage and operated under normal operation. After 60s the power supply is reduces to a level such that the appliance ceases to respond or a programmable component cease to operate.		N
	The appliance continues to operate normally or requires a manual operation to restart		N
19.12	If the safety of the appliance for any of the fault conditions specified in 19.11.2 depends on the operation of a miniature fuse-link complying with IEC 127, the test is repeated, measuring the current flowing through the fuse-link; measured current (A);		N

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
	rated current of the fuse-link (A)		
19.13	During the tests the appliance does not emit flames, molten metal, poisonous or ignitable gas in hazardous amounts	Comply with requirement	P
	Temperature rises not exceeding the values shown in table 7		P
	Enclosures not deformed to such an extent that compliance with Cl. 8 is impaired		P
	Appliance still operable and complying with 20.2		N
	Appliance, other than Class III, withstands the electric strength test of 16.3, however, the test voltage being:		-
	- basic insulation: 1250 V		P
	- supplementary insulation: 1750 V		P
	- reinforced insulation: 3000 V		P
	After operation or interruption of a control, clearances and creepage distances across the functional insulation withstanding the electric strength test of 16.3. the test voltage being twice the working voltage		P
	The appliance does not undergo a dangerous malfunction, and		P
	no failure of protective electronic circuits, if the appliance is still operable		N
	Appliances tested with an electronic switch in the off position, or in the stand-by mode:		N
	- do not become operational, or		N
	- if they become operational, do not result in a dangerous malfunction during or after the tests of 19.11.4		N
19.14	Appliances operated under the conditions of Clause 11. Contactors or relays contacts operating under the conditions of clause 11 short-circuited		N

20	STABILITY AND MECHANICAL HAZARDS		-
20.1	Adequate stability		N
	Tilting test through an angle of 10° (appliance placed on an inclined plane/horizontal plane); appliance does not overturn		N
	Tilting test repeated on appliances with heating elements, angle of inclination increased to 15错误！未找到引用源。		N
	Possible heating test in overturned position; temperature rise does not exceed values shown in table 9		N

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
20.2	Moving parts adequately arranged or enclosed as to provide protection against personal injury		P
	Protective enclosures, guards and similar parts are non-detachable		P
	Adequate mechanical strength and fixing of protective enclosures		P
	Self-resetting thermal cut-outs and overcurrent protective devices not causing a hazard, if unexpectedly reclosed		N
	Not possible to touch dangerous moving parts with test finger		P

21	MECHANICAL STRENGTH		-
21.1	Appliance has adequate mechanical strength and is constructed as to withstand rough handling		P
	Checked by applying blows to the appliance in accordance with test probe of IEC 60068-2-75, spring hammer test, impact energy 0,5 J		P
	If necessary, supplementary or reinforced insulation subjected to the electric strength test of 16.3		N
	If necessary, repetition of groups of three blows on a new sample		N
21.2	Accessible parts of solid insulation having strength to prevent penetration by sharp implements		P
	The insulation is tested as specified, unless		N
	the thickness of supplementary insulation is at least 1 mm and reinforced insulation is at least 2 mm		P

22	CONSTRUCTION		-
22.1	Appliance marked with the first numeral of the IP system: relevant requirements of IEC 529 are fulfilled	IPX0	N
22.2	Stationary appliance: means to provide all-pole disconnection from the supply provided, the following means being available:		-
	- a supply cord fitted with a plug		N
	- a switch complying with 24.3		N
	- a statement in the instruction sheet that a disconnection incorporated in the fixed wiring is to be provided		N
	- an appliance coupler		N
	Single-phase Class I appliance with heating elements, intended to be permanently connected to fixed wiring, incorporating single-pole switches or		N

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
	single-pole protective devices for the disconnection of the heating element(s): the switches/devices being connected in the phase conductor		
22.3	Appliance provided with pins: no undue strain on socket-outlets		N
	Applied torque not exceeding 0,25 Nm		N
	Pull force of 50N to each pin after the appliance has been placed in the heating cabinet; when cooled to room temperature the pins are not displaced by more than 1mm		N
	Each pin subjected to a torque of 0.4Nm; the pins are not rotating unless rotating does not impair compliance with the standard		N
22.4	Appliance for heating liquids and appliance causing undue vibration not provided with pins for insertion into socket-outlets		N
22.5	No risk of electric shock when touching the pins of the plug		P
22.6	Electrical insulation not affected by condensing water or leaking liquid		P
	Electrical insulation of Class II appliances not affected in case of a hose rupture or seal leak		N
22.7	Appliances containing liquid or gases in normal use shall be against the risk of excessive pressure		P
22.8	Electrical connections not subject to pulling during cleaning of compartments to which access can be gained without the aid of a tool, and which are likely to be cleaned in normal use	No such compartments	N
22.9	Insulation, internal wiring, windings, commutators and slip rings not exposed to oil, grease or similar substances	Comply with requirements	P
	Adequate insulating properties of oil or grease to which insulation is exposed	No such parts	N
22.10	Not possible to reset voltage-maintained non-self-resetting thermal cut-outs by the operation of an automatic switching device incorporated within the appliance		N
	Non-self resetting thermal motor protectors have a trip-free action, unless		N
	they are voltage maintained		N
	Location or protection of reset buttons of non-self-resetting controls is so that accidental resetting is unlikely		N
22.11	Reliable fixing of non-detachable parts which provide the necessary degree of protection against electric shock, moisture or contact with moving parts		P

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
	Obvious locked position of snap-in devices used for fixing such parts		P
	No deterioration of the fixing properties of snap-in devices used in parts which are likely to be removed during installation or servicing		N
	Tests		N
22.12	Handles, knobs etc. fixed in a reliable manner		P
	Fixing in wrong position of handles, knobs etc. indicating position of switches or similar components not possible		P
	Axial force 15 N applied to parts, the shape of which being so that an axial pull is unlikely to be applied		P
	Axial force 30 N applied to parts, the shape of which being so that an axial pull is likely to be applied		N
22.13	Unlikely that handles, when gripped as in normal use, make the operators hand touch parts having a temperature rise exceeding the value specified for handles which are held for short periods only		P
22.14	No ragged or sharp edges creating a hazard for the user in normal use, or during user maintenance		P
	No exposed pointed ends of self tapping screws etc., liable to be touched by the user in normal use or during user maintenance		P
22.15	Storage hooks and the like for flexible cords smooth and well rounded	No such device	N
22.16	Automatic cord reels cause no undue abrasion or damage to the sheath of the flexible cord, no breakage of conductors strands, no undue wear of contacts	No such devices	N
	Cord reel tested with 6000 operations, as specified		N
	Electric strength test of 16.3, voltage of 1000 V applied		N
22.17	Spacers not removable from the outside by hand or by means of a screwdriver or a spanner	No such construction	N
22.18	Current-carrying parts and other metal parts resistant to corrosion under normal conditions of use		P
22.19	Driving belts not used as electrical insulation		N
22.20	Direct contact between live parts and thermal insulation effectively prevented, unless material used is non-corrosive, non-hygroscopic and non-combustible	No thermal insulation	N
22.21	Wood, cotton, silk, ordinary paper and fibrous or hygroscopic material not used as insulation, unless impregnated		N

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
	This requirement does not apply to magnesium oxide and mineral ceramic fibres used for the electrical insulation of heating elements		P
22.22	Asbestos not used in the construction of the appliance	No asbestos	P
22.23	Oils containing polychlorinated biphenyl (PCB) not used	No oils	P
22.24	Bare heating elements adequately supported		N
	In case of rupture, the heating conductor is unlikely to come in contact with earthed metal parts or accessible metal parts		N
22.25	Sagging heating conductors cannot come into contact with accessible metal parts	No such parts	N
22.26	The insulation between parts operating at safety extra-low voltage and other live parts complies with the requirements for double or reinforced insulation		N
22.27	Parts connected by protective impedance separated by double or reinforced insulation	No such protective impedance	N
22.28	Metal parts of Class II appliances conductively connected to gas pipes or in contact with water: separated from live parts by double or reinforced insulation	No such construction	N
22.29	Class II appliances permanently connected to fixed wiring so constructed that the required degree of protection against electric shock is maintained after installation		P
22.30	Parts serving as supplementary or reinforced insulation fixed so that they cannot be removed without being seriously damaged, or		P
	so constructed that they cannot be replaced in an incorrect position, and so that if they are omitted, the appliance is rendered inoperable or manifestly incomplete		P
22.31	Creepage distances and clearances over supplementary and reinforced insulation not reduced below values specified in 29.1 as a result of wear		P
	Creepage distances and clearances over supplementary or reinforced insulation not reduced to less than 50% of values specified in 29.1 if wires, screws etc. becomes loose		P
22.32	Supplementary and reinforced insulation designed or protected against deposition of dirt or dust		P
	Ceramic material not tightly sintered, similar material or beads alone not used as supplementary or reinforced insulation		N
	Supplementary insulation of natural or synthetic rubber resistant to ageing, or arranged and	No such device	N

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
	dimensioned so that creepage distances are not reduced below values specified in 29.1		
	Oxygen bomb test at 70 °C for 96 h and 16 h at room temperature		N
22.33	Conductive liquids which are or may become accessible in normal use are not in direct contact with live parts	No such conductive liquids	P
	Electrodes not used for heating liquids		P
	Conductive liquids are not in direct contact with basic insulation or reinforced insulation in Class II constructions		P
	Conductive liquids in direct contact with live parts shall not be in contact with reinforced insulation for Class II constructions		N
22.34	Shafts of operating knobs, handles, levers etc. not live, unless the shaft is not accessible when the part is removed		P
22.35	Handles, levers and knobs, held or actuated in normal use, not becoming live in the event of an insulation fault		N
	Such parts being of metal, and their shafts or fixings are likely to become live in the event of an insulation fault, they are either adequately covered by insulation material, or their accessible parts are separated from their shafts or fixings by supplementary insulation		N
	This requirement does not apply to handles, levers and knobs on stationary appliances other than those of electrical components, provided they are either reliably connected to an earthing terminal or earthing contact, or separated from live parts by earthed metal		N
22.36	Handles continuously held in the hand in normal use are so constructed that when gripped as in normal use, the operators hand is not likely to touch metal parts, unless they are separated from live parts by double or reinforced insulation	hand-held appliance	P
22.37	Capacitors in Class II appliances not connected to accessible metal parts, unless complying with 22.42	No such capacitors	N
	Metal casings of capacitors in Class II appliances separated from accessible metal parts by supplementary insulation, unless complying with 22.42		N
22.38	Capacitors not connected between the contacts of a thermal cut-out		N
22.39	Lamp holders used only for the connection of lamps		N
22.40	Motor-operated appliances and combined appliances intended to be moved while in operation, or having accessible moving parts, fitted with a switch to control the motor. The actuating member of the switch being		P

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
	easily visible and accessible		
	Unless the appliance can operate continuously, automatically or remotely without giving rise to a hazard, appliances for remote operation being fitted with a switch. The actuating member of the switch being easily visible and accessible.		P
22.41	No components, other than lamps, containing mercury		P
22.42	Protective impedance consisting of at least two separate components		N
	Values specified in 8.1.4 not exceeded if any one of the components are short-circuited or open-circuited		N
22.43	Appliances adjustable for different voltages, accidental changing of the setting of the voltage unlikely to occur		N
22.44	Appliances shall not have an enclosure that is shaped or decorated like a toy		P
22.45	When air is used as reinforced insulation, clearances not reduced below the values specified in 29.1.4 due to deformation as a result of an external force applied to the enclosure		N
22.46	Software used in protective electronic circuits is software class B or C :		N
22.47	Appliances connected to the water mains withstand the water pressure expected in normal use		N
	No leakage from any part, including any inlet water hose		N
22.48	Appliances connected to the water mains constructed to prevent backsiphonage of non-potable water		N
22.49	For remote operation, the duration of operation shall be set before the appliance can be started, unless		N
	the appliance switches off automatically or can operate continuously without hazard		N
22.50	Controls incorporated in the appliance take priority over controls actuated by remote operation		N
22.51	A control on the appliance being manually adjusted to the setting for remote operation before the appliance can be operated in this mode		N
	There is a visual indication showing that the appliance is adjusted for remote operation		N
	Manual setting and visual indication not necessary on appliances that can operate as follows, without giving rise to a hazard:		N
	- operate continuously,		N
	- operate automatically, or		N

EN 60335-1

Clause	Requirement Test	Result - Remark	Verdict
	- be operated remotely		N
22.52	Socket-outlets on appliances accessible to the user in accordance with the socket-outlet system used in the country in which the appliance is sold		N

23	INTERNAL WIRING		-
23.1	Wireways smooth and free from sharp edges		P
	Wires protected against contact with burrs, cooling fins etc.		P
	Wire holes in metal well rounded or provided with bushings		N
	Wiring effectively prevented from coming into contact with moving parts		N
23.2	Beads etc. on live wires cannot change their position, and are not resting on sharp edges or corners	No such materials	N
	Beads inside flexible metal conduits contained within an insulating sleeve		N
23.3	Electrical connections and internal conductors movable relatively to each other not exposed to undue stress		N
	Flexible metallic tubes not causing damage to insulation of conductors	No flexible metallic tubes	N
	Open-coil springs not used		N
	Adequate insulating lining provided inside a coiled spring, the turns of which touch one another		N
	No damage after 10 000 flexings		N
	Electric strength test, 1000 V between live parts and metal parts		N
23.4	Bare internal wiring sufficiently rigid and fixed	No such bare internal wire	N
23.5	The basic insulation of internal wiring withstanding the electrical stress likely to occur in normal use		P
	No breakdown when a voltage of 2000 V is applied for 15 min between the conductor and metal foil wrapped around the insulation		P
23.6	Sleeving used as supplementary insulation on internal wiring retained in position by positive means		N
23.7	Only the colour combination green/yellow used for earthing conductors		P
23.8	Aluminium wires not used for internal wiring		P
23.9	No lead-tin soldering of stranded conductors where they are subject to contact pressure, unless		P

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
	clamping means so constructed that there is no risk of bad contact due to cold flow of the solder		N
23.10	The insulation and sheath of internal wiring, incorporated in external hoses for the connection of an appliance to the water mains, at least equivalent to that of light polyvinyl chloride sheathed flexible cord (60227 IEC 52)		N

24	COMPONENTS		-
24.1	Components comply with safety requirements in relevant IEC standards		P
	List of components	(see appended table)	P
	Components not tested and found to comply with relevant IEC standard for the number of cycles specified are tested in accordance with 24.1.1 to 24.1.9		N
	Components not tested and found to comply with relevant IEC standard, components not marked or not used in accordance with its marking, tested under the conditions occurring in the appliance		P
	Lampholders and starterholders not being tested and found to comply with the relevant IEC standard, tested as a part of the appliance and additionally according to the gauging and interchangeability requirements of the relevant IEC standard		N
24.1.1	Capacitors likely to be permanently subjected to the supply voltage and used for radio interference suppression or for voltage dividing, complying with IEC 60384-14, or		N
	tested according to annex F		N
24.1.2	Safety isolating transformers complying with IEC 61558-2-6, or		N
	tested according to annex G		N
24.1.3	Switches complying with IEC 61058-1, the number of cycles of operation being at least 10 000, or		P
	tested according to annex H		N
	If the switch operates a relay or contactor, the complete switching system is subjected to the test		N
24.1.4	Automatic controls complying with IEC 60730-1 with relevant part 2. The number of cycles of operation being:		-
	- thermostats:		N
	- temperature limiters:		N
	- self-resetting thermal cut-outs:		N

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
	- voltage maintained non-self-resetting thermal cut-outs:		N
	- other non-self-resetting thermal cut-outs:		N
	- timers:		N
	- energy regulators:		N
	Thermal motor protectors are tested in combination with their motor under the conditions specified in Annex D		N
	For water valves containing live parts and that are incorporated in external hoses for connection of an appliance to the water mains, the degree of protection declared for subclause 6.5.2 of IEC 60730-2-8 is IPX7		N
24.1.5	Appliance couplers complying with IEC 60320-1		N
	However, appliances classified higher than IPX0, the appliance couplers complying with IEC 60320-2-3		N
	Interconnection couplers complying with IEC 60320-2-2		N
24.1.6	Small lamp holders similar to E10 lampholders complying with IEC 60238, the requirements for E10 lampholders being applicable		N
24.1.7	If the remote operation of the appliance is via a telecommunication network, the relevant standard for the telecommunication interface circuitry in the appliance is IEC 62151		N
24.1.8	The relevant standard for thermal links is IEC 60691. Thermal links not complying with IEC 60691 are considered to be an intentionally weak part for the purposes of Clause 19		P
24.1.9	Relays, other than motor starting relays, tested as part of the appliance		P
	They are also tested in accordance with Clause 17 of IEC 60730-1, the number of operations in 24.1.4 selected according to the relay function in the appliance:		N
24.2	No switches or automatic controls in flexible cords		N
	No devices causing the protective device in the fixed wiring to operate in the event of a fault in the appliance		P
	No thermal cut-outs which can be reset by soldering		N
24.3	Switches intended for all-pole disconnection of stationary appliances are directly connected to the supply terminals and having a contact separation in all poles, providing full disconnection under overvoltage category III conditions		N

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
24.4	Plugs and socket-outlets for extra-low voltage circuits and heating elements, not interchangeable with plugs and socket-outlets listed in IEC 60083 or IEC 60906-1 or with connectors and appliance inlets complying with the standard sheets of IEC 60320-1		N
24.5	Capacitors in auxiliary windings of motors marked with their rated voltage and capacitance and used accordingly		N
	Voltage across capacitors in series with a motor winding does not exceed 1,1 times rated voltage, when the appliance is supplied at 1,1 times rated voltage under minimum load		N
24.6	Working voltage of motors connected to the supply mains and having basic insulation that is inadequate for the rated voltage of the appliance, not exceeding 42V		N
	In addition, the motors are complying with the requirements of Annex I		N
24.7	Hose-sets for connection of appliances to the water mains, complying with IEC 61770 and supplied with the appliance		N

25	SUPPLY CONNECTION AND EXTERNAL FLEXIBLE CORDS		-
25.1	Appliance not intended for permanent connection to fixed wiring, means for connection to the supply:		P
	- supply cord fitted with a plug		N
	- an appliance inlet having at least the same degree of protection against moisture as required for the appliance		N
	- pins for insertion into socket-outlets		P
25.2	Appliance not provided with more than one means of connection to the supply mains		N
	Stationary appliance for multiple supply may be provided with more than one means of connection, provided electric strength test of 1250 V for 1 min between each means of connection causes no breakdown		N
25.3	Connection of supply conductors for appliance intended to be permanently connected to fixed wiring possible after the appliance has been fixed to its support		N
	Appliance provided with a set of terminals for the connection of cables or fixed wiring, cross-sectional areas specified in 26.6		N
	Appliance provided with a set of terminals allowing the connection of a flexible cord		N

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
	Appliance provided with a set of supply leads accommodated in a suitable compartment		N
	Appliance provided with a set of terminals and cable entries, conduit entries, knock-outs or glands, allowing connection of appropriate type of cable or conduit		N
25.4	Cable and conduit entries, rated current of appliance not exceeding 16 A, dimension according to table 10		N
	Introduction of conduit or cable does not reduce clearances or creepage distances below values specified in 29		N
25.5	Method for assemble supply cord with the appliance:		-
	- type X attachment		N
	- type Y attachment		N
	- type Z attachment, if allowed in part 2		N
	Type X attachment, other than those with a specially prepared cord, not used for flat twin tinsel cords		N
25.6	Plugs fitted with only one flexible cord		N
25.7	Supply cords being one of the following types:		-
	- rubber sheathed (at least 60245 IEC 53)		N
	- polychloroprene sheathed (at least 60245 IEC 57)		N
	- cross-linked polyvinyl chloride sheathed (at least 60245 IEC 87)		N
	Polyvinyl chloride sheathed: Not used if they are likely to touch metal parts having a temperature rise exceeding 75K during the test of Clause 11.		N
	- light polyvinyl chloride sheathed cord (at least 60227 IEC 52), appliances not exceeding 3 kg		N
	- ordinary polyvinyl chloride sheathed cord (at least 60227 IEC 53), other appliances		N
	Heat resistant polyvinyl chloride sheathed: Not used for type X attachment other than specially prepared cords.		N
	- Heat-resistant light polyvinyl chloride sheathed cord (at least 60227 IEC 56), appliances not exceeding 3 kg		N
	- heat-resistant polyvinyl chloride sheathed cord (60227 IEC 57), other appliances		N
25.8	Nominal cross-sectional area of supply cords according to table 11; rated current (A); cross-sectional area (mm ²) :		N
25.9	Supply cord not in contact with sharp points or edges		N

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
25.10	Green/yellow core for earthing purposes in Class I appliance		N
25.11	Conductors of supply cords not consolidated by lead-tin soldering where they are subject to contact pressure, unless		N
	clamping means so constructed that there is no risk of bad contacts due to cold flow of the solder		N
25.12	Moulding the cord to part of the enclosure does not damage the insulation of the supply cord		N
25.13	Inlet opening so shaped as to prevent damage to the supply cord		N
	Unless the enclosure at the inlet opening is of insulation material, a non-detachable lining or bushing complying with 29.3 for supplementary insulation provided		N
	If unsheathed supply cord, a similar additional bushing or lining is required, unless		N
	the appliance is class 0		N
25.14	Supply cords adequately protected against excessive flexing		N
	Flexing test:		N
	- applied force (N)		N
	- number of flexings:		N
	The test does not result in:		N
	- short circuit between the conductors		N
	- breakage of more than 10% of the strands of any conductor		N
	- separation of the conductor from its terminal		N
	- loosening of any cord guard		N
	- damage, within the meaning of the standard, to the cord or the cord guard		N
	- broken strands piercing the insulation and becoming accessible		N
25.15	Conductors of the supply cord relieved from strain, twisting and abrasion by use of cord anchorage		N
	The cord cannot be pushed into the appliance to such an extent that the cord or internal parts of the appliance can be damaged		N
	Pull and torque test of supply cord, values shown in table 10: pull (N); torque (not on automatic cord reel) (Nm):		N
	Max. 2 mm displacement of the cord, and conductors		N

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
	not moved more than 1 mm in the terminals		
	Creepage distances and clearances not reduced below values specified in 29.1		N
25.16	Cord anchorages for type X attachments constructed and located so that:		N
	- replacement of the cord is easily possible		N
	- it is clear how the relief from strain and the prevention of twisting are obtained		N
	- they are suitable for different types of cord		N
	- cord cannot touch the clamping screws of cord anchorage if these screws are accessible, unless separated from accessible metal parts by supplementary insulation		N
	- the cord is not clamped by a metal screw which bears directly on the cord		N
	- at least one part of the cord anchorage securely fixed to the appliance, unless part of a specially prepared cord		N
	- screws which have to be operated when replacing the cord do not fix any other component, if applicable		N
	- if labyrinths can be bypassed the test of 25.15 is nevertheless withstood		N
	- for Class 0, 0I and I appliances: they are of insulating material or are provided with an insulating lining, unless a failure of the insulation of the cord does not make accessible metal parts live		N
	- for Class II appliances: they are of insulating material, or if of metal, they are insulated from accessible metal parts by supplementary insulation		N
25.17	Adequate cord anchorages for type Y and Z attachment		N
25.18	Cord anchorages only accessible with the aid of a tool, or		N
	so constructed that the cord can only be fitted with the aid of a tool		N
25.19	Type X attachment, glands not used as cord anchorage in portable appliances		N
	Tying the cord into a knot or tying the cord with string not used		N
25.20	Conductors of the supply cord for type Y and Z attachment adequately additionally insulated		N
25.21	Space for supply cord for type X attachment or for connection of fixed wiring constructed to permit checking of conductors with respect to correct positioning and connection before fitting any cover, no risk of damage to the conductors when fitting the		N

EN 60335-1

Clause	Requirement Test	Result - Remark	Verdict
	cover, no contact with accessible metal parts if a conductor becomes loose, etc.		
	For portable appliances, the uninsulated end of a conductor prevented from any contact with accessible metal parts, unless the end of the cord is such that the conductors are unlikely to slip free		N
25.22	Appliance inlet:		-
	- live parts not accessible during insertion or removal		N
	- connector can be inserted without difficulty		N
	- the appliance is not supported by the connector		N
	- is not for cold conditions if temp. rise of external metal parts exceeds 75 K, unless the supply cord is not likely to touch such metal parts		N
25.23	Interconnection cords comply with the requirements for the supply cord, except as specified		N
	If necessary, electric strength test of 16.3		N
25.24	Interconnection cords not detachable without the aid of a tool if compliance with the standard is impaired when they are disconnected		N
25.25	Dimensions of pins compatible with the dimensions of the relevant socket-outlet. Dimensions of pins and engagement face in accordance with the relevant plug in IEC 60083		N

26	TERMINALS FOR EXTERNAL CONDUCTORS		-
26.1	Appliances provided with terminals or equally effective devices for connection of external conductors		P
	Terminals only accessible after removal of a non-detachable cover		P
	However, earthing terminals may be accessible if a tool is required to make the connections and means are provided to clamp the wire independently from its connection		N
26.2	Appliances with type X attachment and appliances for connection to fixed wiring provided with terminals in which connections are made by means of screws, nuts or similar devices, unless the connections are soldered		P
	Screws and nuts serve only to clamp supply conductors, except		N
	internal conductors, if so arranged that they are unlikely to be displaced when fitting the supply conductors		N

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
	If soldered connections used, the conductor so positioned or fixed that reliance is not placed on soldering alone		N
	Soldering alone used, barriers provided, clearances and creepage distances satisfactory if the conductor becomes free at the soldered joint		N
26.3	Terminals for type X attachment and for connection to fixed wiring so constructed that the conductor is clamped between metal surfaces with sufficient contact pressure and without damaging the conductor		N
	Terminals for type X attachment and those for connection to fixed wiring so fixed that when tightening or loosening the clamping means:		N
	- the terminal does not loosen		N
	- internal wiring is not subjected to stress		N
	- clearances and creepage distances are not reduced below the values in 29		N
	Compliance checked by inspection and by the test of subclause 9.6 of IEC 60999-1, the torque applied being equal to two-thirds of the torque specified. Nominal diameter of thread (mm); screw category; torque (Nm) :		N
26.4	Terminals for type X attachment, except those with a specially prepared cord, and those for connection to fixed wiring, no special preparation of conductors required, and so constructed or placed that conductors prevented from slipping out		N
26.5	Terminals for type X attachment so located or shielded that if a wire of a stranded conductor escapes, no risk of accidental connection to other parts that result in a hazard		N
	Stranded conductor test, 8 mm insulation removed		N
	No contact between live parts and accessible metal parts and, for class II constructions, between live parts and metal parts separated from accessible metal parts by supplementary insulation only		N
26.6	Terminals for type X attachment and for connection to fixed wiring suitable for connection of conductors with required cross-sectional area according to table 13; rated current (A); nominal cross-sectional area (mm ²) :		N
	Terminals only suitable for a specially prepared cord		N
26.7	Terminals for type X attachment accessible after removal of a cover or part of the enclosure		N
26.8	Terminals for the connection to fixed wiring, including the earthing terminal, located close to each other		N
26.9	Terminals of the pillar type constructed and located		N

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict

	as specified		
26.10	Terminals with screw clamping and screwless terminals not used for flat twin tinsel cords, unless conductors ends fitted with a device suitable for screw terminals		N
	Pull test of 5 N to the connection		N
26.11	For type Y and Z attachment: soldered, welded, crimped and similar connections may be used		P
	For Class II appliances: the conductor so positioned or fixed that reliance is not placed on soldering, welding or crimping alone		N
	For Class II appliances: soldering, welding or crimping alone used, barriers provided, clearances and creepage distances satisfactory if the conductor becomes free		P

27	PROVISION FOR EARTHING		P
27.1	Accessible metal parts of Class 0I and I appliances, permanently and reliably connected to an earthing terminal or contact of the appliance inlet		N
	Earthing terminals not connected to neutral terminal		N
	Class 0, II and III appliance have no provision for earthing	Class III appliance	P
	Safety extra-low voltage circuits not earthed, unless protective extra-low voltage circuits		N
27.2	Clamping means adequately secured against accidental loosening		N
	Terminals used for the connection of external equipotential bonding conductors allow connection of conductors of 2.5 to 6 mm ² , and		N
	do not provide earthing continuity between different parts of the appliance		N
	Conductors cannot be loosened without the aid of a tool		N
27.3	For detachable parts that are plugged into another part of the appliance, and having an earth connection, the earth connection made before and separated after current-carrying connections when removing the part		N
	For appliances with supply cord, current-carrying conductors become taut before earthing conductor, if the cord slips out of the cord anchorage		N
27.4	No risk of corrosion resulting from contact between metal of earthing terminal and other metal		N

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
	Adequate resistance to corrosion of coated or uncoated parts providing earthing continuity, other than parts of a metal frame or enclosure		N
	Parts of steel providing earthing continuity provided at the essential areas with an electroplated coating, thickness at least 5 μm		N
	Adequate protection against rusting of parts of coated or uncoated steel, only intended to provide or transmit contact pressure		N
	In case of aluminium alloys precautions taken to avoid risk of corrosion		N
27.5	Low resistance of connection between earthing terminal and earthed metal parts		N
	This requirement does not apply to connections providing earthing continuity in the protective extra-low voltage circuit, provided that clearances of basic insulation are based on the rated voltage of the appliance		N
	Resistance not exceeding 0,1 Ω at the specified low-resistance test		N
27.6	The printed conductors of printed circuit boards shall not be used to provide earthing continuity in hand-held appliances.		N
	They may be used to provide earthing continuity in other appliances if at least two tracks are used with independent soldering points and the appliance complies with 27.5 for each circuit		N

28	SCREWS AND CONNECTIONS		-
28.1	Fixings, electrical connections and connections providing earthing continuity withstand mechanical stresses		P
	Screws not of soft metal liable to creep, such as zinc or aluminium	No such screws	P
	Diameter of screws of insulating material min. 3 mm		N
	Screws of insulating material not used for any electrical connection or connections providing earthing continuity		N
	Screws used for electrical connections or connections providing earthing continuity screw into metal		N
	Screws not of insulating material if their replacement by a metal screw can impair supplementary or reinforced insulation		N
	Type X attachment, screws to be removed for replacement of supply cord or for user maintenance, not of insulating material if their replacement by a		N

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
	metal screw can impair basic insulation		
	For screws and nuts; test as specified		P
28.2	Electrical connections and connections providing earthing continuity constructed so that contact pressure not transmitted through insulating material liable to shrink or distort, unless shrinkage or distortion compensated		P
	This requirement does not apply to electrical connections in circuits carrying a current not exceeding 0.5A		N
28.3	Space-threaded (sheet metal) screws only used for electrical connections if they clamp the parts together		N
	Thread-cutting (self-tapping) screws and thread rolling screws only used for electrical connections if they generate a full form standard machine screw thread		N
	Thread-cutting (self-tapping) screws not used if they are likely to be operated by the user or installer		N
	Thread-cutting, thread rolling and space threaded screws may be used in connections providing earthing continuity provided it is not necessary to disturb the connection:		N
	- in normal use,		N
	- during user maintenance,		N
	- when replacing a supply cord having a type X attachment, or		N
	- during installation		N
	At least two screws being used for each connection providing earthing continuity, unless		N
	the screw forms a thread having a length of at least half the diameter of the screw		N
	Thread-cutting and space-threaded screws may be used in connections providing earthing continuity, provided unnecessary to disturb the connection and at least two screws are used for each connection		N
28.4	Screws and nuts that make mechanical connection secured against loosening if they also make electrical connections or connections providing earthing continuity		N
	Rivets for electrical connections or connections providing earthing continuity secured against loosening if subjected to torsion		N

29	CLEARANCES, CREEPAGE DISTANCES AND SOLID INSULATION		-
	Clearances, creepage distances and solid insulation withstand electrical stress		P

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
	For coatings used on printed circuits boards to protect the microenvironment (Type 1) or to provide basic insulation (Type 2), annex J applies:		N
	The microenvironment is pollution degree 1 under Type 1 coating		N
	No clearance or creepage distance requirements under Type 2 coating		N
29.1	Clearances not less than the values specified in table 16, taking into account the rated impulse voltage for the overvoltage categories of table 15, unless	(see appended table)	P
	for basic insulation and functional insulation they comply with the impulse voltage test of clause 14		N
	However, if the construction is affected by wear, distortion, movement of the parts or during assembly, the clearances for rated impulse voltages of 1500V and above are increased by 0,5 mm and the impulse voltage test is not applicable		N
	Impulse voltage test not applicable:		-
	- when the microenvironment is pollution degree 3		N
	- for basic insulation of class 0 and class 0I appliances		N
	Appliances are in overvoltage category II		P
	Clearances less than specified in table 16 not allowed for basic insulation of class 0 and class 0I appliances,		N
	or if pollution degree 3 is applicable		N
	Compliance is checked by inspection and measurements as specified		N
29.1.1	Clearances of basic insulation withstand the overvoltages, taking into account the rated impulse voltage		N
	Clearance at the terminals of tubular sheathed heating elements may be reduced to 1mm if the microenvironment is pollution degree 1		N
	Lacquered conductors of windings considered to be bare conductors		N
29.1.2	Clearances of supplementary insulation not less than those specified for basic insulation in table 16	(see appended table)	N
29.1.3	Clearances of reinforced insulation not less than those specified for basic insulation in table 16, but using the next higher step for rated impulse voltage		N
29.1.4	For functional insulation, the values of table 16 are applicable, unless	(see appended table)	P
	the appliance complies with clause 19 with the functional insulation short-circuited		N

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
	Lacquered conductors of windings considered to be bare conductors		N
	However, clearances at crossover points are not measured		N
	Clearance between surfaces of PTC heating elements may be reduced to 1mm		N
29.1.5	Appliances having higher working voltage than rated voltage, the voltage used for determining clearances from table 16 is the sum of the rated impulse voltage and the difference between the peak value of the working voltage and the peak value of the rated voltage		N
	If the secondary winding of a step-down transformer is earthed, or if there is an earthed screen between the primary and secondary windings, clearances of basic insulation on the secondary side not less than those specified in table 16, but using the next lower step for rated impulse voltage		N
	Circuits supplied with a voltage lower than rated voltage, clearances of functional insulation based on the working voltage used as the rated voltage in table 15		N
29.2	Creepage distances not less than those appropriate for the working voltage, taking into account the material group and the pollution degree		P
	Pollution degree 2 applies, unless		P
	precautions taken to protect the insulation; pollution degree 1		N
	insulation subjected to conductive pollution; pollution degree 3		N
29.2.1	Creepage distances of basic insulation not less than specified in table 17	(see appended table)	N
	For pollution degree 1, creepage distance not less than the minimum specified for the clearance in table 16, if the clearance has been checked according to the test of clause 14		N
29.2.2	Creepage distances of supplementary insulation at least as specified for basic insulation in table 17	(see appended table)	N
29.2.3	Creepage distances of reinforced insulation at least double as specified for basic insulation in table 17		N
29.2.4	Creepage distances of functional insulation not less than specified in table 18		P
	Creepage distances may be reduced if the appliance complies with clause 19 with the functional insulation short-circuited		N
29.3	Supplementary and reinforced insulation having adequate thickness, or a sufficient number of layers,		N

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
	to withstand the electrical stresses		
	Compliance checked by:		N
	- measurement, in accordance with 29.3.1, or		N
	- an electric strength test in accordance with 29.3.2, or		N
	- an assessment of the thermal quality of the material combined with an electric strength test, in accordance with 29.3.3		N
29.3.1	Supplementary insulation having a thickness of at least 1 mm		N
	Reinforced insulation having a thickness of at least 2 mm		N
29.3.2	Each layer of material withstand the electric strength test of 16.3 for supplementary insulation		N
	Supplementary insulation consisting of at least 2 layers		N
	Reinforced insulation consisting of at least 3 layers		N
29.3.3	The insulation is subjected to the dry heat test Bb of IEC 60068-2-2, followed by		N
	the electric strength test of 16.3		N
	If the temperature rise during the tests of Clause 19 does not exceed the value specified in Table 3, the test of IEC 60068-2-2 is not carried out		N

30	RESISTANCE TO HEAT AND FIRE		-
30.1	External parts of non-metallic material,		P
	parts supporting live parts, and		P
	thermoplastic material providing supplementary or reinforced insulation,		P
	sufficiently resistant to heat		P
	Ball-pressure test according to IEC 60695-10-2		P
	External parts: at 40 °C plus the maximum temperature rise determined during the test of clause 11, or at 75 °C, whichever is the higher; temperature (°C) :		P
	Parts supporting live parts: at 40°C plus the maximum temperature rise determined during the test of clause 11, or at 125°C, whichever is the higher; temperature (°C) :		P
	Parts of thermoplastic material providing supplementary or reinforced insulation, 25°C plus the		P

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
	maximum temperature rise determined during clause 19, if higher; temperature (°C) :		
30.2	Parts of non-metallic material adequately resistant to ignition and spread of fire		P
	This requirement does not apply to decorative trims, knobs and other parts unlikely to be ignited or to propagate flames that originate inside the appliance		P
	Compliance checked by the test of 30.2.1. In addition:		P
	- attended appliances, 30.2.2 applies		P
	- unattended appliances, 30.2.3 applies		N
	Appliances for remote operation, 30.2.3 applies		N
	Base material of printed circuit board, 30.2.4 applies		N
	For other appliances, 30.2.2 applies		P
30.2.1	Glow-wire test of IEC 60695-2-11 at 550 °C, unless	No flame	P
	the material is classified at least HB40 according to IEC 60695-11-10		N
	Parts for which the glow-wire test cannot be carried out meet the requirements in ISO9772 for category HBF material		N
30.2.2	Appliances operated while attended, parts of non-metallic material supporting current-carrying connections, and parts of non-metallic material within a distance of 3mm of such connections, are subjected to the glow-wire test of IEC 60695-2-11.		P
	The glow-wire test is not carried out on parts of material classified as having a glow-wire flammability index according to IEC 60695-2-12 of at least:		-
	-750°C, for connections carrying a current exceeding 0,5A during normal operation		N
	-650°C, for other connections		N
	Test as specified for an interposed shielding material		N
	When the glow-wire test of IEC 60695-2-11 is carried out, the temperatures are:		-
	-750°C, for connections carrying a current exceeding 0,5A during normal operation		P
	-650°C, for other connections		N
	Test not applicable to conditions as specified		N
30.2.3	Appliances operated while unattended, tested as specified in 30.2.3.1 and 30.2.3.2		N
	Tests not applicable to conditions as specified		N
30.2.3.1	Parts of insulating material supporting connections carrying a current exceeding 0.2A during normal		N

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
	operation, and		
	parts of non-metallic material within a distance of 3mm,		N
	subjected to the glow-wire test of IEC 60695-2-11 with a test severity of 850°C		N
	Glow-wire test not carried out on parts of material classified as having a glow-wire flammability index of at least 850°C according to IEC 60695-2-12		N
	Glow-wire test not carried out on small parts that comply with the needle-flame test of Annex E or on small parts of material classified as V-0 or V-1 according to IEC 60695-11-10		N
	Test as specified for an interposed shielding material		N
30.2.3.2	Parts of non-metallic material supporting current-carrying connections, and		P
	parts of non-metallic material within a distance of 3mm,		P
	subjected to glow-wire test of IEC 60695-2-11		P
	Test not carried out on material having a glow-wire ignition temperature according to IEC 60695-2-13 of at least:		N
	-775°C, for connections carrying a current exceeding 0,2A during normal operation		N
	-675°C, for other connections		N
	When the glow-wire test of IEC 60695-2-11 is carried out, the temperatures are:		N
	-750°C, for connections carrying a current exceeding 0,2A during normal operation		P
	-650°C, for other connections		N
	Parts that during the test produce a flame persisting longer than 2 s, tested as specified		N
	If a flame persists longer than 2 s during the test, parts above the connection, as specified, subjected to the needle-flame test of annex E, unless		N
	the material is classified as V-0 or V-1 according to IEC 60695-11-10		N
30.2.4	Base material of printed circuit boards subjected to needle-flame test of annex E		N
	Test not applicable to conditions as specified		N

31	RESISTANCE TO RUSTING		-
	Relevant ferrous parts adequately protected against		P

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict

	rusting		
--	---------	--	--

32	RADIATION, TOXICITY AND SIMILAR HAZARDS		-
	Appliance shall not emit harmful radiation, present a toxic or similar hazard due to their operation in normal use		P
	Relevant tests specified in part 2, if necessary		P

A	ANNEX A (INFORMATIVE) ROUTINE TESTS		-
	Description of routine tests to be carried out by the manufacturer		P

B	ANNEX B (NORMATIVE) APPLIANCES POWERED BY RECHARGEABLE BATTERIES		-
	The following modifications to this standard are applicable for appliances powered by batteries that are recharged in the appliance		N
	This annex does not apply to battery chargers		N
3.1.9	Appliance operated under the following conditions:		-
	-the appliance, supplied by its fully charged battery, operated as specified in relevant part 2		N
	-the battery is charged, the battery being initially discharged to such an extent that the appliance cannot operate		N
	-if possible, the appliance is supplied from the supply mains through its battery charger, the battery being initially discharged to such an extent that the appliance cannot operate. The appliance is operated as specified in relevant part 2		N
	If the appliance incorporates inductive coupling between two parts that are detachable from each other, the appliance is supplied from the supply mains with the detachable part removed		N
3.6.2	Part to be removed in order to discard the battery is not considered to be detachable		N
5.101	Appliances supplied from the supply mains tested as specified for motor-operated appliances		N
7.1	Battery compartment for batteries intended to be replaced by the user, marked with battery voltage and polarity of the terminals		N
7.12	The instructions for appliances incorporating batteries intended to be replaced by the user includes required		N

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
	information		
	Details about how to remove batteries containing materials hazardous to the environment given		N
7.15	Markings placed on the part of the appliance connected to the supply mains		N
8.2	Appliances having batteries that according to the instruction may be replaced by the user need only have basic insulation between live parts and the inner surface of the battery compartment		N
	If the appliance can be operated without batteries, double or reinforced insulation required		N
11.7	The battery is charged for the period described		N
19.1	Appliances subjected to tests of 19.101, 19.102 and 19.103		N
19.101	Appliances supplied at rated voltage for 168 h, the battery being continually charged		N
19.102	Short-circuiting of the terminals of the battery, being fully charged, for appliances having batteries that can be removed without the aid of a tool		N
19.103	Appliances having batteries replaceable by the user supplied at rated voltage under normal operation with the battery removed or in any position allowed by the construction		N
21.101	Appliances having pins for insertion into socket-outlets have adequate mechanical strength, checked according to procedure 2 of IEC 68-2-32		N
	Part of the appliance incorporating the pins subjected to the free fall test, procedure 2, of IEC 60068-2-32, the number of falls being:		N
	- 100, the mass of part does not exceed 250 g		N
	- 50, the mass of part exceeds 250 g		N
	After the test, the requirements of 8.1, 15.1.1, 16.3 and clause 29 are met		N
22.3	Appliances having pins for insertion into socket-outlets tested as fully assembled as possible		N
25.13	An additional lining or bushing not required for interconnection cords operating at safety extra-low voltage		N
30.2	For parts of the appliance connected to the supply mains during the charging period, 30.2.3 applies		N
	For other parts, 30.2.2 applies		N
C	ANNEX C (NORMATIVE) AGEING TEST ON MOTORS		-

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
	Tests, as described, carried out when doubt with regard to the temperature classification of the insulation of a motor winding		N
	The value of p in Table C.1 is 2000 (IEC 60335-2-15)		N

D	ANNEX D (NORMATIVE) THERMAL MOTOR PROTECTORS		-
	Applicable to appliances having motors that incorporate thermal motor protectors		N

E	ANNEX E (NORMATIVE) NEEDLE-FLAME TEST		-
	Needle-flame test carried out in accordance with IEC 60695- 11-5, with the following modifications:		P
7	Severities		P
	The duration of application of the test flame is 30 s ± 1 s		P
9	Test procedure		P
9.1	The specimen so arranged that the flame can be applied to a vertical or horizontal edge as shown in the examples of figure 1		P
9.2	The first paragraph does not apply		P
	If possible, the flame is applied at least 10 mm from a corner		P
9.3	The test is carried out on one specimen		P
	If the specimen does not withstand the test, the test may be repeated on two additional specimens, both withstanding the test		N
11	Evaluation of test results		P
	The duration of burning not exceeding 30 s		N
	However, for printed circuit boards, the duration of burning not exceeding 15 s		P

F	ANNEX F (NORMATIVE) CAPACITORS		-
	Capacitors likely to be permanently subjected to the supply voltage, and used for radio interference suppression or voltage dividing, comply with the following clauses of IEC 60384-14, with the following modifications:		N
1.5	Terminology		N

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
1.5.3	Class X capacitors tested according to subclass X2		N
1.5.4	This subclause is applicable		N
1.6	Marking		N
	Items a) and b) are applicable		N
3.4	Approval testing		N
3.4.3.2	Table II is applicable as described		N
4.1	Visual examination and check of dimensions		N
	This subclause is applicable		N
4.2	Electrical tests		N
4.2.1	This subclause is applicable		N
4.2.5	This subclause is applicable		N
4.2.5.2	Only table IX is applicable		N
	Values for test A apply		N
	However, for capacitors in heating appliances the values for test B or C apply		N
4.12	Damp heat, steady state		N
	This subclause is applicable		N
	Only insulation resistance and voltage proof are checked		N
4.13	Impulse voltage		N
	This subclause is applicable		N
4.14	Endurance		N
	Subclauses 4.14.1, 4.14.3, 4.14.4 and 4.14.7 applicable		N
4.14.7	Only insulation resistance and voltage proof are checked		N
	Visual examination, no visible damage		N
4.17	Passive flammability test		N
	This subclause is applicable		N
4.18	Active flammability test		N
	This subclause is applicable		N

G	ANNEX G (NORMATIVE) SAFETY ISOLATING TRANSFORMERS	-
	The following modifications to this standard are	N

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
	applicable for safety isolating transformers:		
7	Marking and instructions		N
7.1	Transformers for specific use marked with:		N
	-name, trademark or identification mark of the manufacturer or responsible vendor		N
	-model or type reference		N
17	Overload protection of transformers and associated circuits		N
	Fail-safe transformers comply with subclause 15.5 of IEC 61558-1		N
22	Construction		N
	Subclauses 19.1 and 19.1.2 of IEC 61558-2-6 are applicable		N
29	Clearances, creepage distances and solid insulation		N
29.1, 29.2 and 29.3	The distances specified in items 2a, 2c and 3 in table 13 of IEC 61558-1 apply		N

H	ANNEX H (NORMATIVE) SWITCHES		-
	Switches comply with the following clauses of IEC 61058-1, as modified:		N
	-The tests of IEC 61058-1 carried out under the conditions occurring in the appliance		N
	-Before being tested, switches are operated 20 times without load		N
8	Marking and documentation		N
	Switches are not required to be marked		N
	However, switches that can be tested separately from the appliance marked with the manufacturer's name or trade mark and the type reference		N
13	Mechanism		N
	The tests may be carried out on a separate sample		N
15	Insulation resistance and dielectric strength		N
15.1	Not applicable		N
15.2	Not applicable		N
15.3	Applicable for full disconnection and micro-disconnection		N
17	Endurance		N
	Compliance is checked on three separate appliances or switches		N

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
	For 17.2.4.4, the number of cycles is 10 000, unless otherwise specified in 24.1.3 of the relevant part 2 of IEC 60335		N
	Switches for operation under no load and which can be operated only by a tool and switches operated by hand that are interlocked so that they cannot be operated under load, are not subjected to the tests		N
	Subclauses 17.2.2 and 17.2.5.2 not applicable		N
	The ambient temperature during the test is that occurring in the appliance during the test of Clause 11 in IEC 60335-1		N
	Temperature rise of the terminals not more than 30 K above the temperature rise measured in clause 11 of IEC 60335-1		N
20	Clearances, creepage distances, solid insulation and coatings of rigid printed board assemblies		N
	This clause is applicable to clearances and creepage distances for functional insulation, across full disconnection and micro-disconnection, as stated in table 24		N

I	ANNEX I (NORMATIVE) MOTORS HAVING BASIC INSULATION THAT IS INADEQUATE FOR THE RATED VOLTAGE OF THE APPLIANCE		-
	The following modifications to this standard are applicable for motors having basic insulation that is inadequate for the rated voltage of the appliance:		N
8	Protection against access to live parts		N
8.1	Metal parts of the motor are considered to be bare live parts		N
11	Heating		N
11.3	Temperature rise of the body of the motor is determined instead of the temperature rise of the windings		N
11.8	Temperature rise of the body of the motor, where in contact with insulating material, not exceeding values in table 3 for the relevant insulating material		N
16	Leakage current and electric strength		N
16.3	Insulation between live parts of the motor and its other metal parts not subjected to the test		N
19	Abnormal operation		N
19.1	The tests of 19.7 to 19.9 not carried out		N
19.101	Appliance operated at rated voltage with each of the following fault conditions:		N

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
	- short circuit of the terminals of the motor, including any capacitor incorporated in the motor circuit		N
	- short circuit of each diode of the rectifier		N
	- open circuit of the supply to the motor		N
	- open circuit of any parallel resistor, the motor being in operation		N
	Only one fault simulated at a time, the tests carried out consecutively		N
22	Construction		N
22.101	For class I appliances incorporating a motor supplied by a rectifier circuit, the d.c. circuit being insulated from accessible parts of the appliance by double or reinforced insulation		N
	Compliance checked by the tests specified for double and reinforced insulation		N
J	ANNEX J (NORMATIVE) COATED PRINTED CIRCUIT BOARDS		-
	Testing of protective coatings of printed circuit boards carried out in accordance with IEC 60664-3 with the following modifications:		N
5.7	Conditioning of the test specimens		N
	When production samples are used, three samples of the printed circuit board are tested		N
5.7.1	Cold		N
	The test is carried out at -25°C		N
5.7.3	Rapid change of temperature		N
	Severity 1 is specified		N
5.9	Additional tests		N
	This subclause is not applicable		N

K	ANNEX K (NORMATIVE) OVERVOLTAGE CATEGORIES		-
	The information on overvoltage categories is extracted from IEC 60664-1		P
	Overvoltage category is a numeral defining a transient overvoltage condition		P
	Equipment of overvoltage category IV is for use at the origin of the installation		N
	Equipment of overvoltage category III is equipment in fixed installations and for cases where the reliability and the availability of the equipment is subject to		N

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
	special requirements		
	Equipment of overvoltage category II is energy consuming equipment to be supplied from the fixed installation		P
	If such equipment is subjected to special requirements with regard to reliability and availability, overvoltage category III applies		N
	Equipment of overvoltage category I is equipment for connection to circuits in which measures are taken to limit transient overvoltages to an appropriate low level		N

L	ANNEX L (INFORMATIVE) GUIDANCE FOR THE MEASUREMENT OF CLEARANCES AND CREEPAGE DISTANCES		-
	Sequences for the determination of clearances and creepage distances		P

M	ANNEX M (NORMATIVE) POLLUTION DEGREE		-
	The information on pollution degrees is extracted from IEC 60664-1		P
	Pollution		-
	The microenvironment determines the effect of pollution on the insulation, taking into account the microenvironment		P
	Means may be provided to reduce pollution at the insulation by effective enclosures or similar		P
	Minimum clearances specified where pollution may be present in the microenvironment		P
	Degrees of pollution in the microenvironment		-
	For evaluating creepage distances, the following degrees of pollution in the microenvironment are established:		P
	- pollution degree 1: no pollution or only dry, non-conductive pollution occurs. The pollution has no influence		N
	- pollution degree 2: only non-conductive pollution occurs, except that occasionally a temporary conductivity caused by condensation is to be expected		P
	- pollution degree 3: conductive pollution occurs or dry non-conductive pollution occurs that becomes conductive due to condensation that is to be expected		N
	- pollution degree 4: the pollution generates persistent conductivity caused by conductive dust or by rain or snow		N

EN 60335-1

Clause	Requirement Test	Result - Remark	Verdict
--------	------------------	-----------------	---------

N	ANNEX N (NORMATIVE) PROOF TRACKING TEST		-
	The proof tracking test is carried out in accordance with IEC 60112 with the following modifications:		N
7	Test apparatus		-
7.3	Test solutions		-
	Test solution A is used		N
10	Determination of proof tracking index (PTI)		N
10.1	Procedure		-
	The proof voltage is 100V, 175V, 400V or 600V :		N
	The last paragraph of Clause 3 applies		N
	The test is carried out on five specimens		N
	In case of doubt, additional test with proof voltage reduced by 25V, the number of drops increased to 100		N
10.2	Report		-
	The report stating if the PTI value was based on a test using 100 drops with a test voltage of (PTI-25) V		N

O	ANNEX O (INFORMATIVE) SELECTION AND SEQUENCE OF THE TESTS OF CLAUSE 30		-
	Description of tests for determination of resistance to heat and fire		P

P	ANNEX P (INFORMATIVE) GUIDANCE FOR THE APPLICATION OF THIS STANDARD TO APPLIANCES USED IN WARM DAMP EQUABLE CLIMATES		-
	Modifications applicable for class 0 and 01 appliances having a rated voltage exceeding 150V, intended to be used in countries having a warm damp equable climate and that are marked		N
	Modifications may also be applied to class 1 appliances having a rated voltage exceeding 150V, intended to be used in countries having a warm damp equable climate and that are marked , if liable to be connected to a supply mains that excludes the protective earthing conductor		N
5	General conditions for the tests		N
5.7	The ambient temperature for the tests of Clauses 11 and 13 is 40 +3/0		N
7	Marking and instructions		N

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
7.1	The appliance marked with the letters		N
7.12	The instructions state that the appliance is to be supplied through a RCD having a rated residual operating current not exceeding 30 mA		N
	The instructions state that the appliance is considered to be suitable for use in countries having a warm damp equable climate, but may also be used in other countries		N
11	Heating		-
11.8	The values of Table 3 are reduced by 15 K		N
13	Leakage current and electric strength at operating temperature		N
13.2	The leakage current for class I appliances not exceeding 0,5 mA		N
15	Moisture resistance		-
15.3	The value of t is 37 °C		N
16	Leakage current and electric strength		N
16.2	The leakage current for class I appliances not exceeding 0,5 mA		N
19	Abnormal operation		N
19.13	The leakage current test of 16.2 is applied in addition to the electric strength test of 16.3		N

Q	ANNEX Q (INFORMATIVE) SEQUENCE OF TESTS FOR THE EVALUATION OF ELECTRONIC CIRCUITS	-
	Description of tests for appliances incorporating electronic circuits	P

R	ANNEX R (NORMATIVE) SOFTWARE EVALUATION	N
	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2 validated in accordance with the requirements of this annex	N
R.1	Programmable electronic circuits using software	N
	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2 constructed so that the software does not impair compliance with the requirements of this standard	N
R.2	Requirements for the architecture	N
	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2 use measures to control and avoid software-related	N

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
	faults/errors in safety-related data and safety-related segments of the software		
R.2.1.1	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in table R.2 have one of the following structures:		N
	- single channel with periodic self-test and monitoring		N
	- dual channel (homogenous) with comparison		N
	- dual channel (diverse) with comparison		N
	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in table R.1 have one of the following structures:		N
	- single channel with functional test		N
	- single channel with periodic self-test		N
	- dual channel without comparison		N
R.2.2	Measures to control faults/errors		N
R.2.2.1	When redundant memory with comparison is provided on two areas of the same component, the data in one area is stored in a different format from that in the other area		N
R.2.2.2	Programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in table R.2 and that use dual channel structures with comparison, have additional fault/error detection means for any fault/errors not detected by the comparison		N
R.2.2.3	For programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2, means are provided for the recognition and control of errors in transmissions to external safety-related data paths		N
R.2.2.4	For programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2, the programmable electronic circuits incorporate measures to address the fault/errors in safety-related segments and data indicated in table R.1 and R.2 as appropriate		N
R.2.2.5	For programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2, detection of a fault/error occur before compliance with clause 19 is impaired		N
R.2.2.6	The software is referenced to relevant parts of the operating sequence and the associated hardware functions		N
R.2.2.7	Labels used for memory locations are unique		N
R.2.2.8	The software is protected from user alteration of safety-related segments and data		N

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
R.2.2.9	Software and safety-related hardware under its control is initialized and terminates before compliance with clause 19 is impaired		N
R.3	Measures to avoid errors		N
R.3.1	General		N
	For programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2, the following measures to avoid systematic fault in the software are applied		N
	Software that incorporates measures used to control the fault/error conditions specified in table R.2 is inherently acceptable for software required to control the fault/error conditions specified in table R.1		N
R.3.2	Specification		N
R.3.2.1	Software safety requirements:	Software Id:	N
	The specification of the software safety requirements includes the descriptions listed		N
R.3.2.2	Software architecture		N
R.3.2.2.1	The specification of the software architecture includes the aspects listed - techniques and measures to control software faults/errors (refer to R.2.2); - interactions between hardware and software; - partitioning into modules and their allocation to the specified safety functions; - hierarchy and call structure of the modules (control flow); - interrupt handling; - data flow and restrictions on data access; - architecture and storage of data; - time-based dependencies of sequences and data	Document ref. No:	N
R.3.2.2.2	The architecture specification is validated against the specification of the software safety requirements by static analysis		N
R.3.2.3	Module design and coding		N
R.3.2.3.1	Based on the architecture design, software is suitably refined into modules		N
	Software module design and coding is implemented in a way that is traceable to the software architecture and requirements		N
R.3.2.3.2	Software code is structured		N
R.3.2.3.3	Coded software is validated against the module specification by static analysis		N
	The module specification is validated against the architecture specification by static analysis		N
R.3.3.3	Software validation		N

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
	The software is validated with reference to the requirements of the software safety requirements specification		N
	Compliance is checked by simulation of:		N
	- input signals present during normal operation		N
	- anticipated occurrences		N
	- undesired conditions requiring system action		N

Clause	Requirement Test	Result - Remark	Verdict
--------	------------------	-----------------	---------

TABLE R.1 ^e – GENERAL FAULT/ERROR CONDITIONS

Component ^a	Fault/error	Acceptable measures ^{b, c}	Definitions	Document reference for applied measure	Document reference for applied test	Verdict
1 CPU 1.1 Registers	Stuck at	Functional test, or periodic self-test using either: static memory test, or word protection with single bit redundancy	H.2.16.5 H.2.16.6 H.2.19.6 H.2.19.8.2			N
1.2 VOID						N
1.3 Programme counter	Stuck at	Functional test, or Periodic self-test, or Independent time-slot monitoring, or Logical monitoring of the programme sequence	H.2.16.5 H.2.16.6 H.2.18.10.4 H.2.18.10.2			N
2 Interrupt handling and execution	No interrupt or too frequent interrupt	Functional test, or time-slot monitoring	H.2.16.5 H.2.18.10.4			N
3 Clock	Wrong frequency (for quartz synchronized clock: harmonics/sub-harmonics only)	Frequency monitoring, or time slot monitoring	H.2.18.10.1 H.2.18.10.4			N
4. Memory 4.1 Invariable memory	All single bit faults	Periodic modified checksum, or multiple checksum, or word protection with single bit redundancy	H.2.19.3.1 H.2.19.3.2 H.2.19.8.2			N
4.2 Variable memory	DC fault	Periodic static memory test, or word protection with single bit redundancy	H.2.19.6 H.2.19.8.2			N
4.3 Addressing (relevant to variable and invariable memory)	Stuck at	Word protection with single bit redundancy including the address	H.2.19.8.2			N

EN 60335-1

Clause	Requirement Test	Result - Remark	Verdict
--------	------------------	-----------------	---------

TABLE R.1 ^e – GENERAL FAULT/ERROR CONDITIONS

Component ^a	Fault/error	Acceptable measures ^{b, c}	Definitions	Document reference for applied measure	Document reference for applied test	Verdict
5 Internal data path	Stuck at	Word protection with single bit redundancy	H.2.19.8.2			N
5.1 VOID						N
5.2 Addressing	Wrong address	Word protection with single bit redundancy including the address	H.2.19.8.2			N
6 External communication	Hamming distance 3	Word protection with multi-bit redundancy, or CRC – single word, or Transfer redundancy, or Protocol test	H.2.19.8.1 H.2.19.4.1 H.2.18.2.2 H.2.18.14			N
6.1 VOID						N
6.2 VOID						N
6.3 Timing	Wrong point in time Wrong sequence	Time-slot monitoring, or scheduled transmission Time-slot and logical monitoring, or comparison of redundant communication channels by either: reciprocal comparison independent hardware comparator Logical monitoring, or time-slot monitoring, or Scheduled transmission	H.2.18.10.4 H.2.18.18 H.2.18.10.3 H.2.18.15 H.2.18.3 H.2.18.10.2 H.2.18.10.4 H.2.18.18			N
7 Input/output periphery	Fault conditions specified in 19.11.2	Plausibility check	H.2.18.13			N
7.1 VOID						N
7.2 Analog I/O						N
7.2.1 A/D and D/A-converter	Fault conditions specified in 19.11.2	Plausibility check	H.2.18.13			N
7.2.2 Analog multiplexer	Wrong addressing	Plausibility check	H.2.18.13			N

EN 60335-1

Clause	Requirement Test	Result - Remark	Verdict
--------	------------------	-----------------	---------

TABLE R.1 ^e – GENERAL FAULT/ERROR CONDITIONS

Component ^a	Fault/error	Acceptable measures ^{b, c}	Definitions	Document reference for applied measure	Document reference for applied test	Verdict
8 VOID						N
9 Custom chips ^d e.g. ASIC, GAL, gate array	Any output outside the static and dynamic functional specification	Periodic self-test	H.2.16.6			N

NOTE A Stuck-at fault model denotes a fault model representing an open circuit or a non-varying signal level. A DC fault model denotes a stuck-at fault model incorporating short circuit between signal lines.

- a) For fault/error assessment, some components are divided into their sub-functions.
b) For each sub-function in the table, the Table R.2 measure will cover the software fault/error.
c) Where more than one measure is given for a sub-function, these are alternatives.
d) To be divided as necessary by the manufacturer into sub-functions.
e) Table R.1 is applied according to the requirements of R.1 to R.2.2.9 inclusive.

S	ANNEX S (NORMATIVE) BATTERY OPERATED APPLIANCES POWERED BY BATTERIES THAT ARE NON-RECHARGEABLE OR NOT RECHARGED IN THE APPLIANCE					N
	The following modifications to this standard are applicable for battery-operated appliances where the batteries are either non-rechargeable (primary batteries), or					N
	rechargeable batteries (secondary batteries) that are not recharged in the appliance					N
5.8.1	If the supply terminals for the connection of the battery have no indication of polarity, the more unfavourable polarity is applied					N
5.S.101	Appliances intended for use with a battery box are tested with the battery box supplied with the appliance or with the battery box recommended in the instructions					N
5.S.102	Appliances are tested as motor-operated appliances.					N
7.1	Appliances marked with the battery voltage (V) and the polarity of the terminals, unless.....:					N
	the polarity is irrelevant					N
	Appliances also marked with:					—
	– name, trade mark or identification mark of the manufacturer or responsible vendor.....:					N
	– model or type reference.....:					N
	– IP number according to degree of protection against ingress of water, other than IPX0.....:					N

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
	– type reference of battery or batteries.....:		N
	If relevant, the positive terminal is indicated by the symbol IEC 60417-5005 and the negative terminal by the symbol IEC 60417-5006		N
	If appliances use more than one battery, they are marked to indicate correct polarity connection of the batteries		N
7.6	Additional symbols		N
7.12	The instructions contain the following, as applicable:		—
	– the types of batteries that may be used... ..:		N
	– how to remove and insert the batteries		N
	– non-rechargeable batteries are not to be recharged		N
	– rechargeable batteries are to be removed from the appliance before being charged		N
	– different types of batteries or new and used batteries are not to be mixed		N
	– batteries are to be inserted with the correct polarity		N
	– exhausted batteries are to be removed from the appliance and safely disposed of		N
	– if the appliance is to be stored unused for a long period, the batteries are removed		N
	– the supply terminals are not to be short-circuited		N
11.5	Appliances are supplied with the most unfavourable supply voltage between		—
	– 0,55 and 1,0 times the battery voltage, if the appliance can be used with non-rechargeable batteries		N
	– 0,75 and 1,0 times battery voltage, if the appliance is designed for use with rechargeable batteries only		N
	The values specified in Table S.101 for the internal resistance per cell of the battery is taken into account		N
19.1	The tests are carried out with the battery fully charged unless otherwise specified		N
19.13	The battery does not rupture or ignite		N
19.S.101	Appliances are supplied with the voltage specified in 11.5. The supply terminals having an indication of polarity are connected to the opposite polarity, unless		N
	such a connection is unlikely to occur due to the construction of the appliance		N
19.S.102	For appliances with provision for multiple batteries, one or more of the batteries are reversed and the		N

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
	appliance is operated, if reversal of batteries is allowed by the construction		
25.5	The flexible leads or flexible cord used to connect an external battery or battery box in is connected to the appliance by a type X attachment		N
25.13	This requirement is not applicable to the flexible leads or flexible cord connecting external batteries or a battery box with an appliance		N
25.S.101	Appliances have suitable means for connection of the battery. If the type of battery is marked on the appliance, the means of connection is suitable for this type of battery		N
26.5	Terminal devices in an appliance for the connection of the flexible leads or flexible cord connecting an external battery or battery box are so located or shielded that there is no risk of accidental connection between supply terminals		N
30.2.3.2	There is no battery in the area of the vertical cylinder used for the consequential needle flame test, unless		N
	the battery is shielded by a barrier that meets the needle flame test of Annex E, or		N
	that comprises material classified as V-0 or V-1 according to IEC 60695-11-10		N

T	ANNEX T (NORMATIVE) UV-C RADIATION EFFECT ON NON-METALLIC MATERIALS		N
	Requirements for non-metallic materials subject to direct or reflected UV-C radiation exposure and whose mechanical and electrical properties are relied upon for compliance with the		N
	Does not apply to glass, ceramic and similar materials		N
	Tested as specified in ISO 4892-1 and ISO 4892-2, with the following modifications:		N
	Modifications to ISO 4892-1:		N
5.1.6	The UV-C emitter is a low pressure mercury lamp with a quartz envelope having a continuous spectral irradiance of 10 W/m ² at 254 nm		N
	Subclause 5.1.6.1 and Table 1 are not applicable		N
5.2.4	The black-panel temperature shall be 63 °C +/- 3 °C		N
5.3.1	Humidification of the chamber air is specified in part 2 when necessary		N
9	This clause is not applicable		N
	Modifications to ISO 4892-2:		
7.1	At least three test specimens are tested		N
	Ten samples of internal wiring is tested		N
7.2	The specimens are attached to the specimen holders		N

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
	such that they are not subject to any stress		
7.3	Apparatus prepared as specified		N
	The test specimens and, if used, the irradiance-measuring instrument are exposed for 1 000 h		N
7.4	If used, a radiometer is mounted and calibrated such that it measures the irradiance at the exposed surface of the test specimen		N
7.5	Material properties and test methods for parts providing mechanical support or impact resistance as specified in Table T.1		N
	Material properties and test method for electrical insulation of internal wiring as specified in Table T.2		N
8	This clause is not applicable		N

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict

ATTACHMENT TO TEST REPORT			
IEC 60335-1:2010, IEC 60335-1:2010/AMD1:2013, IEC 60335-1:2010/AMD2:2016			
EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES			
Household and similar electrical appliances – Safety –			
Part 1: GENERAL REQUIREMENTS			
Differences according to.....:		EN 60335- 1:2012 + A11:2014 + A13:2017 + A1:2019 + A14:2019 + A2:2019 + A15:2021 + A16:2023 EN 62233:2008	
TRF template used.....:		IECEE OD-2020-F2:2022, Ed. 1.2	
Attachment Form No.....:		EU_GD_IEC60335_1X_III	
Attachment Originator.....:		Nemko Group AS	
Master Attachment.....:		Dated 2024-01-19	
Copyright © 2024 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.			
	CENELEC COMMON MODIFICATIONS (EN)		-
6.1	Delete “class 0” and “class 01”		P
7.1	Single-phase appliances to be connected to the supply mains: 230 V covered		P
	Multi-phase appliances to be connected to the supply mains: 400 V covered		N
7.12	The instructions include the substance of the following:		P
	- this appliance can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved		P
	- children shall not play with the appliance		P
	- cleaning and user maintenance shall not be made by children without supervision		P
8.1.1	Also test probe 18 of EN 61032 is applied		N
	The appliance being in every possible position during the test, except that		N
	appliances normally used on the floor and having a mass exceeding 40 kg are not tilted		N
	The force on the probe in the straight position is increased to 10 N when probe 18 is used		N
	When using test probe 18 the appliance is fully assembled as in normal use without any parts removed, and		N
	parts intended to be removed for user maintenance are also not removed		N

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
8.1.3	Instead of test probe B, test probe 18 and test probe 13, for appliances other than those of class II, test probe 41 of IEC 61032 is applied with a force not exceeding 1 N to live parts of visibly glowing heating elements, all poles of which can be disconnected by a single switching action		P
8.2	Compliance is checked by inspection and by applying the test probes of EN 61032 in accordance with the conditions specified in 8.1.1		P
	Test probe B and probe 18 of EN 61032 are applied to built-in appliances and fixed appliances only after installation		N
15.1.2	Appliances with an automatic cord reel tested with the cord in the most unfavourable position so that the reeling of the wet cord may affect electrical insulation during operation, the cord not being dried before reeling		N
20.2	For appliances having hazardous moving parts, due to their working function, e.g. the needle of a sewing machine, tools of kitchen machines or the blade of an electrical knife, full protection is not possible for performing their intended use		P
	When using a test probe similar to test probe B of EN 61032, having a circular stop face and applied with a force of 5N, the accessories and detachable covers are removed		P
	When using test probe 18 it is applied with a force of 2,5N on the appliance fully assembled		P
22.12	Other parts intended to be detached during use, maintenance or cleaning (e.g. batteries, battery covers, lids, attachments, steam nozzles) are not considered as parts providing a similar function as handles, knobs, grips, levers		P
22.17	The requirement is not applicable to built-in appliances		P
22.44	An appliance is child-appealing if one of the following criteria is present:		N
	- appliance decorated using faces, cartoon like characters, or similar images		N
	- appliance using shapes representing animals, characters, persons or scale models		N
	An appliance is child-appealing if more than one of the following criteria are present:		N
	- using non-functional light (functional light is e.g. illumination of an object or area, signal indicating status of an appliance)		N
	- using non-functional sound (e.g. music)		N
	- using non-functional movement		N
	If the appliance is child-appealing and		N
	- has a mass less than 4 kg, and		N

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
	- is mounted or normally intended for use at a height less than 850 mm,		N
	the following conditions are met:		N
	- surface temperature rise requirements not exceeded		N
	- hazardous moving parts not accessible		N
	- live parts not accessible		N
	- liquid temperature requirement not exceeded,		N
	unless for vessels in which two independent and sequential actions are needed to access the liquid		N
	- the requirement of 22.12 is applicable for all accessible parts of the appliance		N
24.1	Components comply with the safety requirements specified in the relevant EN standards as far as they reasonably apply		P
	Motors are not required to comply with EN 60034-1, but tested as part of the appliance according to this standard		P
	Relays are tested as part of the appliance according to this standard		N
	Relays may be alternatively tested to EN 60730-1 and the additional requirements in EN 60335-1		N
	The requirements of Clause 29 of this standard apply between live parts of components and accessible parts of the appliance		N
	Components may comply with the requirements for clearances and creepage distances for functional insulation as specified in the relevant component standard		P
	The requirements of 30.2 of this standard apply to parts of non-metallic material in components including parts of non-metallic material supporting current-carrying connections inside components		P
	Components that have not been tested and shown to comply with the EN standard for the relevant component are tested according to the requirements of 30.2 of this standard		P
	Components that have been tested and shown to comply with the resistance to fire requirements in the EN standard for the relevant component need not be retested provided that:		P
	- the severity specified in the component standard is not less than the severity specified in 30.2, and		P
	- the test report for the component states the values of t_e and t_i acc. to EN 60695-2-11		P
	If the above two conditions are not satisfied, the component is tested as part of the appliance		N

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
	Power electronic converter circuits are not required to comply with EN 62477-1, but tested as part of the appliance according to this standard		N
	Unless components have been tested and found to comply with the relevant EN standard for the number of cycles specified, they are tested in accordance with 24.1.1 to 24.1.9		N
	For components mentioned in 24.1.1 to 24.1.9, no additional tests specified in the relevant EN standard for the component are necessary other than those specified in 24.1.1 to 24.1.9		N
	Components that have not been tested and found to comply with the relevant EN standard, and		N
	components that are not marked or not used in accordance with their marking,		N
	are tested in accordance with the conditions occurring in the appliance, the number of samples being that required by the relevant standard		N
	Lamp-holders and starter-holders that have not been tested and found to comply with the relevant EN standard are tested as a part of the appliance and additionally comply with the gauging and interchangeability requirements of the relevant EN standard under the conditions occurring in the appliance		N
	Where the relevant EN standard specifies these gauging and interchangeability requirements at elevated temperatures, the temperatures measured during the tests of Clause 11 are used		P
	There are no additional tests specified for nationally standardized plugs such as those detailed in IEC/TR 60083 or connectors complying with the standard sheets of EN 60320-1 and EN 60309, unless they are specifically mentioned in the text of this standard		N
	Plugs and socket-outlets and other connecting devices of interconnection cords are not interchangeable with plugs and socket-outlets listed in IEC/TR 60083 or IEC 60906-1, or		N
	with connectors and appliance inlets complying with the standard sheets of EN 60320-1, if		N
	direct supply to these parts from the supply mains gives rise to a hazard		N
	For plugs used in CENELEC countries Annex ZH applies		P
24.Z1	Type S2 and S3 capacitors according to EN 60252-1 are not required to undergo the testing as required by 30.2.2 and 30.2.3.1		N
25.1	Plugs and pins for insertion into socket outlets follow the relevant standards sheets in Annex ZH		P

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
25.7	Rubber sheathed cords (60245 IEC 53) are not suitable for appliances intended to be used outdoors, or		N
	when they are liable to be exposed to significant amount of ultraviolet radiation		N
25.25	Instead of IEC/TR 60083, dimensions of the pins and engagement face of plugs of appliances that are inserted into socket-outlets are in accordance with the dimensions of the relevant plug standard		P
	Common plugs and socket-outlets types in CENELEC countries as shown in Annex ZH		P
26.11	Conductors connected by soldering are not considered to be positioned or fixed so that reliance is not placed upon the soldering alone to maintain them in position,		N
	unless they are held in place near the terminals independently of the solder		N
29.3.Z1	Appliance constructed so that if there is a possibility of damaging the insulation during installation, the insulation withstands the scratch and penetration test of 21.2		N
32	Compliance regarding electromagnetic fields is checked according to EN 62233		P
Annex I, 19.1.101	The appliance is supplied at rated voltage and operated under normal operation with each of the fault conditions specified		P
	The duration of any of the tests is as specified in 19.7		P
ZA	ANNEX ZA (NORMATIVE) SPECIAL NATIONAL CONDITIONS (EN)		P
	Denmark, Sweden, Norway and Finland		-
7.12.8	The maximum inlet water pressure is at least 1,0 MPa		N
	Norway		-
19.5	The test is also applicable to appliances intended to be permanently connected to fixed wiring		N
	Norway		-
22.2	The second paragraph of this subclause, dealing with single-phase, permanently connected class I appliances having heating elements, is not applicable due to the supply system		N

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
	Denmark		-
22.47	The maximum inlet water pressure is at least 1,0 MPa		N
	Ireland, United Kingdom and Cyprus		-
25.8	In the table, the line >10 A and ≤16 A is replaced with:		P
	> 10 and ≤ 13 1,25 (1,0) ^b		N
	> 13 and ≤ 16 1,5 (1,0) ^b		
			P
ZB	ANNEX ZB (INFORMATIVE) A-DEVIATIONS		-
	Ireland		-
25.1 and 25.25	These regulations apply to all plugs for domestic use at a voltage of not less than 200 V and in general allow only plugs complying with I.S. 401:1997, or equivalent, to be fitted to domestic appliances		N
	United Kingdom		-
25.1 and 25.25	These regulations apply to all plugs for domestic use at a voltage of not less than 200 V and in general allow only plugs to BS 1363 to be fitted to domestic appliances.		N
	It also allows plugs to BS 4573 and EN 50075 to be fitted to shavers and toothbrushes		N
ZC	ANNEX ZC (NORMATIVE) NORMATIVE REFERENCES TO INTERNATIONAL PUBLICATIONS WITH THEIR CORRESPONDING EUROPEAN PUBLICATIONS		-
	A list of documents referred to in the text of this standard in such a way that some or all of their content constitutes requirements of this document		P
ZD	ANNEX ZD (INFORMATIVE) IEC and CENELEC CODE DESIGNATIONS FOR FLEXIBLE CORDS		-
	List of IEC and CENELEC code designations for flexible cords		P
ZE	ANNEX ZE (INFORMATIVE) SPECIFIC ADDITIONAL REQUIREMENTS FOR APPLIANCES AND MACHINES INTENDED FOR COMMERCIAL USE		-
7.1	Business name and full address of the manufacturer and, where applicable, his authorized representative		N

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
	:		
	Model or type reference.....:		N
	Serial number, if any		N
	Production year		N
	Designation of the appliance..... :		N
7.12	Instructions provided with the appliance so that the appliance can be used safely		N
	The instructions contain at least the following information:		N
	- the business name and full address of the manufacturer and, where applicable, his authorized representative		N
	- model or type reference of the appliance as marked on the appliance itself, except for the serial number		N
	- the designation of the appliance together with its explanation in case it is given by a combination of letters and/or numbers		N
	- the general description of the appliance, when needed due to the complexity of the appliance		N
	- specific precautions required during installation, operation, adjusting, user maintenance, cleaning, repairing or moving		N
	- when needed drawings, diagrams, descriptions and explanations necessary for the safe use and user maintenance of the appliance		N
	- the possible reasonably foreseeable misuse and, whenever relevant, a warning against the effects it may have on the safe use of the appliance		N
	The words "Original instructions" appear on the language version(s) verified by the manufacturer or by the authorized representative		N
	When a translation of the original instructions has been provided by a person introducing the appliance on the market; the meaning of the sentence "Translation of the original instructions" appear in the relevant instructions delivered with the appliance		N
	The instructions for maintenance/service to be done by specialized personnel, mandated by the manufacturer or the authorized representative may be supplied in only one Community language which the specialized personnel understand		N
	The instructions indicate the type and frequency of inspections and maintenance required for safe operation including the preventive maintenance measures		N
7.12.ZE1	If needed for specific appliances, the following information to be given:		N
	- on use, transportation, assembly, dismantling when out of service, testing or foreseeable breakdowns, if		N

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
	these operations have consequences on stability of the appliance in order to avoid overturning, falling or uncontrolled movements of the appliance or of its component parts		
	- on how to maintain adequate mechanical stability when in use, during transportation, assembly, dismantling, scrapping and any other action involving the appliance		N
	- on the protective measures to be taken by the user, including, where appropriate, the personal protective equipment to be provided		N
	- on the operating method to be followed in the event of accident or breakdown; if a blockage is likely to occur the operating method to safely unblock the appliance		N
	- on the specifications on the spare parts to be used, when these affect the health and safety of the operator		N
	- on airborne noise emissions, determined and declared in accordance with the relevant Part 2, which includes:		N
	- the A-weighted emission sound pressure level at workstations, where this exceeds 70 dB(A)..... ;		N
	- where this level does not exceed 70 dB(A), this fact is indicated		N
	- the peak C-weighted instantaneous sound pressure value at workstations, where this exceeds 63 Pa (130 dB in relation to 20 µPa)..... :		N
	- the A-weighted sound power level emitted by the machinery, where the A-weighted emission sound pressure level at workstations exceeds 80 dB(A)..... :		N
7.12.ZE2	The instructions include a warning to disconnect the appliance from its power source during service and when replacing parts		N
	If the removal of the plug is foreseen, it is clearly indicated that the removal of the plug is such that an operator can check from any of the points to which he has access that the plug remains removed		N
	If this is not possible, due to the construction of the appliance or its installation, a disconnection with a locking system in the isolated position is provided		N
19.11.4.8	The appliance continues to operate, without causing any hazard to the user, from the same point in its operating cycle at which the voltage fluctuation occurred, or		N
	a manual operation is required to restart it		N
20.1	Appliances and their components and fittings have		N

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
	adequate mechanical stability during transportation, assembly, dismantling and any other action involving the appliance		
20.2	Dangerous moving transmission parts safeguarded either by design or guards		N
	When guards are used, they are fixed guards, interlocking movable guards or protective devices		N
	Moving parts directly involved in the function of the appliance which cannot be made completely inaccessible fitted with:		N
	- fixed guards or interlocking movable guards preventing access to those sections of the parts that are not used in the work, and		N
	- adjustable guards restricting access to those sections of the moving parts where access is necessary		N
	Interlocking movable guards used where frequent access is required		N
21.1	Appliances and their components and fittings have adequate mechanical strength and is constructed to withstand such rough handling that may be expected in normal use, during transportation, assembly, dismantling, scrapping and any other action involving the appliance		N
22.ZE.1	For appliances provided with a seat, the seat gives adequate stability		N
	The distance between the seat and the control devices capable of being adapted to the operator		N
22.ZE.2	For appliances provided with separate devices for the start and the stop functions, the stop function is unambiguously identifiable and does always override the start function		N
	For appliances provided with one device performing the start and the stop function, the stop function is unambiguously identifiable and does always override the start function		N
22.ZE.3	Appliances designed in such a way that incorrect mounting is avoided, if this can lead to an unsafe situation		N
	If this is not possible, information on the correct mounting is given directly on the part and/or the enclosure		N
22.ZE.4	Where the weight, size or shape prevents appliances from being moved manually, they are fitted with attachments for lifting gear, or		N
	so designed that they can be fitted with such attachments, or		N
	be shaped in such a way that standard lifting gear can easily be used		N

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
	Appliances to be moved manually are constructed or equipped so that they can be moved easily and safely		N
22.ZE.5	The fixing systems of fixed guards which prevent access to hazardous moving transmission parts only removable with the use of tools		N
	If such guards have to be removed by the user for routine cleaning or maintenance their fixing systems remain attached to the fixed guards or to the machine after removal		N
	Where possible, guards are incapable of remaining in place without their fixings		N
	This does not apply if, after removal of the screws, or if the component is incorrectly repositioned, the appliance becomes inoperative		N
	Movable guards are interlocked		N
	The interlocking devices prevent the start of hazardous appliance functions until the guards are fixed in their position, and give a stop command whenever they are no longer closed		N
	Where it is possible for an operator to reach the danger zone before the risk due to hazardous appliance functions has ceased, movable guards associated with a guard locking device in addition to an interlocking device that:		N
	- prevents the start of hazardous appliance functions until the guard is closed and locked, and		N
	- keeps the guard closed and locked until the risk of injury from the hazardous appliance functions has ceased		N
	Interlocking movable guards remain attached to the appliance when open, and		N
	they are designed and constructed in such a way that they can be adjusted only by means of an intentional action		N
22.ZE.6	Interlocking movable guards designed in such a way that the absence or failure of one of their components prevents starting or stops the hazardous appliance functions		N
	The guard is opened to the extent needed to cause the interlocking to operate and is then closed, the number of operations being defined in the specific Part 2..... :		N
	After this test any defect that may be expected in normal use is applied to the interlock system, including interruption of the supply, only one defect being simulated at a time		N
	After these tests the interlock system is fit for further use		N
22.ZE.7	Adjustable guards restricting access to areas of the moving parts strictly necessary for		N

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
	the work are:		
	- adjustable manually or automatically, depending on the type of work involved, and		N
	- readily adjustable without the use of tools		N
22.ZE.8	In case of interruption, re-establishment after an interruption or fluctuation in whatever manner of the power supply, the appliance does not restart		N
	However, automatic restarting of the operation is allowed if the appliance may continue to operate, without causing any hazard to the user, from the same point in its operating cycle at which the voltage interruption or fluctuation occurred		N
22.ZE.9	Appliances fitted with means to isolate them from all energy sources		N
	Such isolators are clearly identified, and		N
	they are capable of being locked if reconnection endanger persons		N
	After the energy source is disconnected, it is possible to dissipate any energy remaining or stored in the circuits of the appliance without risk to persons		N
22.ZE.10	Noise reduction is achieved by applying measures at source to control noise, for example EN ISO 11688-1:2009		N
	The success of the applied noise reduction measures is assessed based on the actual noise emission values in relation to other machines of the same type with comparable non-acoustical technical data		N
	Compliance is checked by the noise test code, if any, given in part 2		N
ZF	ANNEX ZF (INFORMATIVE) CRITERIA APPLIED FOR THE ALLOCATION OF PRODUCTS COVERED BY STANDARDS IN THE EN 60335 SERIES UNDER LVD OR MD		-
	List of standards under CENELEC/TC61 with the allocation under the LVD (Low Voltage Directive) or the MD (Machinery Directive)..... :		P
ZG	ANNEX ZG (NORMATIVE) UV APPLIANCES		-
	The following modifications to this standard apply to appliances having UV emitters		N
	This annex is not applicable to appliances covered by the scopes of IEC 60335-2-27, IEC 60335-2-59 or IEC 60335-2-109		N
7.12.ZG	The instructions for appliances incorporating UVC emitters include the substance of the following:		N

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
	WARNING — This appliance contains a UV emitter. Do not stare at the light source		
32	For appliances incorporating UV emitters the manufacturer delivers a declaration providing evidence that the plastic material exposed to the radiation is UV resistant		N
ZH	ANNEX ZH (INFORMATIVE) Common plug and socket-outlet types in CENELEC countries		-
	In general, supply cords of single-phase appliances having a rated current not exceeding 16 A are fitted with a plug complying with the following standard sheets:		P
	- for class I appliances or class II appliances with functional earth, standard sheet EU2, EU3 or EU4:		N
	- for class II appliances, standard sheet EU5, EU6 or EU7.....:		P
	There are exemptions or differences in certain CENELEC countries		P
ZI	ANNEX ZI (INFORMATIVE) Information on the application of A11:2014 to EN 60335-1:2012 CENELEC CLC/TC 61(SEC)2096A		-
	Clarification of the application of parts 2 in conjunction with the 2002 or 2012 version of EN 60335-1		P
ZZA	ANNEX ZZA (INFORMATIVE) RELATIONSHIP BETWEEN THIS EUROPEAN STANDARD AND THE SAFETY OBJECTIVES OF DIRECTIVE 2014/35/EU [2014 OJ L96] AIMED TO BE COVERED		-
	This standard provides one means of conforming to safety objectives of Directive 2014/35/EU		P
	When cited in the Official Journal under that Directive, compliance with the normative clauses of this standard given in Table ZZA.1 confers a presumption of conformity with the safety objectives of that Directive and associated EFTA regulations		P
	Compliance with this Part 1 when used together with the relevant Part 2 provides one means of conformity with the safety objectives		P
ZZB	ANNEX ZZB (INFORMATIVE) RELATIONSHIP BETWEEN THIS EUROPEAN STANDARD AND THE ESSENTIAL REQUIREMENTS OF DIRECTIVE 2006/42/EC AIMED TO BE COVERED		-
	This standard provides one means of conforming to essential requirements of EU Directive 2006/42/EC		P
	When cited in the Official Journal under that Directive, compliance with the normative clauses of		P

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict
	this standard given in Table ZZB.1 confers a presumption of conformity with the essential requirements of that Directive and associated EFTA regulations		
	Compliance with this Part 1 when used together with the relevant Part 2 provides one means of conformity with the essential health and safety requirements		P
	ANNEX EN 62233:2008 + AC:2008 EMF- ELECTROMAGNETICS FIELDS		P
	The tested product also complies with the requirements of EN 62233:2008		P
	Limit100%	Measured max. : 8.33%	P

EN 60335-1

Clause	Requirement Test	Result - Remark	Verdict
--------	------------------	-----------------	---------

10.1	TABLE: Power input deviation					N
Input deviation of/at:	P rated (W)	P measured (W)	dP	Required dP	Remark	
--	--	--	--	--	--	
--	--	--	--	--	--	

10.2	TABLE : Current deviation					P
Current deviation of/at:	I rated (A)	I measured (A)	dP	Required dP	Remark	
DC5V	2.0	1.99	-0.50%	+15%	--	

11.8	TABLE: Heating test, thermocouples					P
	Test voltage (V)..... :		Battery			—
	Ambient (°C)..... :		24.7			—
Thermocouple locations		Dt (K)		Max. Dt (K)		
IC of PCB		16.1		130		
LED PCB		11.4		130		
Enclosure inside		13.2		Ref		
Enclosure outside		9.4		70		
Button		5.2		60		
Test corner		1.6		65		

13.2	TABLE: Leakage current			P
	Heating appliances: 1.15 x rated input..... :	--		—
	Motor-operated and combined appliances 1.06 x rated voltage..... :	DC5Vx1.06		—
Leakage current between		I (mA)	Max. allowed I (mA)	
Input terminal and appliance plastic enclosure		0.005	0.7 peak	

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict

13.3	TABLE: Electric strength		P
Test voltage applied between:		Voltage (V)	Breakdown (Yes/No)
Input terminal and appliance plastic enclosure		500	No

14	TABLE: Transient overvoltages					N/A
Clearance between:		CI (mm)	Required CI (mm)	Rated impulse voltage (V)	Impulse test voltage (V)	Flashover (Yes/No)
--		--	--	--	--	--
Supplementary information:						

16.2	TABLE: Leakage current			P
	Single phase appliances: 1.06 x rated voltage.....:	DC5Vx1.06		—
	Three phase appliances 1.06 x rated voltage divided by $\sqrt{3}$:.....:	--		—
Leakage current between		I (mA)	Max. allowed I (mA)	
Input terminal and appliance plastic enclosure		0.005	0.25	

16.3	TABLE: Electric strength		P
Test voltage applied between:		Voltage (V)	Breakdown (Yes/No)
Input terminal and appliance plastic enclosure		500	No

17	TABLE: Overload protection		N/A
Thermocouple locations:		Max. temperature rise measured, ΔT (K)	Max. temperature rise limit, ΔT (K)
--		--	--
Supplementary information:			

17	TABLE: Overload protection, resistance method					N/A
	Test voltage (V).....:		--		—	
	Ambient, t1 (°C)..... :		--		—	
	Ambient, t2 (°C)..... :		--		—	
Temperature of winding:		R1 (Ω)	R2 (Ω)	Δ T (K)	T (°C)	Max. T (°C)
--		--	--	--	--	--
Supplementary information:						

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict

19	Abnormal operation conditions						P
Operational characteristics		YES/NO	Operational conditions				
Are there electronic circuits to control the appliance operation?		NO	--				
Are there "off" or "stand-by" position?		NO	--				
The unintended operation of the appliance results in dangerous malfunction?		NO	--				
Sub-clause	Operating conditions description	Test results description	PEC description	EMP 19.11.4	Software type required	19.11.3 PEC	Final result
19.2	N.A	N.A	N.A	N.A	N.A	N.A	N.A
19.3	N.A	N.A	N.A	N.A	N.A	N.A	N.A
19.4	N.A	N.A	N.A	N.A	N.A	N.A	N.A
19.5	N.A	N.A	N.A	N.A	N.A	N.A	N.A
19.6	N.A	N.A	N.A	N.A	N.A	N.A	N.A
19.7	Normal	Rated max. voltage	N.A	N.A	N.A	N.A	Pass
19.8	N.A	N.A	N.A	N.A	N.A	N.A	N.A
19.9	N.A	N.A	N.A	N.A	N.A	N.A	N.A
19.10	N.A	N.A	N.A	N.A	N.A	N.A	N.A
19.11.2	N.A	N.A	N.A	N.A	N.A	N.A	N.A
19.11.4.8	N.A	N.A	N.A	N.A	N.A	N.A	N.A
19.10X	N.A	N.A	N.A	N.A	N.A	N.A	N.A
Supplementary information:							

EN 60335-1

Clause	Requirement Test	Result - Remark	Verdict
--------	------------------	-----------------	---------

19.7	TABLE: Abnormal operation, locked rotor/moving parts					N/A
	Test voltage (V).....:		--			—
	Ambient, t1 (°C).....:		--			—
	Ambient, t2 (°C).....:		--			—
Temperature of winding:		R1 (Ω)	R2 (Ω)	Δ T (K)	T (°C)	Max. T (°C)
--		--	--	--	--	--
Supplementary information:						

19.9	TABLE: Abnormal operation, running overload					N/A
	Test voltage (V).....:		--			—
	Ambient, t1 (°C).....:		--			—
	Ambient, t2 (°C).....:		--			—
Temperature of winding:		R1 (Ω)	R2 (Ω)	Δ T (K)	T (°C)	Max. T (°C)
--		--	--	--	--	--
Supplementary information:						

19.13	TABLE: Abnormal operation, temperature rises		P
Thermocouple locations:		Max. temperature rise measured, ΔT (K)	Max. temperature rise limit, ΔT (K)
Test corner		1.5	150
Supplementary information:			

21.1	TABLE: Impact resistance			P
Impacts per surface		Surface tested	Impact energy (Nm)	Comments
Three side of enclosure		Plastic enclosure	0.5J	No damaged
Supplementary information:				

EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict

24.1	TABLE: Components				P
object part No.	manufacturer/trademark	type/model	technical data	standard	mark(s) of conformity
Enclosure	Interchangeable	Interchangeable	ABS , Min, thickness: 2.0mm	IEC 60335-1	UL
PCB	Interchangeable	Interchangeable	V-0	UL 795	UL
Internal Wire	Interchangeable	Interchangeable	300V 80°C 18-26AWG	IEC 60335-1	Tested with appliance

28.1	TABLE: Threaded part torque test			P
Threaded part identification:		Diameter of thread (mm)	Column number (I, II, or III)	Applied torque (Nm)
Enclosure		2.85	II	0.5
Supplementary information:				

29.1	TABLE: Clearances Overvoltage category					P
Rated impulse voltage (V)	Min. cl (mm)	Type of insulation				Verdict
		Basic	Functional	Supplementary	Reinforced	
330	0,2* / 0,5 / 0,8**	-	-	-	-	N
550	0,2* / 0,5 / 0,8**	-	1.8	-	-	P
800	0,2* / 0,5 / 0,8**	-	-	-	-	N
1500	0,5 / 0,8** / 1,0***	-	-	-	-	N
2500	1,5 / 2,0***	-	-	-	-	N
4000	3,0 / 3,5***	-	-	-	-	N
6000	5,5 / 6,0***	-	-	-	-	N
8000	8,0 / 8,5***	-	-	-	-	N
10000	11,0 / 11,5***	-	-	-	-	N

supplementary information:

*) For tracks on printed circuit boards if pollution degree 1 and 2

**) For pollution degree 3

***) If the construction is affected by wear, distortion, movement of the parts or during assembly

29.2	TABLE: Creepage distances, basic, supplementary and reinforced insulation			N
Working voltage (V)	Creepage distance (mm) Pollution degree			

EN 60335-1

Clause	Requirement Test	Result - Remark	Verdict
--------	------------------	-----------------	---------

	1	2			3			Type of insulation			
		Material group			Material group						
		I	II	IIIa/IIIb	I	II	IIIa/IIIb	B*)	S*)	R*)	Verdict
≤50	0,2	0,6	0,9	1,2	1,5	1,7	1,9	—	—	—	--
>50 and ≤125	0,3	0,8	1,1	1,5	1,9	2,1	2,4	—	—	—	--
>125 and ≤250	0,6	1,3	1,8	2,5	3,2	3,6	4,0	—	—	—	--
>125 and ≤250	0,6	1,3	1,8	2,5	3,2	3,6	4,0	—	—	—	--
>125 and ≤250	1,2	2,6	3,6	5,0	6,4	7,2	8,0	—	—	—	--
>250 and ≤400	1,0	2,0	2,8	4,0	5,0	5,6	6,3	—	—	—	--
>400 and ≤500	2,6	5,0	7,2	10,0	12,6	14,2	16,0	—	—	—	--
>500 and ≤800	3,6	6,4	9,0	12,6	16,0	18,0	20,0	—	—	—	--
>800 and ≤1000	2,4	4,0	5,6	8,0	10,0	11,0	12,5	—	—	—	--
>1000 and ≤1250	3,2	5,0	7,1	10,0	12,5	14,0	16,0	—	—	—	--
>1250 and ≤1600	8,4	12,6	18,0	25,0	32,0	36,0	40,0	—	—	—	--
>1600 and ≤2000	5,6	8,0	11,0	16,0	20,0	22,0	25,0	—	—	—	--
>2000 and ≤2500	15,0	20,0	28,0	40,0	50,0	56,0	64,0	—	—	—	--
>2500 and ≤3200	10,0	12,5	18,0	25,0	32,0	36,0	40,0	—	—	—	--
>3200 and ≤4000	25,0	32,0	44,0	64,0	80,0	90,0	100,0	—	—	—	--
>4000 and ≤5000	16,0	20,0	28,0	40,0	50,0	56,0	63,0	—	—	—	--
>5000 and ≤6300	20,0	25,0	36,0	50,0	63,0	71,0	80,0	—	—	—	--
>6300 and ≤8000	25,0	32,0	45,0	63,0	80,0	90,0	100,0	—	—	—	--
>8000 and ≤10000	64,0	80,0	112,0	160,0	200,0	220,0	250,0	—	—	—	--
>10000 and ≤12500	40,0	50,0	71,0	100,0	125,0	140,0	160,0	—	—	—	--

*), B=Basic, S=Supplementary and R=Reinforced

29.2	TABLE: Creepage distances, functional insulation								P
Working voltage (V)	Creepage distance (mm) Pollution degree								
	1	2			3				
		Material group			Material group				
		I	II	IIIa/IIIb	I	II	IIIa/IIIb	Verdict	
≤50	0,2	0,6	0,8	1,1	1,4	1,6	1,8	P	

EN 60335-1								
Clause	Requirement Test				Result - Remark			Verdict

>50 and ≤125	0,3	0,7	1,0	1,4	1,8	2,0	2,2	--
>125 and ≤250	0,4	1,0	1,4	<u>2,0</u>	2,5	2,8	3,2	--
>250 and ≤400	0,8	1,6	2,2	3,2	4,0	4,5	5,0	--
>400 and ≤500	1,0	2,0	2,8	4,0	5,0	5,6	6,3	--
>500 and ≤800	1,8	3,2	4,5	6,3	8,0	9,0	10,0	--
>800 and ≤1000	2,4	4,0	5,6	8,0	10,0	11,0	12,5	--
>1000 and ≤1250	3,2	5,0	7,1	10,0	12,5	14,0	16,0	--
>1250 and ≤1600	4,2	6,3	9,0	12,5	16,0	18,0	20,0	--
>1600 and ≤2000	5,6	8,0	11,0	16,0	20,0	22,0	25,0	--
>2000 and ≤2500	7,5	10,0	14,0	20,0	25,0	28,0	32,0	--
>2500 and ≤3200	10,0	12,5	18,0	25,0	32,0	36,0	40,0	--
>3200 and ≤4000	12,5	16,0	22,0	32,0	40,0	45,0	50,0	--
>4000 and ≤5000	16,0	20,0	28,0	40,0	50,0	56,0	63,0	--
>5000 and ≤6300	20,0	25,0	36,0	50,0	63,0	71,0	80,0	--
>6300 and ≤8000	25,0	32,0	45,0	63,0	80,0	90,0	100,0	--
>8000 and ≤10000	32,0	40,0	56,0	80,0	100,0	110,0	125,0	--
>10000 and ≤12500	40,0	50,0	71,0	100,0	125,0	140,0	160,0	--


EN 60335-1			
Clause	Requirement Test	Result - Remark	Verdict


30.1	TABLE: Ball Pressure Test of Thermoplastics			P
Allowed impression diameter (mm)		2		—
Object/ Part No./ Material	Manufacturer/ trademark	Test temperature (°C)	Impression diameter (mm)	
Plastic enclosure	See Table 24.1	75	1.0	
PCB	See Table 24.1	125	1.0	
Supplementary information:				


30.2	TABLE: Resistance to heat and fire - Glow wire tests							P
Object/ Part No./ Material	Manufacturer/ trademark	Glow wire test (GWT); (°C)						Verdict
		550	650		750		850	
			te	ti	te	ti		
Plastic enclosure	See Table 24.1	No flame	--	--	--	--	--	P
Object/ Part No./ Material	Manufacturer/ trademark	Glow-wire flammability index (GWFI), °C				GW ignition temp. (GWIT), °C		Verdict
		550	650	750	850	675	775	
The test specimen passed the glow wire test (GWT) with no ignition [(te – ti) ≤ 2s] (Yes/No) :								Yes
If no, then surrounding parts passed the needle-flame test of annex E (Yes/No)..... :								N/A
The test specimen passed the test by virtue of most of the flaming material being withdrawn with the glow-wire (Yes/No)?..... :								Yes
Ignition of the specified layer placed underneath the test specimen (Yes/No).....:								No
Supplementary information:								
- 550 °C GWT not relevant (or applicable) to parts of material classified at least HB40 or if relevant HBF								
- The GWIT pre-selection option, the 850 °C GWFI pre-selection option, and the 850 °C GWT are not relevant (or applicable) for attended appliances								


30.2/30.2.4	TABLE: Needle- flame test (NFT)				P
Object/ Part No./ Material	Manufacturer/ trademark	Duration of application of test flame (ta); (s)	Ignition of specified layer Yes/No	Duration of burning (tb) (s)	Verdict
PCB	--	30	No	0	Pass
Supplementary information:					
- NFT not relevant (or applicable) for Parts of material classified as V-0 or V- 1					
- NFT not relevant (or applicable) for Base material of PCBs classified as V-0 or if relevant VTM-0					

Product photo

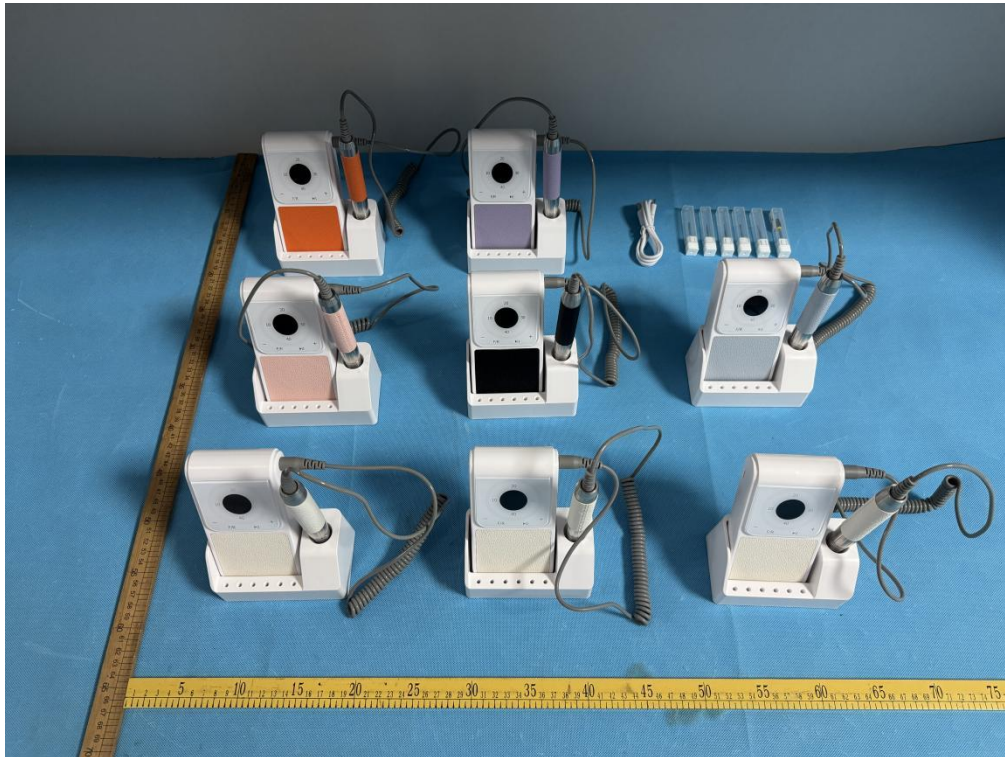

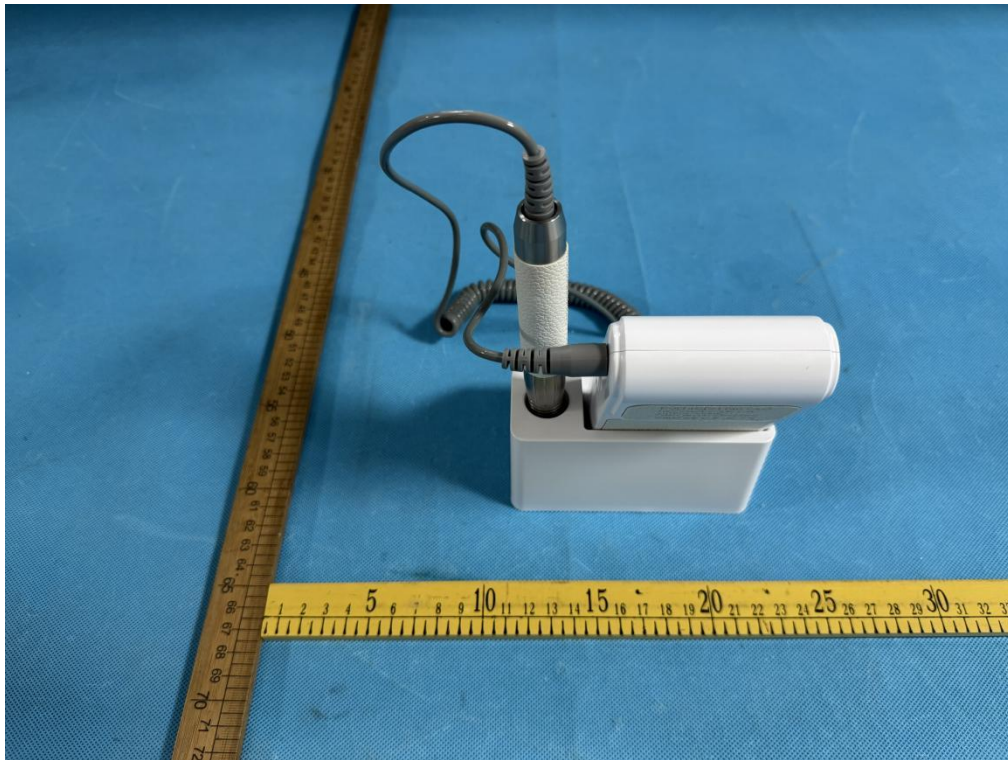

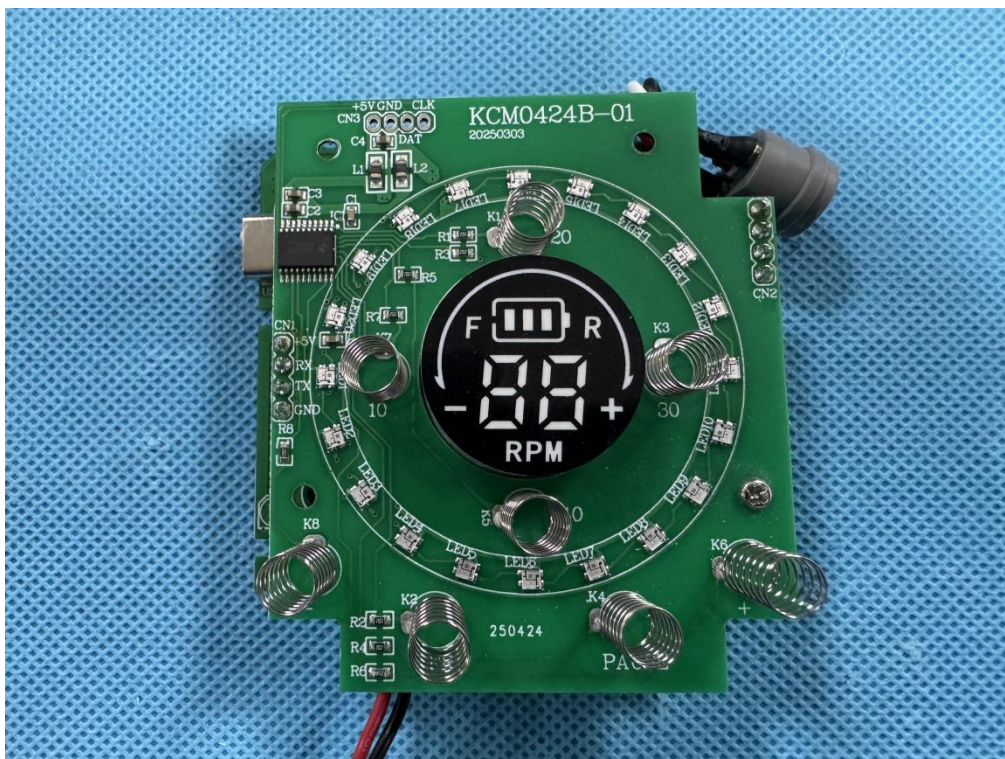

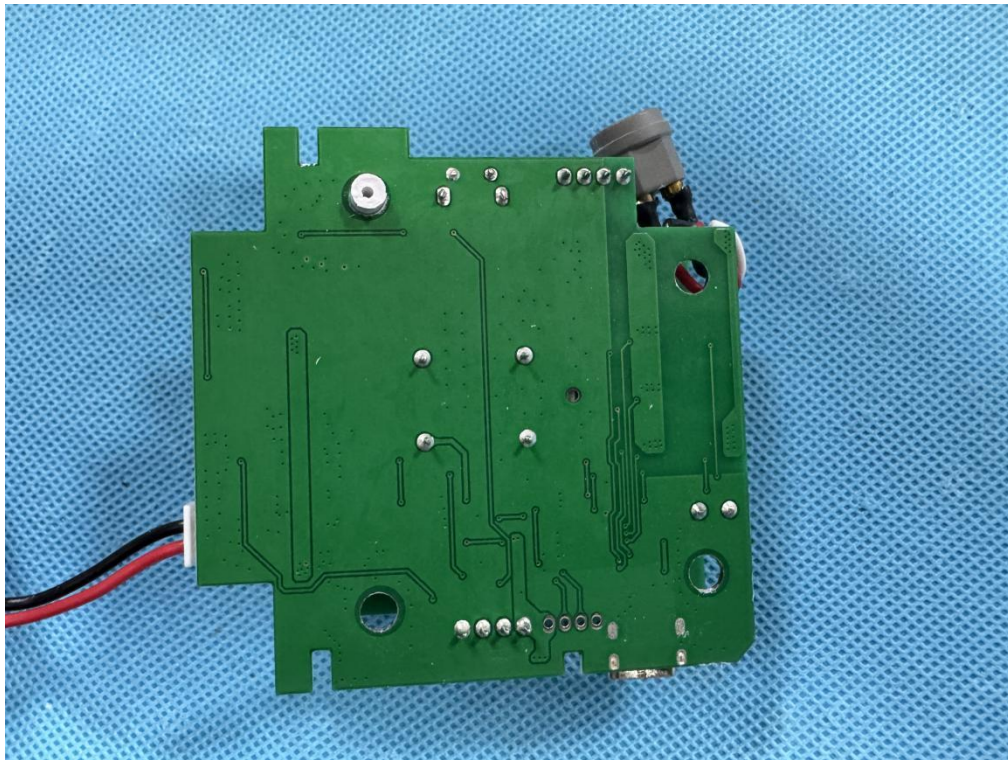

--- End of Report ---