

# Test Report

Report No.: RKEYS260115067

Date: Feb. 02, 2026

Page 1 of 42

## EMC TEST REPORT

For

**Product:Beauty Equipment**

**Model:WKB005.N, F905.N, F826.N, WKB005.N, F833.N, F801C.N, F805.N, F803.N, F834.N, F806.N, F829.N, F808.N, F807A.N, F812.N, F815.N, WKB014, WKB010, WKB017, WKB016, WKB012, WKB015, WKB013, WKB011, F825.N, WKT008, WKT007, F830.N, WKB018, B-333, B-8639C, B-20208D, B-20208E, B-20208F, B-383, B-619K, M-883, M-885, M-879, M-862, M-870, M-857A, M-861, M-872, M-1897A, B-632, B-635, B-632B, B-630A, B-634, B-636, B-639, B-639A, D-669E, B-333F, B-333K, B-333M, B-333G, B-809D, B-809K, B-809M, B-8639C, B-8639E, B-8639F, DR-6826, DR-6827, B-333K, WS-1010K, WS-1068, WS-1078, WS-1079, WS-1088, B-333A, B-809A, M-6897A, WD-8078, F-9902, F-9905, F-9906, F-9907, F-9908, F-9909, F-9910, F-8800D, F-901A, A-9016, B-20205II, B-0610, A-20219, A-20216, A-20218, M-6889, B-809F, DR-048, A-9018F**

**Report No.: RKEYS260115067**

Issued for

**Radium Beauty & Hairdressing Equipment Manufacturer (Guangzhou).**

**102, No.2 Xinlong Industrial South Road, Changyaoling, Zhongluotan Town, Baiyun District, Guangzhou**

Issued by

**Guangdong KEYS Testing Technology Co.,Ltd.**

**Address: Building 1, No.18, Shihuan Road, Dongcheng Subdistrict, Dongguan, Guangdong, China**



Scan to view  
the original file

## TABLE OF CONTENTS

|                                                                 |           |
|-----------------------------------------------------------------|-----------|
| <b>1. TEST CERTIFICATION .....</b>                              | <b>3</b>  |
| <b>2. TEST SUMMARY .....</b>                                    | <b>4</b>  |
| <b>3. TEST SITE .....</b>                                       | <b>5</b>  |
| 3.1. TEST FACILITY .....                                        | 5         |
| 3.2. MEASUREMENT UNCERTAINTY .....                              | 5         |
| 3.3. LIST OF TEST AND MEASUREMENT INSTRUMENTS .....             | 5         |
| <b>4. EUT DESCRIPTION .....</b>                                 | <b>8</b>  |
| <b>5. TEST METHODOLOGY .....</b>                                | <b>9</b>  |
| 5.1. TEST MODE .....                                            | 9         |
| 5.2. EUT SYSTEM OPERATION .....                                 | 9         |
| <b>6. SETUP OF EQUIPMENT UNDER TEST .....</b>                   | <b>10</b> |
| 6.1. DESCRIPTION OF SUPPORT UNITS .....                         | 10        |
| 6.2. CONFIGURATION OF SYSTEM UNDER TEST .....                   | 10        |
| <b>7. EMISSION TEST .....</b>                                   | <b>11</b> |
| 7.1. CONDUCTED EMISSION MEASUREMENT .....                       | 11        |
| 7.2. CLICK MEASUREMENT .....                                    | 15        |
| 7.3. DISTURBANCE POWER MEASUREMENT .....                        | 17        |
| 7.4. RADIATED EMISSION MEASUREMENT .....                        | 18        |
| 7.5. HARMONICS CURRENT MEASUREMENT .....                        | 22        |
| 7.6. VOLTAGE FLUCTUATION AND FLICKS MEASUREMENT .....           | 24        |
| <b>8. IMMUNITY TEST .....</b>                                   | <b>25</b> |
| 8.1. GENERAL DESCRIPTION .....                                  | 25        |
| 8.2. GENERAL PERFORMANCE CRITERIA DESCRIPTION .....             | 26        |
| 8.3. ELECTROSTATIC DISCHARGE (ESD) .....                        | 27        |
| 8.4. RADIATED RADIO-FREQUENCY, ELECTROMAGNETIC FIELD (RS) ..... | 30        |
| 8.5. ELECTRICAL FAST TRANSIENT (EFT) .....                      | 32        |
| 8.6. SURGE IMMUNITY TEST .....                                  | 34        |
| 8.7. CONDUCTED RADIO FREQUENCY DISTURBANCES (CS) .....          | 36        |
| 8.8. VOLTAGE DIP & VOLTAGE INTERRUPTIONS .....                  | 38        |
| <b>9. PHOTOGRAPHS OF EUT .....</b>                              | <b>40</b> |

## 1. TEST CERTIFICATION

Product: Beauty Equipment

Trade mark: /

Model: WKB005.N, F905.N, F826.N, WKB005.N, F833.N, F801C.N, F805.N, F803.N, F834.N, F806.N, F829.N, F808.N, F807A.N, F812.N, F815.N, WKB014, WKB010, WKB017, WKB016, WKB012, WKB015, WKB013, WKB011, F825.N, WKT008, WKT007, F830.N, WKB018, B-333, B-8639C, B-20208D, B-20208E, B-20208F, B-383, B-619K, M-883, M-885, M-879, M-862, M-870, M-857A, M-861, M-872, M-1897A, B-632, B-635, B-632B, B-630A, B-634, B-636, B-639, B-639A, D-669E, B-333F, B-333K, B-333M, B-333G, B-809D, B-809K, B-809M, B-8639C, B-8639E, B-8639F, DR-6826, DR-6827, B-333K, WS-1010K, WS-1068, WS-1078, WS-1079, WS-1088, B-333A, B-809A, M-6897A, WD-8078, F-9902, F-9905, F-9906, F-9907, F-9908, F-9909, F-9910, F-8800D, F-901A, A-9016, B-20205II, B-0610, A-20219, A-20216, A-20218, M-6889, B-809F, DR-048, A-9018F

Applicant: Radium Beauty & Hairdressing Equipment Manufacturer (Guangzhou).

Address: 102, No.2 Xinlong Industrial South Road, Changyaoling, ZhongluotanTown, Baiyun District, Guangzhou

Manufacturer: Radium Beauty & Hairdressing Equipment Manufacturer (Guangzhou).

Address: 102, No.2 Xinlong Industrial South Road, Changyaoling, ZhongluotanTown, Baiyun District, Guangzhou

Sample Received Date: Jan. 15, 2026

Test Date: Jan. 15, 2026 to Jan. 16, 2026

Rating: AC 110-230V~ 50/60Hz, 40W

Applicable Standards: EN IEC 55014-1:2021  
EN IEC 55014-2:2021  
EN IEC 61000-3-2:2019+A2:2024  
EN 61000-3-3:2013+A2:2021+AC:2022-01

Remark: /

The above equipment has been tested by Guangdong KEYS Testing Technology Co., Ltd. and found compliance with the requirements in the technical standards mentioned above. The test results presented in this report only relate to the product/system tested. The Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Prepared by:

Joy Jiang  
Joy Jiang / Engineer

Approved by:

Bruce Zhang  
Bruce Zhang/ Manager

Guangdong KEYS Testing Technology Co., Ltd.

Address: Building 1, No.18, Shihuan Road, Dongcheng Subdistrict, Dongguan, Guangdong, China  
Tel: +86-0769-22221088 <http://www.keys-lab.com> E-mail: [info@keys-lab.com](mailto:info@keys-lab.com)

This report is only responsible for the test results of the samples submitted for inspection, and is not responsible for the source of the samples submitted for inspection.  
This report shall not be altered, increased or deleted. Without written approval of KEYS, this test report shall not be copied except in full and published as advertisement.

## 2. TEST SUMMARY

| EMISSION                                 |                                   |        |                     |
|------------------------------------------|-----------------------------------|--------|---------------------|
| Standard                                 | Item                              | Result | Remarks             |
| EN IEC 55014-1:2021                      | Conducted (Main Port)             | PASS   | Complied with limit |
|                                          | Disturbance Power                 | N/A    | Note 1              |
|                                          | Radiated Emission                 | PASS   | Complied with limit |
|                                          | Click                             | N/A    | Note 3              |
| EN IEC 61000-3-2:2019<br>+A2:2024        | Harmonic current<br>emissions     | N/A    | Note 4              |
| EN 61000-3-3:2013+A2:2021+<br>AC:2022-01 | Voltage fluctuations &<br>flicker | PASS   | Complied with limit |

| IMMUNITY(EN IEC 55014-2:2021)                 |                                      |        |                                   |
|-----------------------------------------------|--------------------------------------|--------|-----------------------------------|
| Standard                                      | Item                                 | Result | Remarks                           |
| IEC 61000-4-2:2008                            | ESD                                  | PASS   | Complied with the<br>requirements |
| IEC<br>61000-4-3:2006/AMD1:2007/<br>AMD2:2010 | RS                                   | N/A    | Note 2                            |
| IEC 61000-4-4:2012                            | EFT                                  | PASS   | Complied with the<br>requirements |
| IEC<br>61000-4-5:2014/AMD1:2017               | Surge                                | PASS   | Complied with the<br>requirements |
| IEC 61000-4-6:2013                            | CS                                   | PASS   | Complied with the<br>requirements |
| IEC 61000-4-11:2020                           | Voltage dips & voltage<br>variations | PASS   | Complied with the<br>requirements |

Note: 1) The Product shall be evaluated for emissions in the 30 MHz to 1 000 MHz range by testing in accordance with method b as described in clause 4.3.4.2 of EN IEC 55014-1.

2) The Product is belong to category II.

3)The EUT is in standby mode while charging which does not cause discontinuous disturbances.

4)The rated power of EUT is less than 75W

### 3. TEST SITE

#### 3.1. TEST FACILITY

Guangdong KEYS Testing Technology Co., Ltd.

Building 1, No.18, Shihuan Road, Dongcheng Subdistrict, Dongguan, Guangdong, China

#### 3.2. MEASUREMENT UNCERTAINTY

| Parameter                        | Uncertainty        |
|----------------------------------|--------------------|
| Conducted Emission(150KHz-30MHz) | $\pm 3.2\text{dB}$ |
| Radiated Emission(30MHz-1GHz)    | $\pm 4.7\text{dB}$ |
| Radiated Emission (1GHz-6GHz)    | $\pm 5.1\text{dB}$ |
| Radiated Emission (6GHz-18GHz)   | $\pm 5.1\text{dB}$ |

Note 1: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

#### 3.3. LIST OF TEST AND MEASUREMENT INSTRUMENTS

##### 3.3.1. ☒ For conducted emission at the mains terminals test

| Equipment         | Manufacturer  | Model                 | Equipment No. | Last Cal.     | Cal. Interval |
|-------------------|---------------|-----------------------|---------------|---------------|---------------|
| EMI Test Receiver | Rohde&Schwarz | ESCI                  | KEYS-EL-203   | Mar. 03, 2025 | 1 Year        |
| Pulse Limiter     | Rohde&Schwarz | ESH3-Z2               | KEYS-EL-201   | Mar. 03, 2025 | 1 Year        |
| LISN              | Rohde&Schwarz | ENV216                | KEYS-EL-202   | Mar. 03, 2025 | 1 Year        |
| Test software     | Tonscend      | JS32-RE Version 5.0.0 |               |               |               |

##### 3.3.2. ☒ For Radiated Emission Measurement(below 1GHz)

| Equipment                    | Manufacturer  | Model    | Equipment No. | Last Cal.     | Cal. Interval |
|------------------------------|---------------|----------|---------------|---------------|---------------|
| EMI Test Receiver            | Rohde&Schwarz | ESCI7    | KEYS-EL-205   | Mar. 03, 2025 | 1 Year        |
| Logarithmic periodic antenna | Schwarzbeck   | VULB9168 | KEYS-EL-209   | Mar. 06, 2025 | 3 Year        |

|                     |              |                       |             |               |        |
|---------------------|--------------|-----------------------|-------------|---------------|--------|
| Preamplifier        | HP           | 8447F                 | KEYS-EL-210 | Mar. 03, 2025 | 1 Year |
| 3m Anechoic Chamber | Taihe MaoRui | 9*6*6                 | KEYS-EL-234 | Oct. 12, 2024 | 5 Year |
| Test software       | Tonscend     | JS32-RE Version 5.0.0 |             |               |        |

### 3.3.3. ☐ For Discontinuous disturbance (Clicks) test

| Equipment      | Manufacturer | Model    | Equipment No. | Last Cal.    | Cal. Interval |
|----------------|--------------|----------|---------------|--------------|---------------|
| Click analyzer | SCHAFFNER    | DIA1512D | KEYS-EL-281   | Mar.18, 2025 | 1 Year        |

### 3.3.4. ☒ For harmonic current emissions and voltage fluctuations/flicker test

| Equipment                     | Manufacturer           | Model                | Equipment No. | Last Cal.    | Cal. Interval |
|-------------------------------|------------------------|----------------------|---------------|--------------|---------------|
| AC Power Source               | California instruments | 5001i-400            | KEYS-EL-248   | May 17, 2025 | 1 Year        |
| Harmonic and Flicker Analyzer | California instruments | PACS-1               | KEYS-EL-249   | May 17, 2025 | 1 Year        |
| Test software                 | California Instruments | CTS 4 Version 4.32.0 |               |              |               |

### 3.3.5. ☒ For electrostatic discharge immunity test

| Equipment  | Manufacturer | Model      | Equipment No. | Last Cal.     | Cal. Interval |
|------------|--------------|------------|---------------|---------------|---------------|
| ESD Tester | PRIMA        | ESD61002TB | KEYS-EL-215   | Mar. 05, 2025 | 1 Year        |

### 3.3.6. ☐ For RF Electromagnetic Field immunity Test

| Equipment    | Manufacturer | Model             | Equipment No. | Last Cal.    | Cal. Interval |
|--------------|--------------|-------------------|---------------|--------------|---------------|
| Amplifier    | Micotop      | MPA-80-1000-250   | KEYS-EL-258   | May 17, 2025 | 1 Year        |
| Amplifier    | Micotop      | MPA-1000-6000-100 | KEYS-EL-259   | May 19, 2025 | 1 Year        |
| Power Meter  | Agilent      | E4417A            | KEYS-EL-260   | May 17, 2025 | 1 Year        |
| Power Sensor | Agilent      | E9304A            | KEYS-EL-261   | May 17, 2025 | 1 Year        |
| Power Sensor | Agilent      | E9304A            | KEYS-EL-262   | May 17, 2025 | 1 Year        |

|                           |               |                |             |              |        |
|---------------------------|---------------|----------------|-------------|--------------|--------|
| Signal Generator          | ROHDE&SCHWARZ | SMB100A        | KEYS-EL-263 | May 17, 2025 | 1 Year |
| Log-Per-Broadband Antenna | SKET          | STLP 9129 PLUS | KEYS-EL-264 | May 19, 2025 | 3 Year |

### 3.3.7. ☒ For electrical fast transient/burst immunity test

| Equipment                      | Manufacturer | Model      | Equipment No. | Last Cal.     | Cal. Interval |
|--------------------------------|--------------|------------|---------------|---------------|---------------|
| Fast Transient Burst Simulator | PRIMA        | EFT61004TA | KEYS-EL-218   | Mar. 03, 2025 | 1 Year        |
| Clamp                          | PRIMA        | PEFT-C105  | KEYS-EL-219   | Mar. 03, 2025 | 1 Year        |

### 3.3.8. ☒ For surge immunity test

| Equipment                   | Manufacturer | Model           | Equipment No. | Last Cal.     | Cal. Interval |
|-----------------------------|--------------|-----------------|---------------|---------------|---------------|
| Lighting Surge Generator    | PRIMA        | SUG61005TB-2216 | KEYS-EL-217   | Mar. 03, 2025 | 1 Year        |
| Coupling/Decoupling Network | PRIMA        | SUG-CDN-108     | KEYS-EL-216   | Mar. 03, 2025 | 1 Year        |

### 3.3.9. ☒ For injected currents susceptibility test

| Equipment      | Manufacturer | Model     | Equipment No. | Last Cal.    | Cal. Interval |
|----------------|--------------|-----------|---------------|--------------|---------------|
| CS Test system | TESEQ        | NSG4070   | KEYS-EL-255   | May 17, 2025 | 1 Year        |
| 6dB Attenuator | TESEQ        | ATN6075   | KEYS-EL-256   | May 17, 2025 | 1 Year        |
| CDN            | TESEQ        | CDN M016  | KEYS-EL-254   | May 17, 2025 | 1 Year        |
| EM-Clamp       | TESEQ        | KEMZ 801A | KEYS-EL-257   | May 17, 2025 | 1 Year        |

### 3.3.10. ☒ For voltage dips and short interruptions immunity test

| Equipment           | Manufacturer | Model      | Equipment No. | Last Cal.     | Cal. Interval |
|---------------------|--------------|------------|---------------|---------------|---------------|
| Cycle Sag Simulator | PRIMA        | DRP61011TB | KEYS-EL-220   | Mar. 03, 2025 | 1 Year        |

## 4. EUT DESCRIPTION

|                         |                                                                                                                                                                                                    |
|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Product</b>          | Beauty Equipment                                                                                                                                                                                   |
| <b>Main Model</b>       | WKB005.N                                                                                                                                                                                           |
| <b>Supplied Voltage</b> | AC230V, 50Hz                                                                                                                                                                                       |
| <b>Product Category</b> | <input type="checkbox"/> Category I <input checked="" type="checkbox"/> Category II <input type="checkbox"/> Category III <input type="checkbox"/> Category IV <input type="checkbox"/> Category V |
| <b>Accessories:</b>     | /                                                                                                                                                                                                  |

### I/O PORT

| I/O PORT TYPES | Q'TY | TESTED WITH                         |
|----------------|------|-------------------------------------|
| AC Port        | 1    | <input checked="" type="checkbox"/> |
| DC Port        | 1    | <input type="checkbox"/>            |

### Models Difference

All series models are identical, except for model name difference for trading purpose.

## 5. TEST METHODOLOGY

### 5.1. TEST MODE

The EUT was tested together with the thereafter additional components, and a configuration, which produced the worst emission levels, was selected and recorded in this report.

| Test Mode |             |
|-----------|-------------|
| Mode 1    | EUT+Working |

The following test mode(s) were assessed.

| Test Items |                                | Test Mode |
|------------|--------------------------------|-----------|
| Emission   | Conducted Emission             | Mode 1    |
|            | Radiated Emission              | Mode 1    |
|            | Click                          | N/A       |
|            | Harmonic current emissions     | N/A       |
|            | Voltage fluctuations & flicker | Mode 1    |
| Immunity   | ESD                            | Mode 1    |
|            | EFT                            | Mode 1    |
|            | Surge                          | Mode 1    |
|            | C/S                            | Mode 1    |
|            | Dips                           | Mode 1    |

### 5.2. EUT SYSTEM OPERATION

1. Set up EUT with the support equipment.
2. Make sure the EUT work normally during the test.

## 6. SETUP OF EQUIPMENT UNDER TEST

### 6.1. DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| No. | Equipment | Model | Serial No. | Trade Name | Data Cable | Power Cord |
|-----|-----------|-------|------------|------------|------------|------------|
| 1.  | /         | /     | /          | /          | /          | /          |

Note: 1) All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.

2) Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

### 6.2. CONFIGURATION OF SYSTEM UNDER TEST



(EUT: Beauty Equipment)

## 7. EMISSION TEST

### 7.1. CONDUCTED EMISSION MEASUREMENT

#### 7.1.1. LIMITS

Household appliances and equipment causing similar disturbances  
and regulation controls incorporation semiconductor devices

| FREQUENCY  | At mains terminals       |                       | At load terminals and additional terminals |                       |
|------------|--------------------------|-----------------------|--------------------------------------------|-----------------------|
| (MHz)      | Quasi-peak<br>dB $\mu$ V | Average<br>dB $\mu$ V | Quasi-peak<br>dB $\mu$ V                   | Average<br>dB $\mu$ V |
| 0.15 - 0.5 | 66-56                    | 59-46                 | 80                                         | 70                    |
| 0.5 - 5.0  | 56                       | 46                    | 74                                         | 64                    |
| 5.0 - 30.0 | 60                       | 50                    | 74                                         | 64                    |

Mains terminals of tools

| FREQUENCY   | Rated motor power not<br>exceeding 700W |                       | Rated motor power above<br>700W and not exceeding<br>1000W |                       | Rated motor power above 1000W |                       |
|-------------|-----------------------------------------|-----------------------|------------------------------------------------------------|-----------------------|-------------------------------|-----------------------|
| (MHz)       | Quasi-peak<br>dB $\mu$ V                | Average<br>dB $\mu$ V | Quasi-peak<br>dB $\mu$ V                                   | Average<br>dB $\mu$ V | Quasi-peak<br>dB $\mu$ V      | Average<br>dB $\mu$ V |
| 0.15 - 0.35 | 66-59                                   | 59-49                 | 70-63                                                      | 63-53                 | 79-69                         | 69-59                 |
| 0.35 - 5.0  | 59                                      | 49                    | 63                                                         | 53                    | 69                            | 59                    |
| 5.0 - 30.0  | 64                                      | 54                    | 68                                                         | 58                    | 74                            | 64                    |

Note: 1) The lower limit shall apply at the transition frequencies.

2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 MHz to 0.5 MHz


#### 7.1.2. TEST PROCEDURES

The EUT and Support equipment, if needed, was set up as per the test configuration to simulate typical usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane. When the EUT is floor standing equipment, it is placed on the ground plane, which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane. The EUT should be 0.8 m apart from the AMN, where the mains cable supplied by the manufacturer is longer than 0.8 m, the excess should be folded at the centre into a bundle no longer than 0.4 m, Details please refer to test setup photography.

The Receiver scanned from 9 kHz to 30 MHz for emissions in each of the test modes.  
During the above scans, the emissions were maximized by cable manipulation.

A scanning was taken on the power lines, Line and neutral, recording at least six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. The test data of the worst-case condition(s) was recorded.

### 7.1.3.TEST SETUP

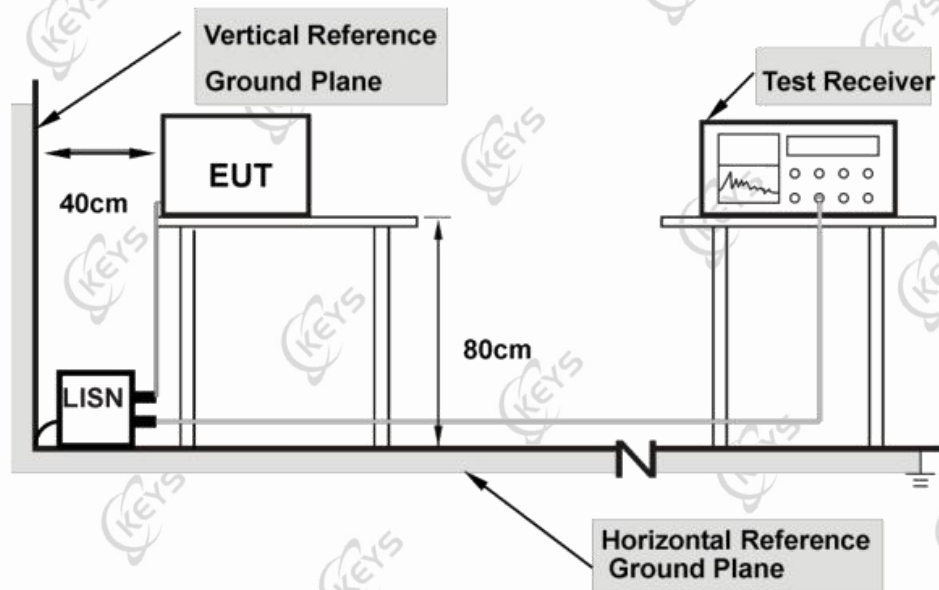

Note: 1.Support units were connected to second LISN.


2.Both of LISNs(AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

### 7.1.4.TEST RESULT

|                     |                  |                            |           |
|---------------------|------------------|----------------------------|-----------|
| <b>Product name</b> | Beauty Equipment | <b>Test voltage:</b>       | 230V/50Hz |
| <b>Model</b>        | WKB005.N         | <b>Temperature:</b>        | 22.5°C    |
| <b>Test Mode</b>    | Mode 1           | <b>Relative Humidity :</b> | 57 % RH   |

Please refer to the following diagram:

Line:

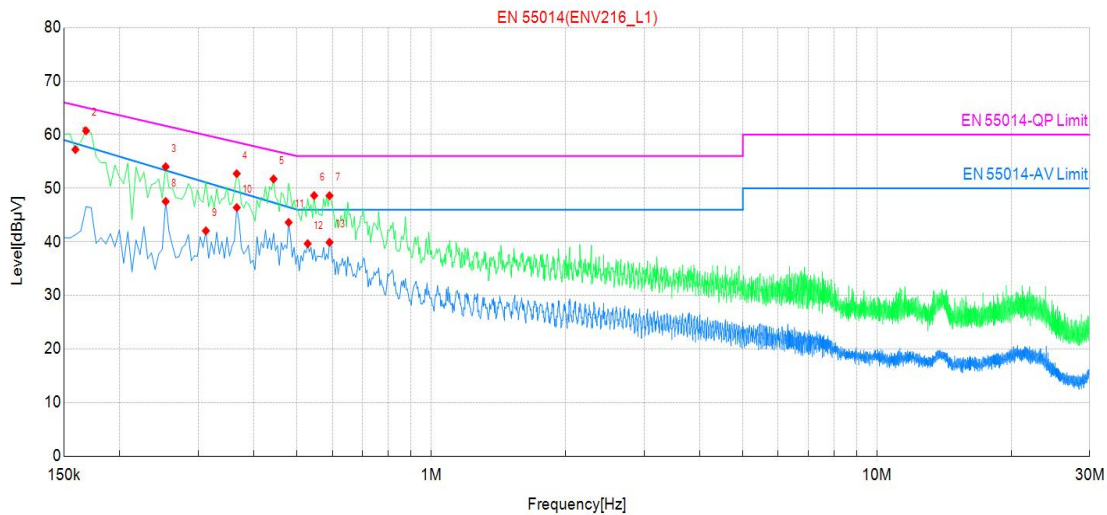


| Suspected Data List |                 |                |              |             |              |             |       |          |         |
|---------------------|-----------------|----------------|--------------|-------------|--------------|-------------|-------|----------|---------|
| NO.                 | Frequency [MHz] | Reading [dBμV] | Level [dBμV] | Factor [dB] | Limit [dBμV] | Margin [dB] | Phase | Detector | Verdict |
| 1                   | 0.159000        | 37.95          | 57.22        | 19.27       | 65.62        | 8.40        | L1    | QP       | PASS    |
| 2                   | 0.168000        | 41.47          | 60.72        | 19.25       | 65.08        | 4.36        | L1    | QP       | PASS    |
| 3                   | 0.253500        | 34.85          | 54.02        | 19.17       | 61.71        | 7.69        | L1    | QP       | PASS    |
| 4                   | 0.366000        | 33.59          | 52.72        | 19.13       | 58.65        | 5.93        | L1    | QP       | PASS    |
| 5                   | 0.442500        | 32.62          | 51.73        | 19.11       | 57.05        | 5.32        | L1    | QP       | PASS    |
| 6                   | 0.546000        | 29.50          | 48.64        | 19.14       | 56.00        | 7.36        | L1    | QP       | PASS    |
| 7                   | 0.591000        | 29.43          | 48.61        | 19.18       | 56.00        | 7.39        | L1    | QP       | PASS    |
| 8                   | 0.253500        | 28.36          | 47.53        | 19.17       | 53.42        | 5.89        | L1    | AV       | PASS    |
| 9                   | 0.312000        | 22.90          | 42.05        | 19.15       | 51.13        | 9.08        | L1    | AV       | PASS    |
| 10                  | 0.366000        | 27.27          | 46.40        | 19.13       | 49.44        | 3.04        | L1    | AV       | PASS    |
| 11                  | 0.478500        | 24.52          | 43.62        | 19.10       | 46.54        | 2.92        | L1    | AV       | PASS    |
| 12                  | 0.528000        | 20.53          | 39.65        | 19.12       | 46.00        | 6.35        | L1    | AV       | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Neutral:

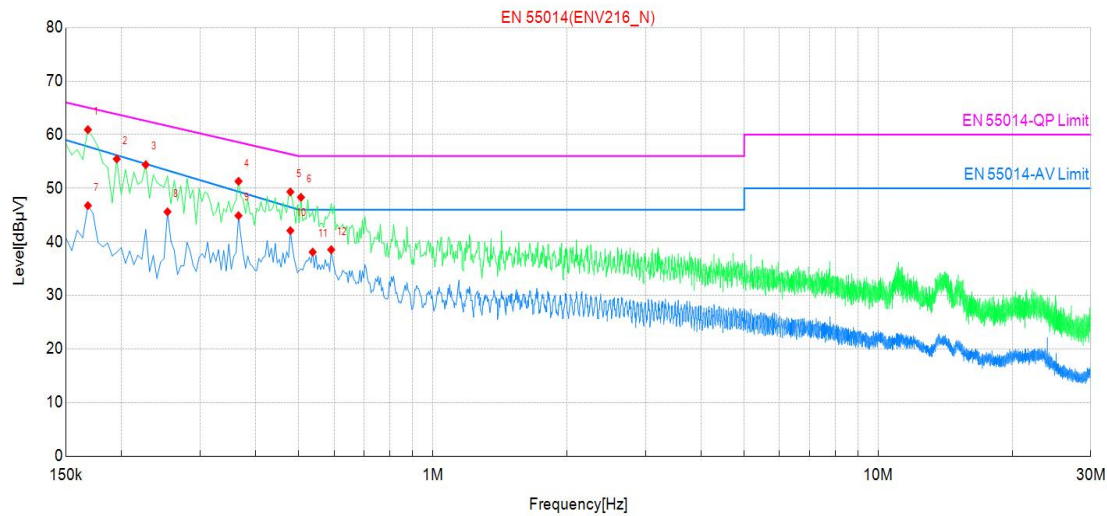

### Suspected Data List

| NO. | Frequency [MHz] | Reading [dBμV] | Level [dBμV] | Factor [dB] | Limit [dBμV] | Margin [dB] | Phase | Detector | Verdict |
|-----|-----------------|----------------|--------------|-------------|--------------|-------------|-------|----------|---------|
| 1   | 0.168000        | 41.74          | 60.93        | 19.19       | 65.08        | 4.15        | N     | QP       | PASS    |
| 2   | 0.195000        | 36.28          | 55.47        | 19.19       | 63.95        | 8.48        | N     | QP       | PASS    |
| 3   | 0.226500        | 35.21          | 54.40        | 19.19       | 62.69        | 8.29        | N     | QP       | PASS    |
| 4   | 0.366000        | 32.11          | 51.30        | 19.19       | 58.65        | 7.35        | N     | QP       | PASS    |
| 5   | 0.478500        | 30.13          | 49.32        | 19.19       | 56.42        | 7.10        | N     | QP       | PASS    |
| 6   | 0.505500        | 29.12          | 48.31        | 19.19       | 56.00        | 7.69        | N     | QP       | PASS    |
| 7   | 0.168000        | 27.57          | 46.76        | 19.19       | 57.81        | 11.05       | N     | AV       | PASS    |
| 8   | 0.253500        | 26.41          | 45.60        | 19.19       | 53.42        | 7.82        | N     | AV       | PASS    |
| 9   | 0.366000        | 25.69          | 44.88        | 19.19       | 49.44        | 4.56        | N     | AV       | PASS    |
| 10  | 0.478500        | 22.90          | 42.09        | 19.19       | 46.54        | 4.45        | N     | AV       | PASS    |
| 11  | 0.537000        | 18.87          | 38.08        | 19.21       | 46.00        | 7.92        | N     | AV       | PASS    |
| 12  | 0.591000        | 19.29          | 38.53        | 19.24       | 46.00        | 7.47        | N     | AV       | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

## 7.2. CLICK MEASUREMENT

### 7.2.1. LIMITS

The click limit  $L_q$  is determined from the formula:

$$L_q = L + \Delta L$$

which the limits  $L$  for continuous disturbance shall be increased (see table 1):

which corresponding to the click rate  $N$  shall be calculated the amount  $\Delta L$  by

$$\Delta L = 44 \text{ dB for } N < 0,2$$

$$\Delta L = [20 \log(30/N)] \text{ dB for } 0,2 \leq N < 30$$

Table 1

| FREQUENCY<br>(MHz) | At mains terminals       |                       | At load terminals and additional terminals |                       |
|--------------------|--------------------------|-----------------------|--------------------------------------------|-----------------------|
|                    | Quasi-peak<br>dB $\mu$ V | Average<br>dB $\mu$ V | Quasi-peak<br>dB $\mu$ V                   | Average<br>dB $\mu$ V |
| 0.15 - 0.5         | 66-56                    | 59-46                 | 80                                         | 70                    |
| 0.5 - 5.0          | 56                       | 46                    | 74                                         | 64                    |
| 5.0 - 30.0         | 60                       | 50                    | 74                                         | 64                    |

### 7.2.2. TEST PROCEDURE


The EUT and Support equipment, if needed, was set up as per the test configuration to simulate typical usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane. When the EUT is floor standing equipment, it is placed on the ground plane, which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane. The EUT should be 0.8 m apart from the AMN, where the mains cable supplied by the manufacturer is longer than 1m, the excess should be folded at the centre into a bundle no longer than 0.4 m, Details please refer to test setup photography.

At first, determining  $N$  by measuring the Clicks, calculating the limit.

Then, use the Upper quartile method to confirm EUT is fulfilled the requirement of standard or not.

The amplitude of the clicks shall be evaluated only at the following restricted number of frequencies: 150 kHz; 500 kHz; 1.4 MHz and 30 MHz

### 7.2.3. TEST SETUP

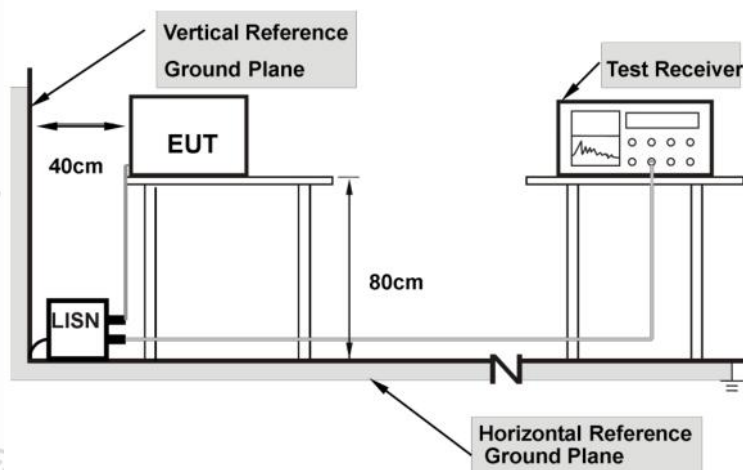

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration

**7.2.4. TEST RESULT**

Not applicable.

## 7.3. DISTURBANCE POWER MEASUREMENT

### 7.3.1. LIMITS

| FREQUENCY<br>(MHz) | Household appliances and similar appliances |              | Rated motor power not exceeding 700W |              | Rated motor power above 700W and not exceeding 1000W |              | Rated motor power above 1000W |              |
|--------------------|---------------------------------------------|--------------|--------------------------------------|--------------|------------------------------------------------------|--------------|-------------------------------|--------------|
|                    | QP dBpW                                     | Average dBpW | QP dBpW                              | Average dBpW | QP dBpW                                              | Average dBpW | QP dBpW                       | Average dBpW |
| 30 ~ 300           | 45-55                                       | 35-45        | 45-55                                | 35-45        | 49-59                                                | 39-49        | 55-65                         | 45-55        |

Note: 1) The lower limit shall apply at the transition frequencies.

2) Increasing linearly with the frequency.

3) QP means Quasi-peak, AV means Average.

4) The limit of column 2 and 3 apply to this product.

### 7.3.2. TEST PROCEDURE


The EUT is placed on a 0.8 meters height wooden table above the ground plane, and kept at least 0.8 m from other metallic object. The straight portion of lead would put on 6 m long testing bench of (if lead is shorter than 6 m it should be extended)

Any lead connecting the main appliance to an auxiliary apparatus is disconnected if this does not affect the operation of the appliance, or is isolated by means of ferrite rings (or an absorbing clamp) close to the appliance.

The receiver scanned from 30 MHz to 300 MHz. Emissions were scanned and measured to moving the absorbing clamp along the main lead until the maximum emission value is found. Recorded at least the six highest emissions.

The test data of the worst-case condition(s) was recorded.

### 7.3.3. TEST SETUP

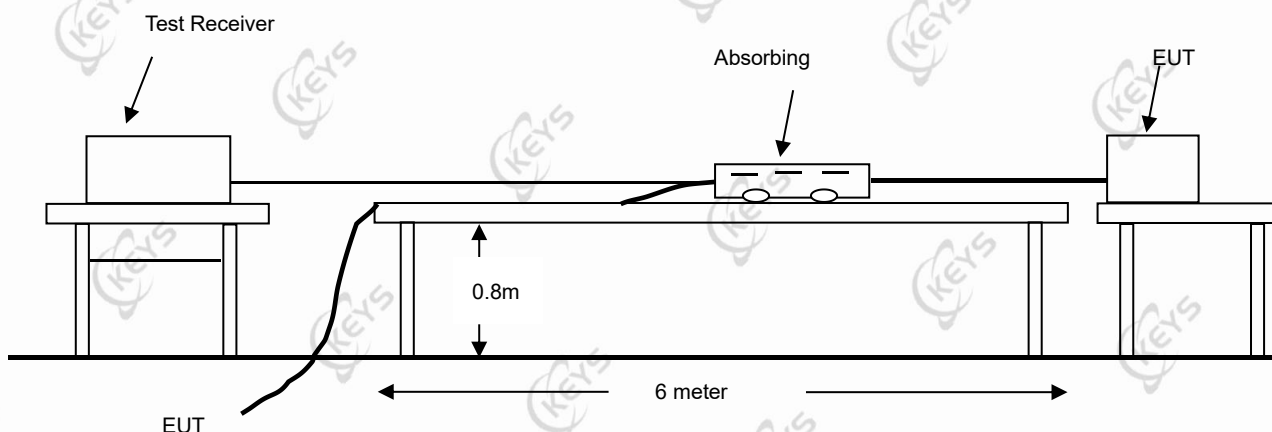

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration

### 7.3.4. TEST RESULT

Not applicable.

## 7.4. RADIATED EMISSION MEASUREMENT

### 7.4.1. LIMITS

| FREQUENCY (MHz) | Limit (dBμV/m) (At 3m) |
|-----------------|------------------------|
| 30 ~ 230        | 40                     |
| 230 ~ 1000      | 47                     |

Note: 1) The lower limit shall apply at the transition frequencies.

2) Emission level (dBμV/m) = 20 log Emission level (μV/m).

### 7.4.2. TEST PROCEDURE

The equipment was set up as per the test configuration to simulate typical usage per the user's manual. When the EUT is a tabletop system, a wooden turntable with a height of 0.8 meters is used which is placed on the ground plane. When the EUT is floor standing equipment, it is placed on the ground plane which has a 0.1 m non-conductive covering to insulate the EUT from the ground plane.


The antenna was placed at 3 meter away from the EUT. The antenna connected to the spectrum analyzer via a cable and at times a pre-amplifier would be used.

The analyzer / receiver quickly scanned from 30 MHz to 1000 MHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.

During the above scans, the emissions were maximized by cable manipulation. Each modes is measured, recorded at least the six highest emissions. The emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit and only Q.P. reading is presented.

The test data of the worst-case condition(s) was recorded.

### 7.4.3.TEST SETUP

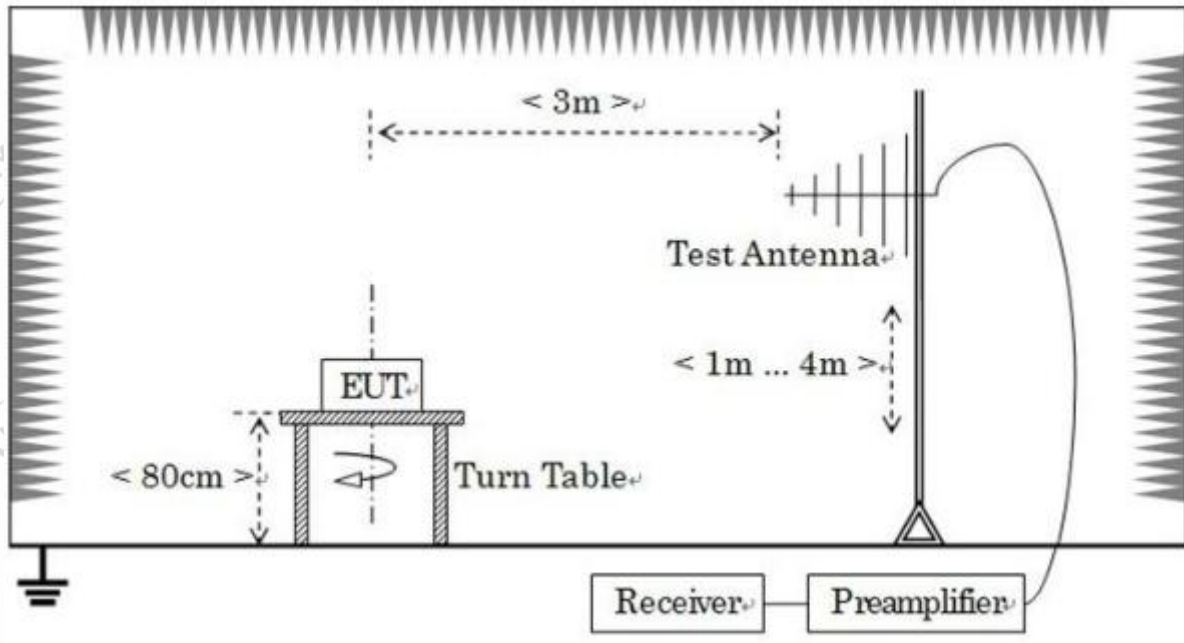


Note: For the actual test configuration, please refer to the related item – Photographs of the Test Configuration

### 7.4.4.TEST RESULT

|                     |                  |                            |           |
|---------------------|------------------|----------------------------|-----------|
| <b>Product name</b> | Beauty Equipment | <b>Test voltage:</b>       | 230V/50Hz |
| <b>Model</b>        | WKB005.N         | <b>Temperature:</b>        | 22.1°C    |
| <b>Test Mode</b>    | Mode 1           | <b>Relative Humidity :</b> | 54 % RH   |

Please refer to the following diagram:

Vertical:

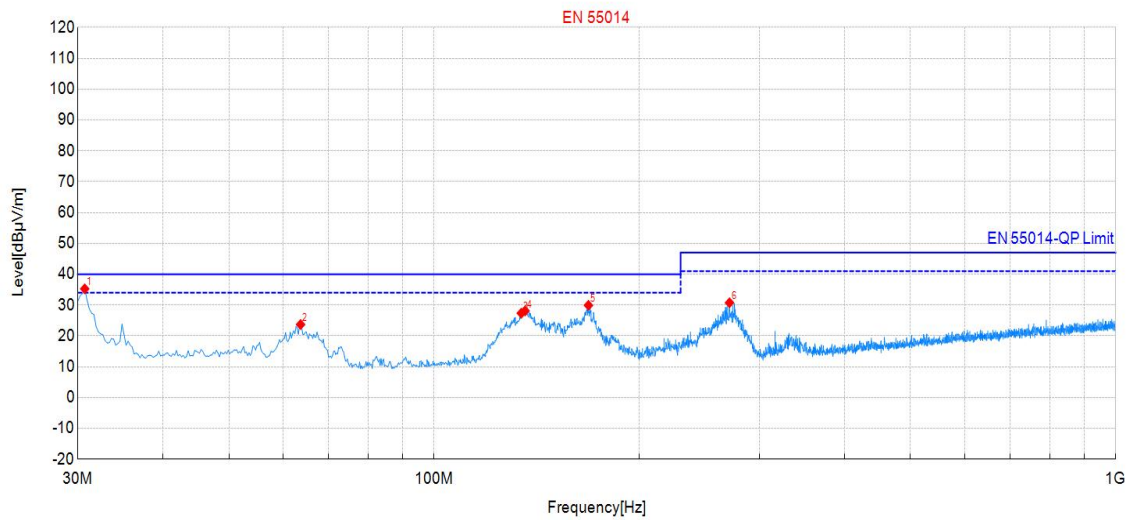


| Suspected Data List |                 |                |                |               |                |             |             |           |     |      |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-------------|-----------|-----|------|---------|
| NO.                 | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Det | Pol  | Verdict |
| 1                   | 30.73           | 53.01          | 35.27          | -17.74        | 40.00          | 4.73        | 100         | 1         | QP  | Vert | PASS    |
| 2                   | 63.71           | 42.29          | 23.69          | -18.60        | 40.00          | 16.31       | 100         | 129       | QP  | Vert | PASS    |
| 3                   | 134.28          | 44.12          | 27.35          | -16.77        | 40.00          | 12.65       | 100         | 82        | QP  | Vert | PASS    |
| 4                   | 135.97          | 44.76          | 28.11          | -16.65        | 40.00          | 11.89       | 100         | 90        | QP  | Vert | PASS    |
| 5                   | 168.47          | 46.97          | 29.91          | -17.06        | 40.00          | 10.09       | 100         | 129       | QP  | Vert | PASS    |
| 6                   | 271.29          | 48.28          | 30.74          | -17.54        | 47.00          | 16.26       | 100         | 214       | QP  | Vert | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Horizontal:

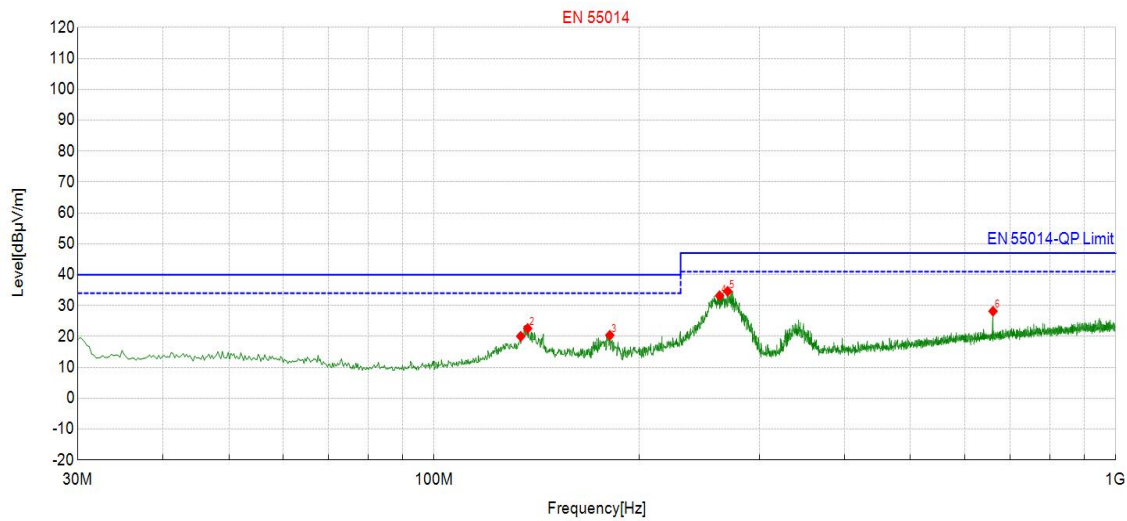

## Suspected Data List

| NO. | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Det | Pol  | Verdict |
|-----|-----------------|----------------|----------------|---------------|----------------|-------------|-------------|-----------|-----|------|---------|
| 1   | 134.03          | 36.85          | 20.06          | -16.79        | 40.00          | 19.94       | 100         | 54        | QP  | Hori | PASS    |
| 2   | 137.19          | 39.16          | 22.59          | -16.57        | 40.00          | 17.41       | 100         | 94        | QP  | Hori | PASS    |
| 3   | 181.08          | 38.94          | 20.40          | -18.54        | 40.00          | 19.60       | 100         | 73        | QP  | Hori | PASS    |
| 4   | 262.32          | 51.03          | 33.19          | -17.84        | 47.00          | 13.81       | 100         | 270       | QP  | Hori | PASS    |
| 5   | 269.59          | 52.24          | 34.64          | -17.60        | 47.00          | 12.36       | 100         | 262       | QP  | Hori | PASS    |
| 6   | 660.74          | 37.49          | 28.18          | -9.31         | 47.00          | 18.82       | 100         | 28        | QP  | Hori | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

## 7.5. HARMONICS CURRENT MEASUREMENT

### 7.5.1. LIMITS OF HARMONICS CURRENT MEASUREMENT

| Limit for Class A equipment |                                      | Limit for Class D equipment                 |                                                  |                                      |
|-----------------------------|--------------------------------------|---------------------------------------------|--------------------------------------------------|--------------------------------------|
| Harmonics Order N           | Max. permissible harmonics current A | Harmonics Order n                           | Max. permissible harmonics current per watt mA/W | Max. permissible harmonics current A |
| Odd harmonics               |                                      | Odd Harmonics only                          |                                                  |                                      |
| 3                           | 2.30                                 | 3                                           | 3.4                                              | 2.30                                 |
| 5                           | 1.14                                 | 5                                           | 1.9                                              | 1.14                                 |
| 7                           | 0.77                                 | 7                                           | 1.0                                              | 0.77                                 |
| 9                           | 0.40                                 | 9                                           | 0.5                                              | 0.40                                 |
| 11                          | 0.33                                 | 11                                          | 0.35                                             | 0.33                                 |
| 13                          | 0.21                                 | 13                                          | 0.30                                             | 0.21                                 |
| $15 \leq n \leq 39$         | $0.15 \times (15/n)$                 | $15 \leq n \leq 39$<br>(odd harmonics only) | $3.85/n$                                         | $0.15 \times (15/n)$                 |
| Even harmonics              |                                      |                                             |                                                  |                                      |
| 2                           | 1.08                                 |                                             |                                                  |                                      |
| 4                           | 0.43                                 |                                             |                                                  |                                      |
| 6                           | 0.30                                 |                                             |                                                  |                                      |
| $8 \leq n \leq 40$          | $0.23 \times 8/n$                    |                                             |                                                  |                                      |

| Limit for Class C equipment                 |                                                                                                                  |
|---------------------------------------------|------------------------------------------------------------------------------------------------------------------|
| Harmonics Order n                           | Max. permissible harmonics current expressed as a percentage of the input current at the fundamental frequency A |
| 2                                           | 2                                                                                                                |
| 3                                           | $30 \times F$                                                                                                    |
| 5                                           | 10                                                                                                               |
| 7                                           | 7                                                                                                                |
| 9                                           | 5                                                                                                                |
| $11 \leq n \leq 39$<br>(odd harmonics only) | 3                                                                                                                |
| F is the circuit power factor               |                                                                                                                  |

### 7.5.2. TEST PROCEDURES

The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the

maximum harmonic. The classification of EUT is according to section 5 of EN 61000-3-2.

The EUT is classified as follows:

Class A:

Balanced three-phase equipment, Household appliances excluding equipment as Class D, Tools excluding portable tools, Dimmers for incandescent lamps, audio equipment, equipment not specified in one of the three other classes.

Class B:

Portable tools; Arc welding equipment which is not professional equipment.

Class C:


Lighting equipment

Class D:

Equipment having a specified power less than or equal to 600 W of the following types: Personal computers and personal computer monitors and television receivers.

The correspondent test program of test instrument to measure the current harmonics emanated from EUT is chosen. The measure time shall be not less than the time necessary for the EUT to be exercised.

### 7.5.3. TEST SETUP

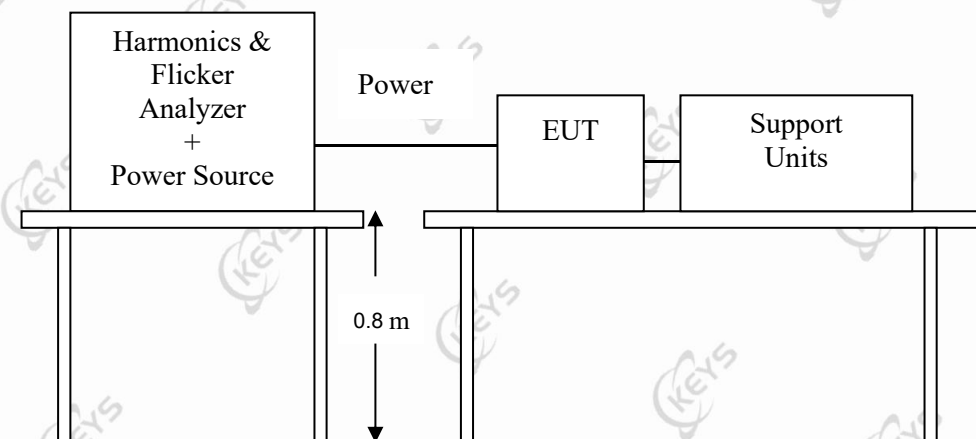

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

### 7.5.4. TEST RESULT

Not Applicable

## 7.6. VOLTAGE FLUCTUATION AND FLICKS MEASUREMENT

### 7.6.1. LIMITS OF VOLTAGE FLUCTUATION AND FLICKS MEASUREMENT


| TEST ITEM     | LIMIT   | REMARK                                             |
|---------------|---------|----------------------------------------------------|
| $P_{st}$      | 1.0     | $P_{st}$ means short-term flicker indicator.       |
| $P_{lt}$      | 0.65    | $P_{lt}$ means long-term flicker indicator.        |
| $T_{dt}$ (ms) | 500     | $T_{dt}$ means maximum time that $dt$ exceeds 3 %. |
| $d_{max}$ (%) | 4/6/7 % | $d_{max}$ means maximum relative voltage change.   |
| dc (%)        | 3.3 %   | dc means relative steady-state voltage change      |

### 7.6.2. TEST PROCEDURE

The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the most unfavorable sequence of voltage changes under lighting operating conditions.

During the flick measurement, the measure time shall include that part of whole operation cycle in which the EUT produce the most unfavorable sequence of voltage changes. The observation period for short-term flicker indicator is 10 minutes and the observation period for long-term flicker indicator is 2 hours.

### 7.6.3. TEST SETUP

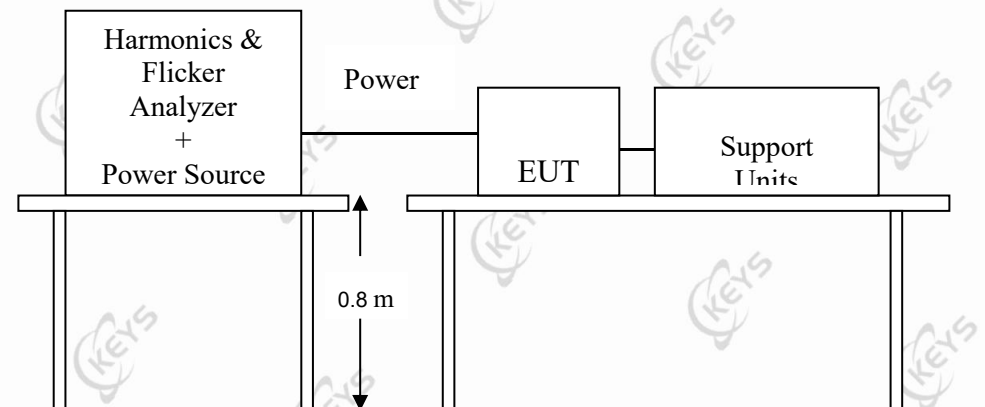

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

### 7.6.4. TEST RESULT

|                         |                  |                     |           |
|-------------------------|------------------|---------------------|-----------|
| Product name            | Beauty Equipment | Test voltage:       | 230V/50Hz |
| Model                   | WKB005.N         | Temperature:        | 23.6°C    |
| Test Mode               | Mode 1           | Relative Humidity : | 53% RH    |
| Observation Period (Tp) | 10min            | RESULT              | PASS      |

## 8. IMMUNITY TEST

### 8.1. GENERAL DESCRIPTION

| Product Standard                                                         | EN IEC 55014-2 |                                                                                                                                                                                                                          |
|--------------------------------------------------------------------------|----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                          | Test Type      | Minimum Requirement                                                                                                                                                                                                      |
| <b>Basic Standard, Specification, and Performance Criterion required</b> | IEC 61000-4-2  | Electrostatic Discharge – ESD:<br>±8 kV air discharge, ±4 kV Contact discharge,<br>Performance Criterion B                                                                                                               |
|                                                                          | IEC 61000-4-3  | Radio-Frequency Electromagnetic Field Susceptibility Test – RS:<br>80 MHz to 1 GHz, 3 V/m, 80 % AM(1 kHz),<br>Performance Criterion A                                                                                    |
|                                                                          | IEC 61000-4-4  | Electrical Fast Transient/Burst - EFT,<br>Power line: ±1kV, Signal line: ±0.5kV,<br>Performance Criterion B                                                                                                              |
|                                                                          | IEC 61000-4-5  | Surge Immunity Test:<br>1.2/50 µs Open Circuit Voltage,<br>8 /20 µs Short Circuit Current,<br>Power Port ~ Line to line: ±1 kV,<br>Line to ground: ±2 kV<br>Signal and Control Port : ±0.5 kV<br>Performance Criterion B |
|                                                                          | IEC 61000-4-6  | Conducted Radio Frequency Disturbances Test –CS:<br>0.15 ~ 230MHz, 3 Vrms, 80 % AM, 1 kHz,<br>Performance Criterion A                                                                                                    |
|                                                                          | IEC 61000-4-11 | Voltage Dips and Interruptions:<br>i) 30 % reduction for 10 period,<br>Performance Criterion C<br>ii) 100 % reduction for 0.5 period<br>Performance Criterion B                                                          |

## 8.2. GENERAL PERFORMANCE CRITERIA DESCRIPTION

|                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Criteria A:</b> | The apparatus shall continue to operate as intended during the test. No degradation of performance or loss of function is allowed below a performance level (or permissible loss of performance) specified by the manufacturer, when the apparatus is used as intended. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and from what the user may reasonably expect from the apparatus if used as intended.                                                                                                                                |
| <b>Criteria B:</b> | The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level (or permissible loss of performance) specified by the manufacturer, when the apparatus is used as intended. During the test, degradation of performance is allowed, however, no change of actual operating state or stored data is allowed. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and from what the user may reasonably expect from the apparatus if used as intended. |
| <b>Criteria C:</b> | Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of the controls, or by any operation specified in the instructions for use.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

### 8.3. ELECTROSTATIC DISCHARGE (ESD)

#### 8.3.1. TEST SPECIFICATION

|                               |                                                                                       |
|-------------------------------|---------------------------------------------------------------------------------------|
| <b>Basic Standard:</b>        | IEC 61000-4-2                                                                         |
| <b>Discharge Impedance:</b>   | 330 $\Omega$                                                                          |
| <b>Charging Capacity:</b>     | 150 pF                                                                                |
| <b>Discharge Voltage:</b>     | Air Discharge: $\pm 8$ kV (Direct)<br>Contact Discharge: $\pm 4$ kV (Direct/Indirect) |
| <b>Polarity:</b>              | Positive & Negative                                                                   |
| <b>Number of Discharge:</b>   | 10 times at each test point                                                           |
| <b>Discharge Mode:</b>        | 1 time/s                                                                              |
| <b>Performance Criterion:</b> | B                                                                                     |

#### 8.3.2. TEST PROCEDURE

The discharges shall be applied in two ways:

- Contact discharges to the conductive surfaces and coupling planes:  
Twenty dischargers (10 with positive and 10 with negative polarity) shall be applied on each accessible metallic part of the enclosure, terminals are excluded. In case of a non-conductive enclosure, dischargers shall be applied on the horizontal or vertical coupling planes. Test shall be performed at a maximum repetition rate of one discharge per second.
- Air discharges at slots and apertures and insulating surfaces:  
On those parts of the EUT where it is not possible to perform contact discharge testing, the equipment should be investigated to identify user accessible points where breakdown may occur. Such points are tested using the air discharge method. This investigation should be restricted to those area normally handled by the user. A minimum of 10 single air discharges shall be applied to the selected test point for each such area.

The basic test procedure was in accordance with IEC 61000-4-2:


- The EUT was located 0.1 m minimum from all side of the HCP (dimensions 1.6 m x 0.8 m).
- The support units were located another table 30 cm away from the EUT, but direct support unit was/were located at same location as EUT on the HCP and keep at a distance of 10cm with EUT.
- The time interval between two successive single discharges was at least 1 second.
- Contact discharges were applied to the non-insulating coating, with the pointed tip of the generator penetrating the coating and contacting the conducting substrate.
- Air discharges were applied with the round discharge tip of the discharge electrode approaching the EUT as fast as possible (without causing mechanical damage) to touch the EUT. After each

discharge, the ESD generator was removed from the EUT and re-triggered for a new single discharge. The test was repeated until all discharges were complete.

f) At least ten single discharges (in the most sensitive polarity) were applied at the front edge of each HCP opposite the center point of each unit of the EUT and 0.1 meters from the front of the EUT. The long axis of the discharge electrode was in the plane of the HCP and perpendicular to its front edge during the discharge.

g) At least ten single discharges (in the most sensitive polarity) were applied to the center of one vertical edge of the Vertical Coupling Plane (VCP) in sufficiently different positions that the four faces of the EUT were completely illuminated. The VCP (dimensions 0.5 m x 0.5 m) was placed vertically to and 0.1 meters from the EUT.

### 8.3.3. TEST SETUP

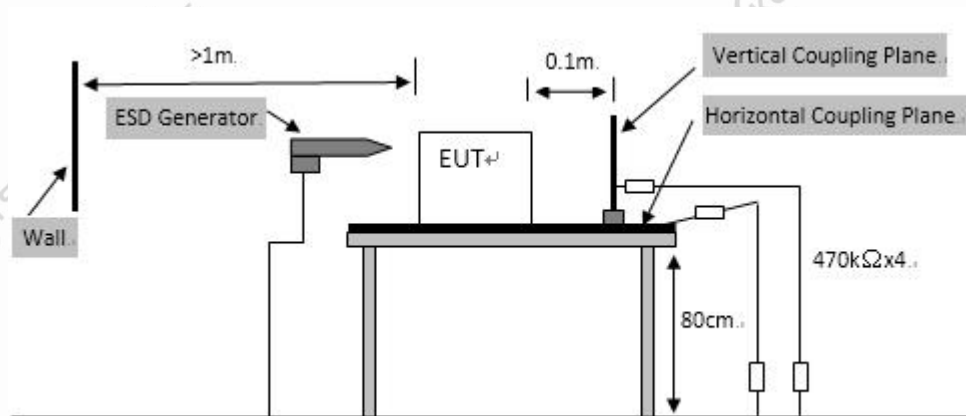

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

Note:

#### 1) TABLE-TOP EQUIPMENT

The configuration consisted of a wooden table 0.8 meters high standing on the ground reference plane (GRP). The GRP consisted of a sheet of aluminum at least 0.25 mm thick, and 2.5 meters square connected to the protective grounding system. A horizontal coupling plane (HCP) (1.6 m x 0.8 m) was placed on the table and attached to the GRP by means of a cable with 940k total impedance. The equipment under test, was installed in a representative system as described in section 7 of IEC 61000-4-2, and its cables were placed on the HCP and isolated by an insulating support of 0.5 mm thickness. A distance of 1-meter minimum was provided between the EUT and the walls of the laboratory and any other metallic structure.

#### 2) FLOOR-STANDING EQUIPMENT

The equipment under test was installed in a representative system as described in section 7 of IEC 61000-4-2, and its cables were isolated from the ground reference plane by an insulating support of 0.1 meter thickness. The GRP consisted of a sheet of aluminum that is at least 0.25 mm thick, and 2.5 meters square connected to the protective grounding system and extended at least 0.5 meters from the EUT on all sides.

### 8.3.4. TEST RESULT

|                     |                  |                            |           |
|---------------------|------------------|----------------------------|-----------|
| <b>Product name</b> | Beauty Equipment | <b>Test voltage:</b>       | 230V/50Hz |
| <b>Model</b>        | WKB005.N         | <b>Temperature:</b>        | 24.2°C    |
| <b>Test Mode</b>    | Mode 1           | <b>Relative Humidity :</b> | 54 % RH   |

| Discharge Type                                                                                                               | Level (kV) | Test Point | Observation                                                                                      | Performance Criterion |
|------------------------------------------------------------------------------------------------------------------------------|------------|------------|--------------------------------------------------------------------------------------------------|-----------------------|
| Contact Discharge                                                                                                            | ± 4        | 2          | Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3 | A                     |
| Direct Air Discharge                                                                                                         | ± 8        | 1          | Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3 | A                     |
| Indirect Discharge (HCP)                                                                                                     | ± 4        | 3          | Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3 | A                     |
| Indirect Discharge (VCP)                                                                                                     | ± 4        | 3          | Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3 | A                     |
| <b>Test point:</b><br>1. All insulated enclosure and seams.<br>2. All accessible metal parts of the enclosure<br>3. All side |            |            |                                                                                                  |                       |

**Note:**

- 1) The EUT shall continue to operate as intended during and after the test.
- 2) The EUT shall continue to operate as intended after the test.
- 3) Temporary loss of function is allowed during the test, provided the function is self-recoverable or can be restored by the operation of the controls

## 8.4. RADIATED RADIO-FREQUENCY, ELECTROMAGNETIC FIELD (RS)

### 8.4.1. TEST SPECIFICATION


|                               |                                      |
|-------------------------------|--------------------------------------|
| <b>Basic Standard:</b>        | IEC 61000-4-3                        |
| <b>Frequency Range:</b>       | 80 MHz ~ 1000 MHz                    |
| <b>Field Strength:</b>        | 3 V/m                                |
| <b>Modulation:</b>            | 1 kHz Sine Wave, 80 %, AM Modulation |
| <b>Frequency Step:</b>        | 1 % of preceding frequency value     |
| <b>Polarity of Antenna:</b>   | Horizontal and Vertical              |
| <b>Test Distance:</b>         | 3 m                                  |
| <b>Antenna Height:</b>        | 1.5 m                                |
| <b>Performance Criterion:</b> | A                                    |

### 8.4.2. TEST PROCEDURE

The test procedure was in accordance with IEC 61000-4-3

- The testing was performed in a fully anechoic chamber. The transmit antenna was located at a distance of 3 meters from the EUT.
- The frequency range is swept from 80 MHz to 1000 MHz, with the signal 80% amplitude modulated with a 1 kHz sine-wave. The rate of sweep did not exceed  $1.5 \times 10^{-3}$  decade/s, where the frequency range is swept incrementally, the step size was 1 % of preceding frequency value.
- The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond.
- The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.

### 8.4.3. TEST SETUP

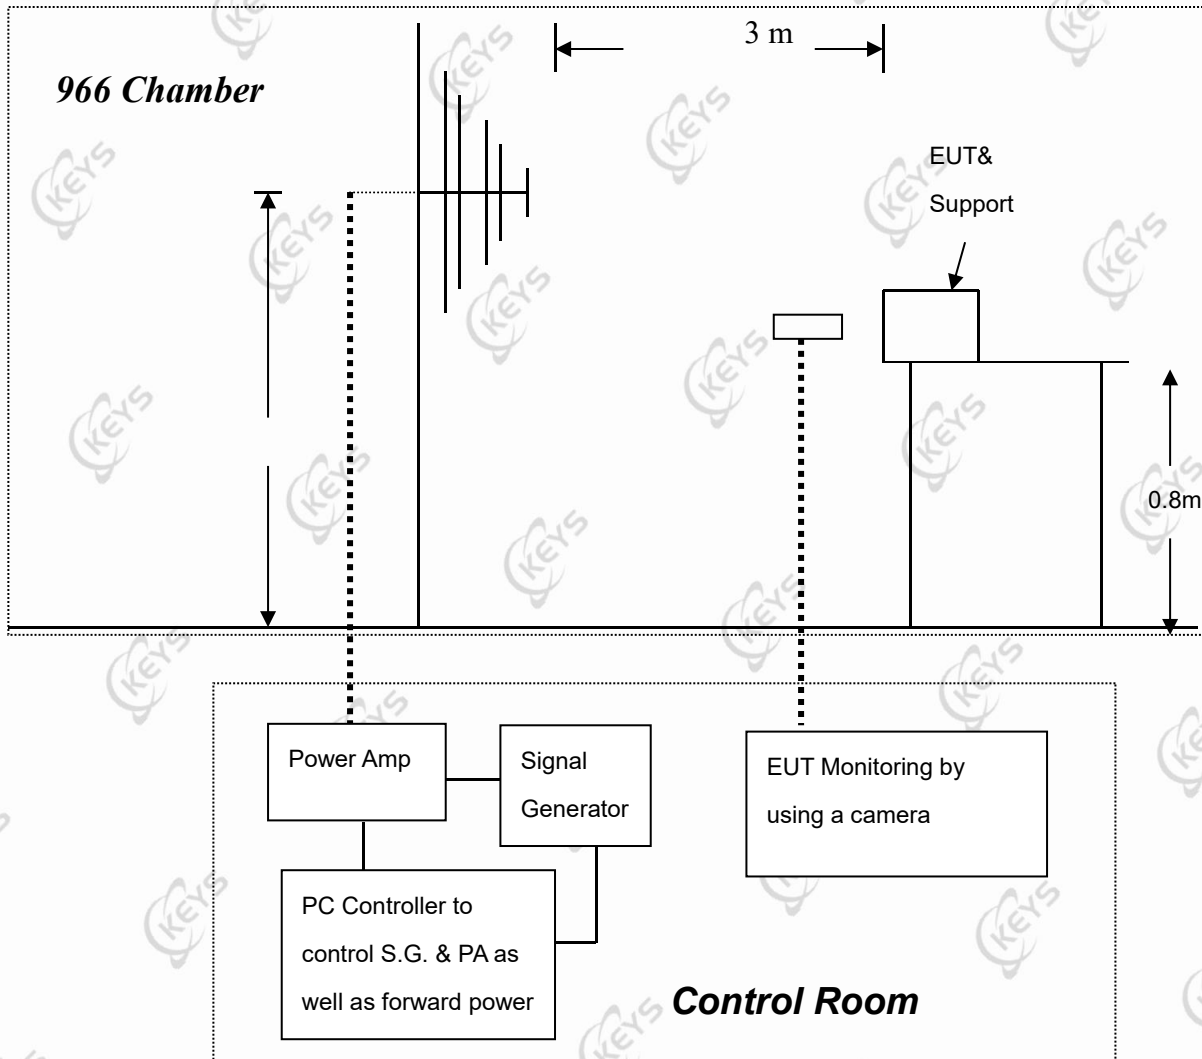

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

Note:

#### TABLETOP EQUIPMENT

The EUT installed in a representative system as described in section 7 of EN 61000-4-3 was placed on a non-conductive table 0.8 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.

#### FLOOR STANDING EQUIPMENT

The EUT installed in a representative system as described in section 7 of IEC 61000-4-3 was placed on a non-conductive wood support 0.1 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.

### 8.4.4. TEST RESULT

Not applicable.

## 8.5. ELECTRICAL FAST TRANSIENT (EFT)

### 8.5.1. TEST SPECIFICATION

|                               |                                                             |
|-------------------------------|-------------------------------------------------------------|
| <b>Basic Standard:</b>        | IEC 61000-4-4                                               |
| <b>Test Voltage:</b>          | Power Line: $\pm 1$ kV<br>Signal/Control Line: $\pm 0.5$ kV |
| <b>Polarity:</b>              | Positive & Negative                                         |
| <b>Impulse Frequency:</b>     | 5 kHz                                                       |
| <b>Impulse Wave-shape:</b>    | 5/50 ns                                                     |
| <b>Burst Duration:</b>        | 15 ms                                                       |
| <b>Burst Period:</b>          | 300 ms                                                      |
| <b>Test Duration:</b>         | 2 mins                                                      |
| <b>Performance Criterion:</b> | B                                                           |


### 8.5.2. TEST PROCEDURE

EUT is placed on a 0.1 m (table type equipment) / 0.8 m (floor type equipment) tall wooden table.

EUT operate at normal mode, the transient/burst was 5/50 ns in accordance with IEC 61000-4-4, both positive and negative polarity burst waveform were applied.

The duration time of each test line was 2 minutes.

### 8.5.3. TEST SETUP

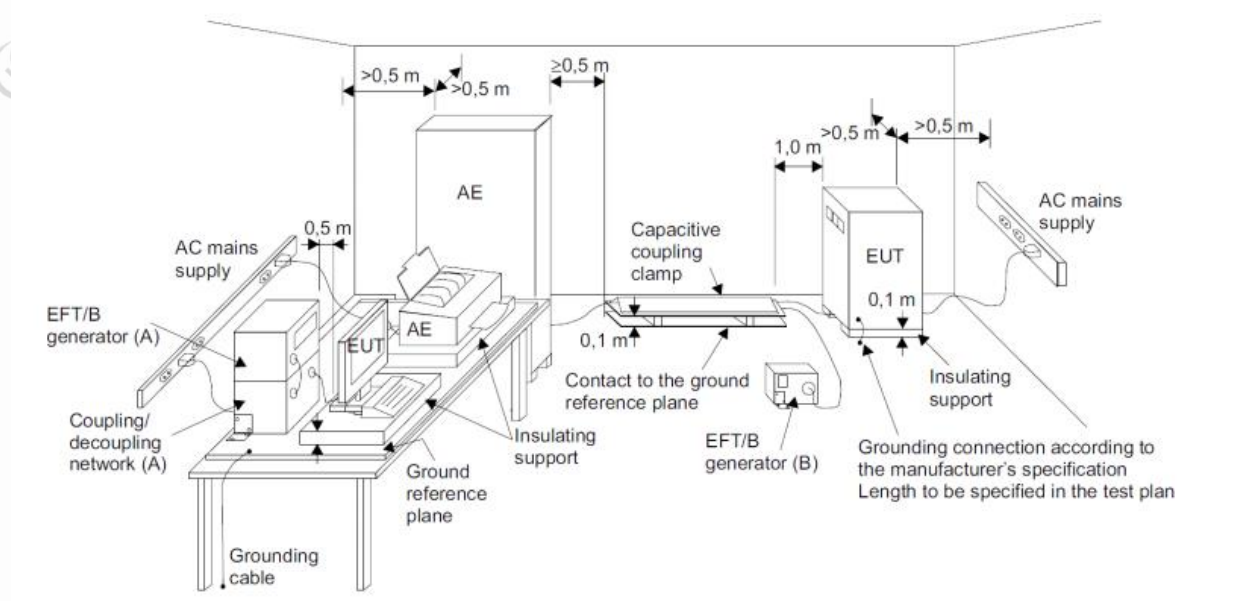

For the actual test configuration, please refer to the related item – photographs of the test configuration.

#### 8.5.4. TEST RESULT

|                     |                  |                            |           |
|---------------------|------------------|----------------------------|-----------|
| <b>Product name</b> | Beauty Equipment | <b>Test voltage:</b>       | 230V/50Hz |
| <b>Model</b>        | WKB005.N         | <b>Temperature:</b>        | 23.7°C    |
| <b>Test Mode</b>    | Mode 1           | <b>Relative Humidity :</b> | 54% RH    |

| Test Point     | Polarity | Test Level (kV) | Observation                                                                                      | Performance Criterion |
|----------------|----------|-----------------|--------------------------------------------------------------------------------------------------|-----------------------|
| L              | +/-      | 1               | Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3 | A                     |
| N              | +/-      | 1               | Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3 | A                     |
| L – N          | +/-      | 1               | Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3 | A                     |
| PE             | +/-      | 1               | Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3 | A                     |
| L – PE         | +/-      | 1               | Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3 | A                     |
| N – PE         | +/-      | 1               | Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3 | A                     |
| L – N – PE     | +/-      | 1               | Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3 | A                     |
| RJ45 UTP cable | --       | --              | --                                                                                               | --                    |

Note:

- 1) The EUT shall continue to operate as intended during and after the test.
- 2) The EUT shall continue to operate as intended after the test.
- 3) Temporary loss of function is allowed during the test, provided the function is self-recoverable or can be restored by the operation of the controls

## 8.6. SURGE IMMUNITY TEST

### 8.6.1. TEST SPECIFICATION

|                                    |                                                                                                       |
|------------------------------------|-------------------------------------------------------------------------------------------------------|
| <b>Basic Standard:</b>             | IEC 61000-4-5                                                                                         |
| <b>Wave-Shape:</b>                 | Combination Wave<br>1.2/50 $\mu$ s Open Circuit Voltage<br>8/20 $\mu$ s Short Circuit Current         |
| <b>Test Voltage:</b>               | Power Port ~ Line to line: $\pm 1$ kV, Line to ground: $\pm 2$ kV                                     |
| <b>Surge Input/Output:</b>         | Power Line: L-N / L-PE / N-PE                                                                         |
| <b>Generator Source Impedance:</b> | 2 $\Omega$ between networks<br>12 $\Omega$ between network and ground                                 |
| <b>Polarity:</b>                   | Positive/Negative                                                                                     |
| <b>Phase Angle:</b>                | 90°(positive polarity pulses) / 270°(negative polarity pulses)                                        |
| <b>Pulse Repetition Rate:</b>      | 1 time / min                                                                                          |
| <b>Number of Tests:</b>            | 5 positive polarity pulses at the 90° phase angle, and 5 negative polarity pulses at 270° phase angle |
| <b>Performance Criterion:</b>      | B                                                                                                     |


### 8.6.2. TEST PROCEDURE

EUT is placed on a 0.1 m (table type equipment) / 0.8 m (floor type equipment) tall wooden table.

EUT operate at normal mode, two types of combination wave generator (1.2/50  $\mu$ s open-circuit voltage and 8/20  $\mu$ s short-circuit current) are applied to the EUT power supply terminals via the capacitive coupling network.

The power cord between the EUT and the coupling/decoupling network shall not exceed 2 m in length.

### 8.6.3. TEST SETUP

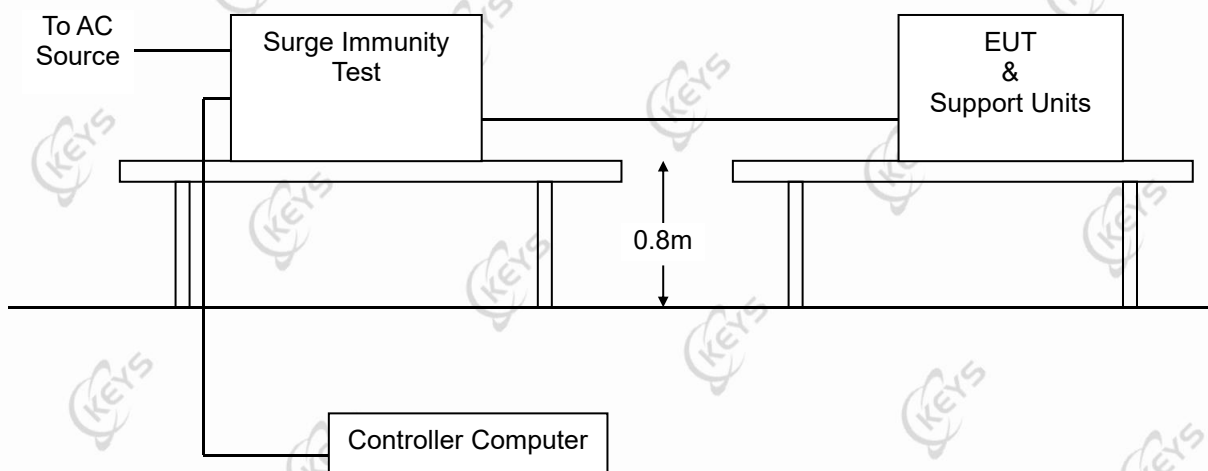

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

### 8.6.4. TEST RESULT

|                     |                  |                            |           |
|---------------------|------------------|----------------------------|-----------|
| <b>Product name</b> | Beauty Equipment | <b>Test voltage:</b>       | 230V/50Hz |
| <b>Model</b>        | WKB005.N         | <b>Temperature:</b>        | 23.4°C    |
| <b>Test Mode</b>    | Mode 1           | <b>Relative Humidity :</b> | 57% RH    |

| Test Point | Polarity | Test Level (kV) | Observation                                                                                      | Performance Criterion |
|------------|----------|-----------------|--------------------------------------------------------------------------------------------------|-----------------------|
| L - N      | +/-      | 1               | Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3 | A                     |
| L - PE     | +/-      | 2               | Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3 | A                     |
| N - PE     | +/-      | 2               | Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3 | A                     |

Note:

- 1) The EUT shall continue to operate as intended during and after the test.
- 2) The EUT shall continue to operate as intended after the test.
- 3) Temporary loss of function is allowed during the test, provided the function is self-recoverable or can be restored by the operation of the controls

## 8.7. CONDUCTED RADIO FREQUENCY DISTURBANCES (CS)

### 8.7.1. TEST SPECIFICATION

|                               |                                      |
|-------------------------------|--------------------------------------|
| <b>Basic Standard:</b>        | IEC 61000-4-6                        |
| <b>Frequency Range:</b>       | 0.15 MHz ~230 MHz                    |
| <b>Field Strength:</b>        | 3 V                                  |
| <b>Modulation:</b>            | 1 kHz Sine Wave, 80 %, AM Modulation |
| <b>Frequency Step:</b>        | 1 % of preceding frequency value     |
| <b>Coupled cable:</b>         | Power Mains, Shielded                |
| <b>Coupling device:</b>       | CDN-M3/2 (3 wires/2 wires)           |
| <b>Performance Criterion:</b> | A                                    |


### 8.7.2. TEST PROCEDURE

The EUT shall be tested within its intended operating and climatic conditions.

The test shall be performed with the test generator connected to each of the coupling and decoupling devices in turn, while the other non-excited RF input ports of the coupling devices are terminated by a 50  $\Omega$  load resistor.

The frequency range was swept from 150 kHz to 230 MHz, using the signal level established during the setting process and with a disturbance signal of 80 % amplitude. The signal was modulated with a 1 kHz sine wave, pausing to adjust the RF signal level or the switch coupling devices as necessary. The sweep rate was  $1.5 \times 10^{-3}$  decades/s. Where the frequency range is swept incrementally, the step size was 1 % of preceding frequency value the dwell time of the amplitude modulated carrier at each frequency was 0.5 s.

### 8.7.3. TEST SETUP

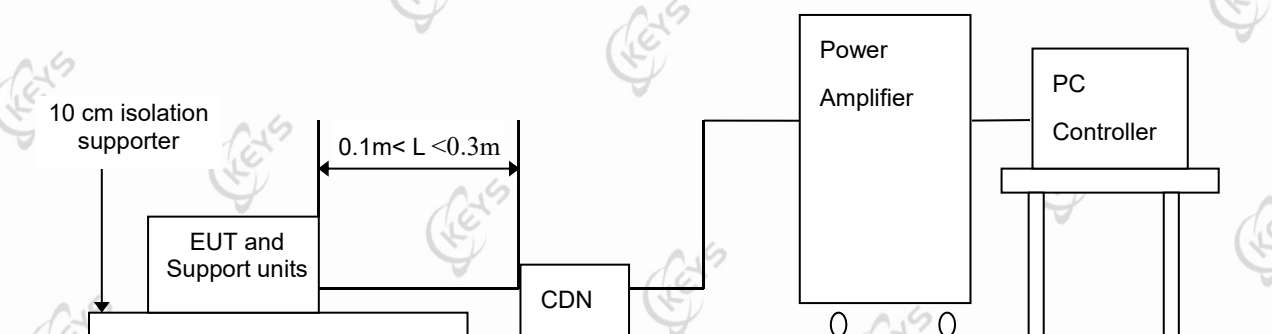

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration

Note: 1) The EUT is setup 0.1 m above Ground Reference Plane

2) All relevant cables shall be provided with the appropriate coupling and decoupling devices at a distance between 0.1 meters and 0.3 meters from the projected geometry of the EUT on the ground reference plane.

#### 8.7.4. TEST RESULT

|                     |                  |                            |           |
|---------------------|------------------|----------------------------|-----------|
| <b>Product name</b> | Beauty Equipment | <b>Test voltage:</b>       | 230V/50Hz |
| <b>Model</b>        | WKB005.N         | <b>Temperature:</b>        | 22.1°C    |
| <b>Test Mode</b>    | Mode 1           | <b>Relative Humidity :</b> | 55% RH    |

| Frequency (MHz) | Field Strength (Vrms) | Injected Position | Injection Method | Observation                                                                                      | Performance Criterion |
|-----------------|-----------------------|-------------------|------------------|--------------------------------------------------------------------------------------------------|-----------------------|
| 0.15 ~ 230      | 3                     | AC Mains          | CDN-M3           | Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3 | A                     |

Note:

- 1) The EUT shall continue to operate as intended during and after the test.
- 2) The EUT shall continue to operate as intended after the test.
- 3) Temporary loss of function is allowed during the test, provided the function is self-recoverable or can be restored by the operation of the controls

## 8.8. VOLTAGE DIP & VOLTAGE INTERRUPTIONS

### 8.8.1. TEST SPECIFICATION

|                                |                           |
|--------------------------------|---------------------------|
| <b>Basic Standard:</b>         | IEC 61000-4-11            |
| <b>Test Duration Time:</b>     | 3 test events in sequence |
| <b>Interval Between Event:</b> | 10 seconds                |
| <b>Phase Angle:</b>            | 0°                        |
| <b>Test Cycle:</b>             | 3 times                   |
| <b>Performance Criterion:</b>  | C                         |

### 8.8.2. TEST PROCEDURE


The EUT and support units were located on a wooden table, 0.8 m away from ground floor.

Setting the parameter of tests and then perform the test software of test simulator.

Changes to the voltage level shall occur at 0 degree crossing point in the a.c. voltage waveform.

Record the test result in test record form.

### 8.8.3. TEST SETUP

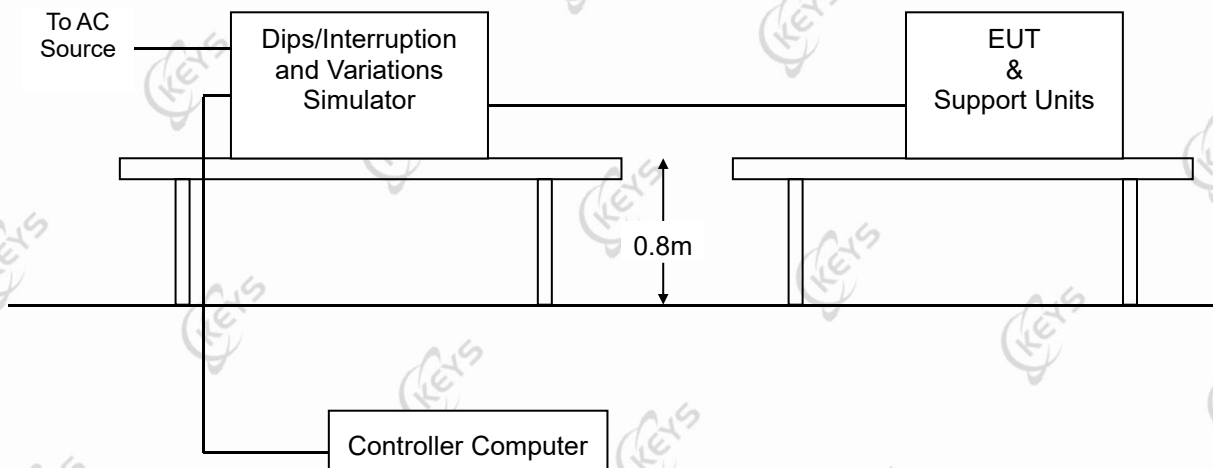

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 8.8.4. TEST RESULT


|                     |                  |                            |           |
|---------------------|------------------|----------------------------|-----------|
| <b>Product name</b> | Beauty Equipment | <b>Test voltage:</b>       | 230V/50Hz |
| <b>Model</b>        | WKB005.N         | <b>Temperature:</b>        | 22.1°C    |
| <b>Test Mode</b>    | Mode 1           | <b>Relative Humidity :</b> | 54% RH    |


| Test Power: 230 Vac, 50 Hz |                      |                                                                                                  |                          |
|----------------------------|----------------------|--------------------------------------------------------------------------------------------------|--------------------------|
| Voltage<br>(% Reduction)   | Duration<br>(Period) | Observation                                                                                      | Performance<br>Criterion |
| 100                        | 0.5                  | Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3 | A                        |
| 60                         | 10                   | Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3 | A                        |
| 30                         | 25                   | Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3 | A                        |

**Note:**

- 1) The EUT shall continue to operate as intended during and after the test.
- 2) The EUT shall continue to operate as intended after the test.
- 3) Temporary loss of function is allowed during the test, provided the function is self-recoverable or can be restored by the operation of the controls

## 9. PHOTOGRAPHS OF EUT

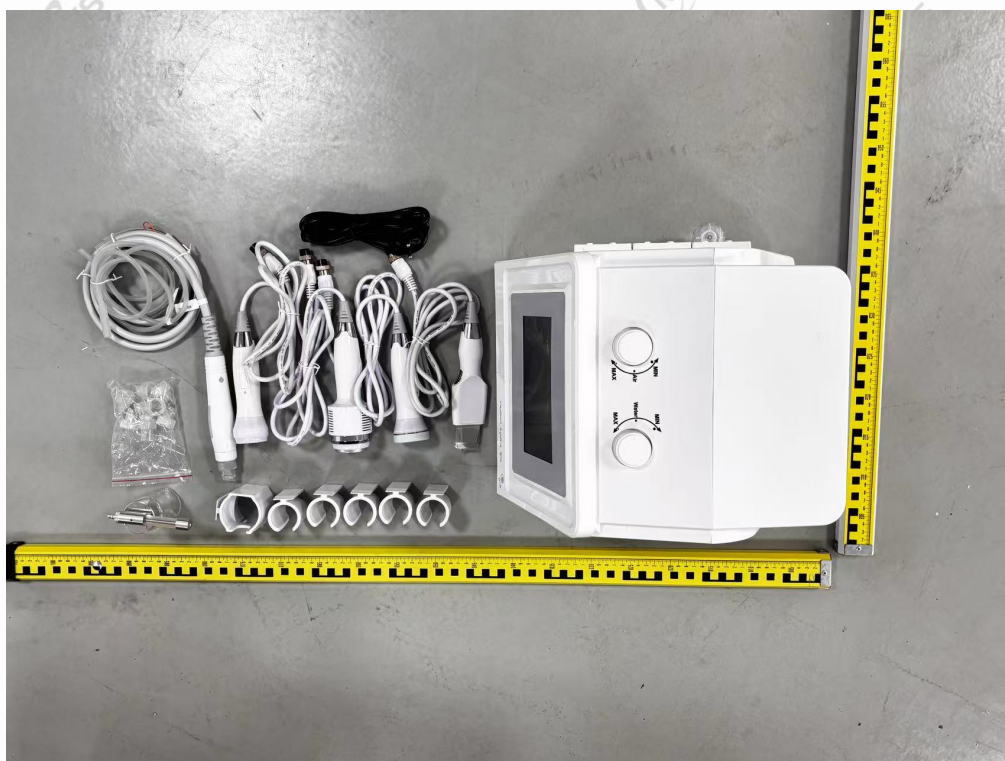

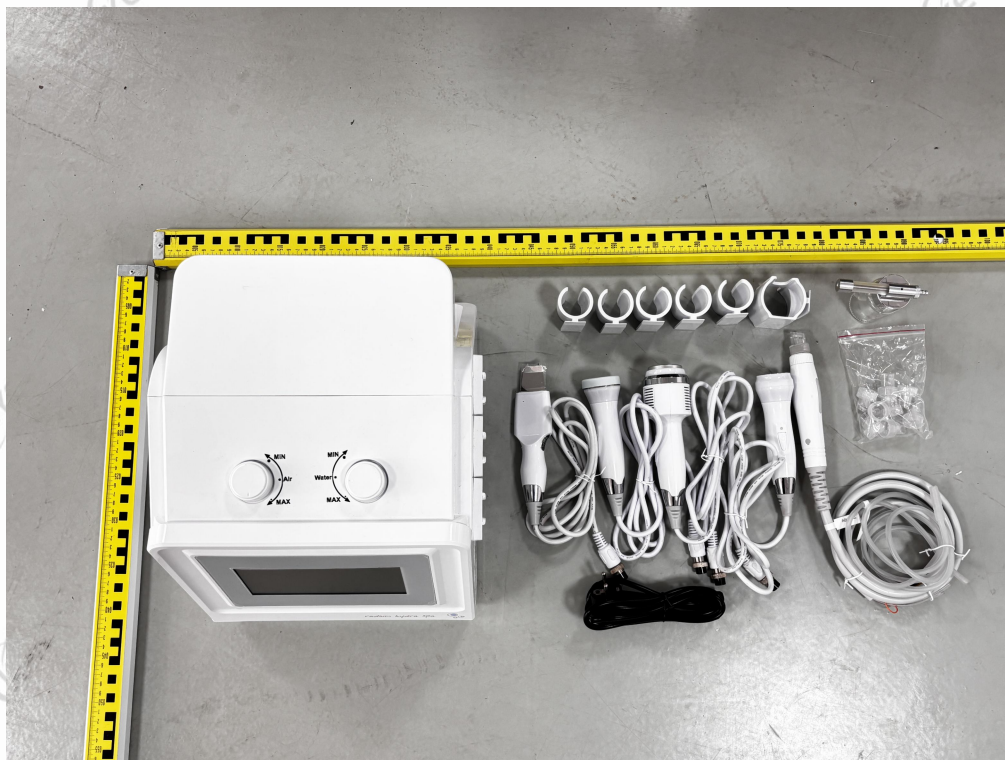



\*\*\*\* End of Report \*\*\*\*